



DATA SHEET		Date	26-Jun-25
Model	UMA120F-7R5-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

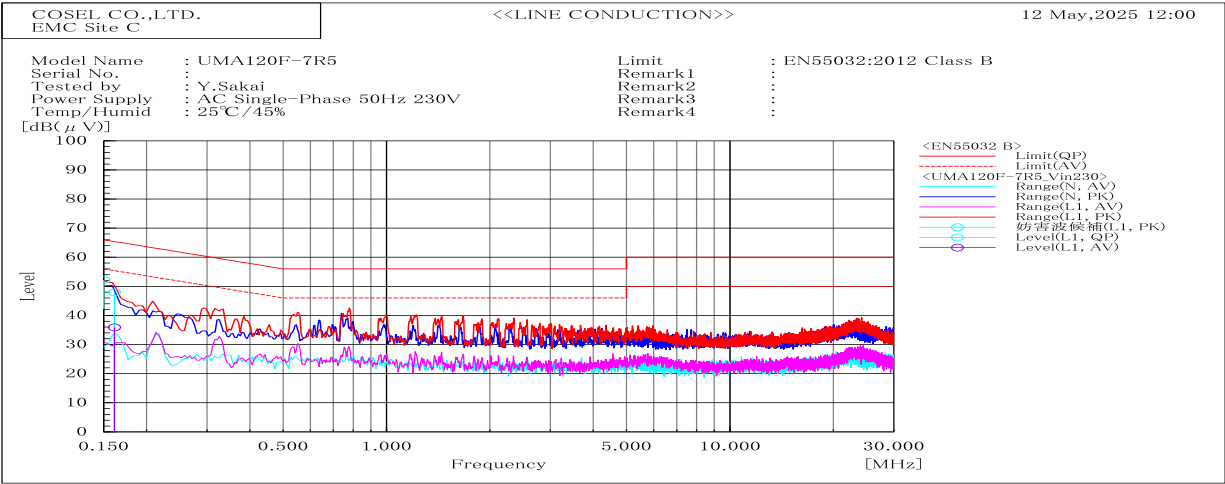


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.161	L1	47.9	35.9	65.4	55.4	17.5	19.5	Pass	

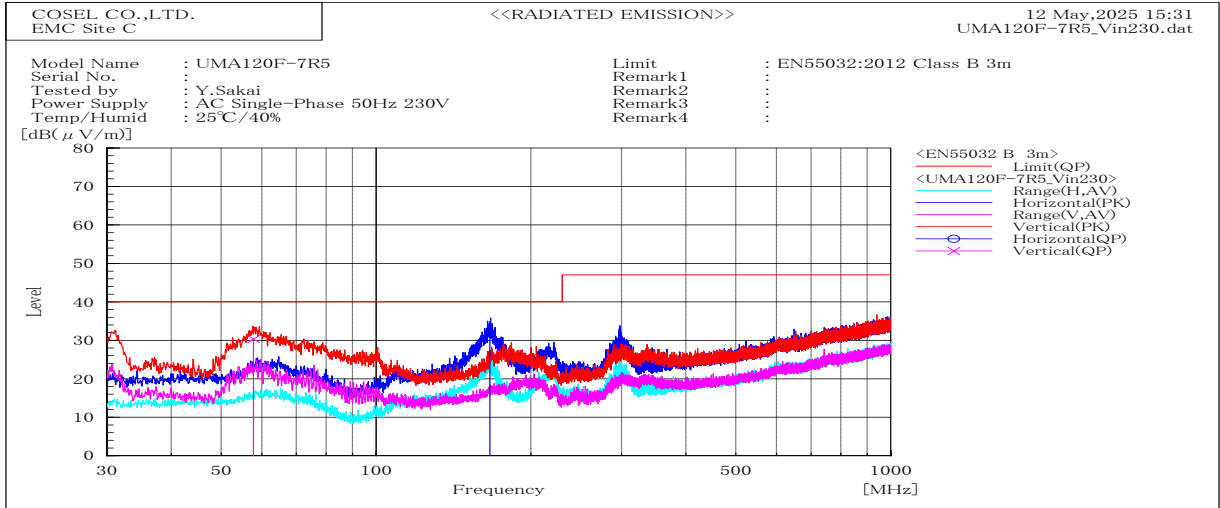


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
57.773	V	Stable	30.4	40	9.6	Pass	100	276.4	
166.418	H	Stable	30.9	40	9.1	Pass	189.6	149.9	

DATA SHEET		Date	26-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

1. Line conduction

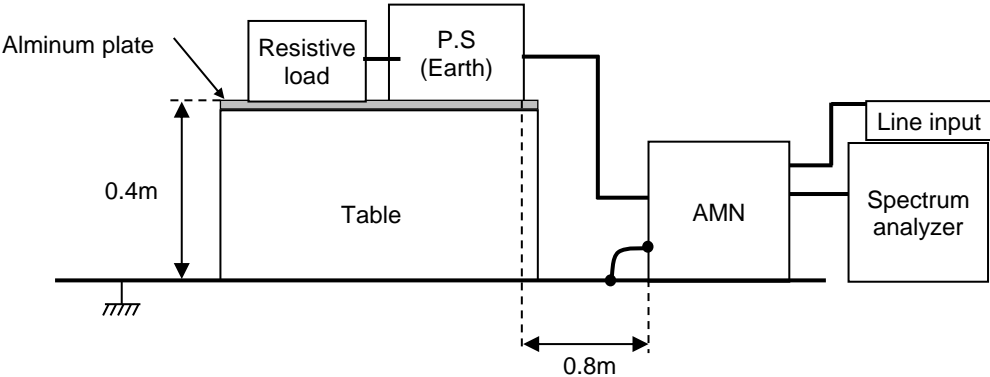

2. Radiated emission

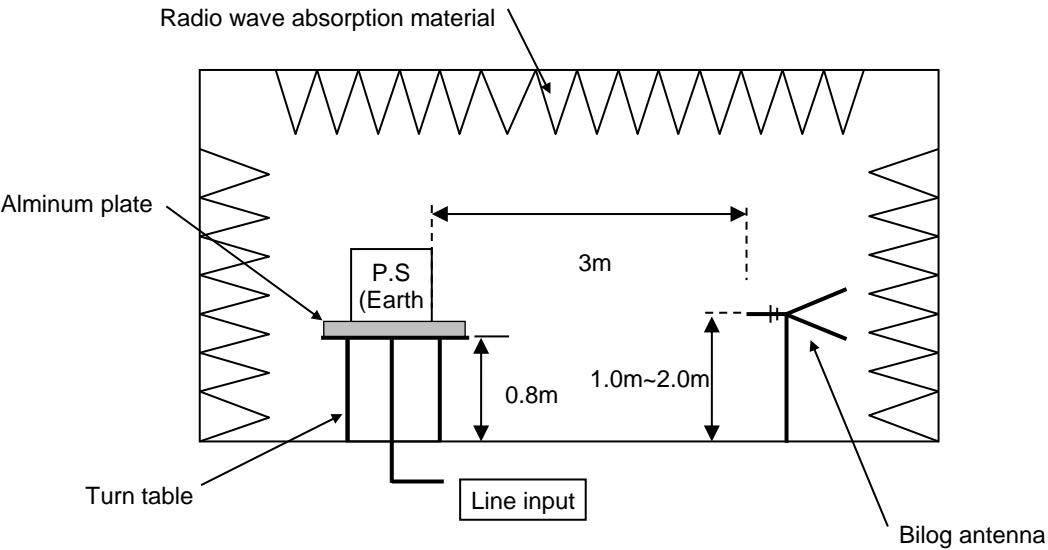


Conditions

Test : EMI
Model Name : UMA120F-7R5-Y

○Photographs of Test Set-Up

1. LINE CONDUCTION

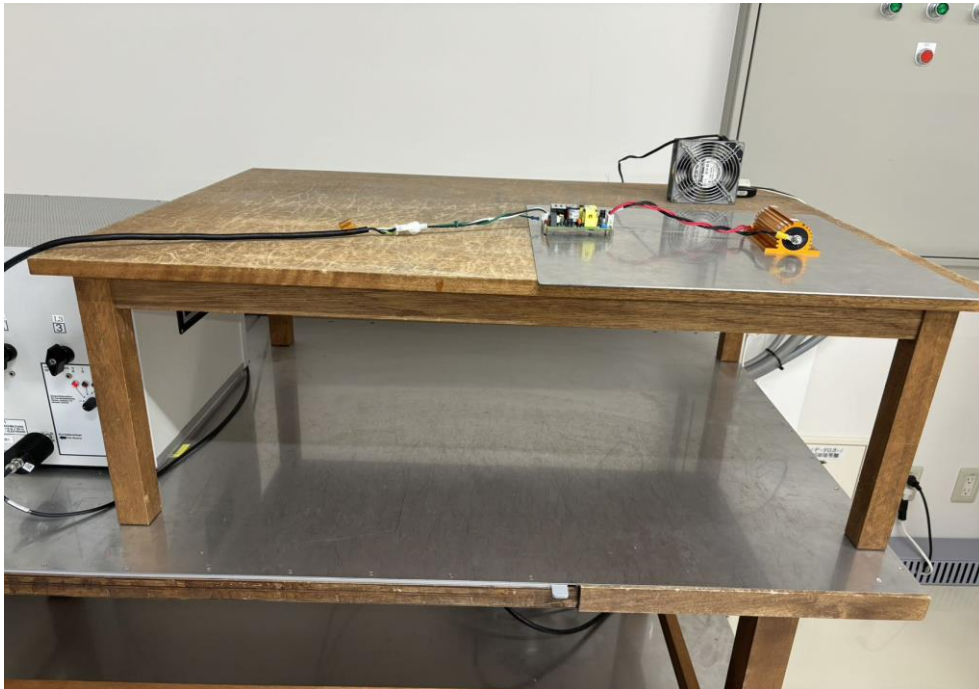

2. RADIATED EMISSION

