



DATA SHEET

Model		UMA30F-24	Date	03-Feb-23
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	A.Mukai

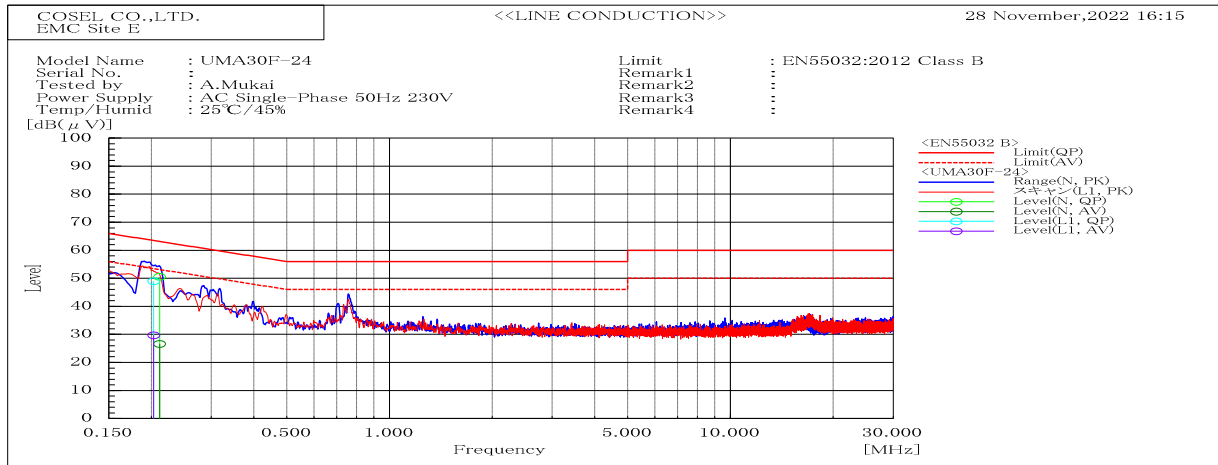


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.203	L1	49	29.7	63.5	53.5	14.5	23.8	Pass	
0.211	N	50.5	26.6	63.1	53.1	12.6	26.5	Pass	

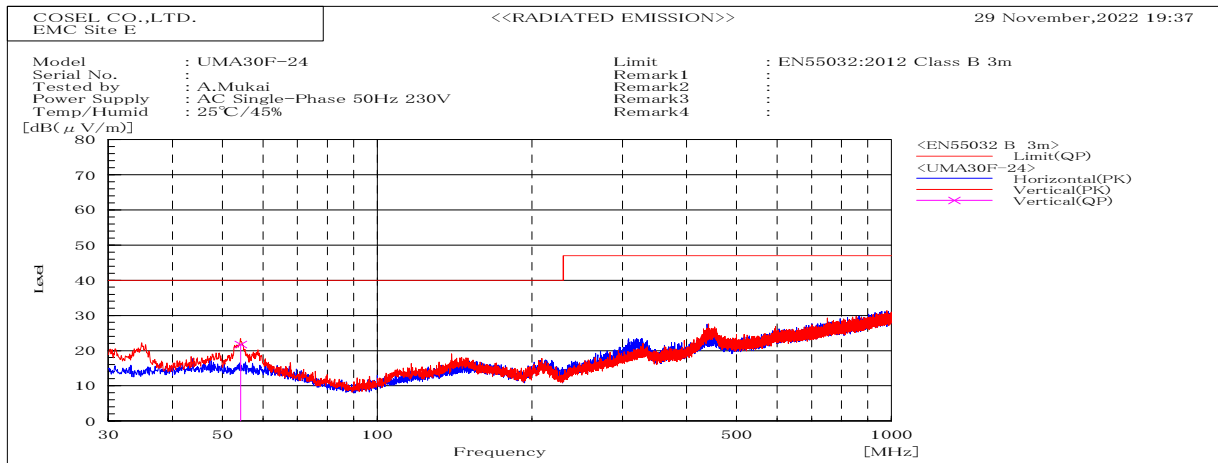


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
54.296	V	Stable	21.7	40	18.3	Pass	100.3	268.7	

DATA SHEET		Date	03-Feb-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

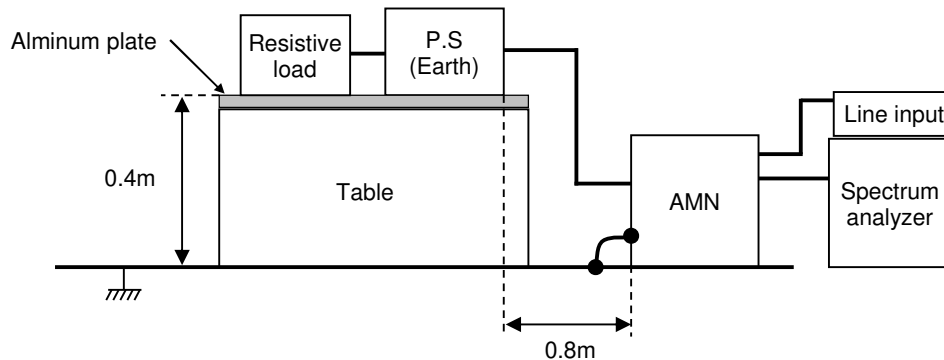


2. Radiated emission

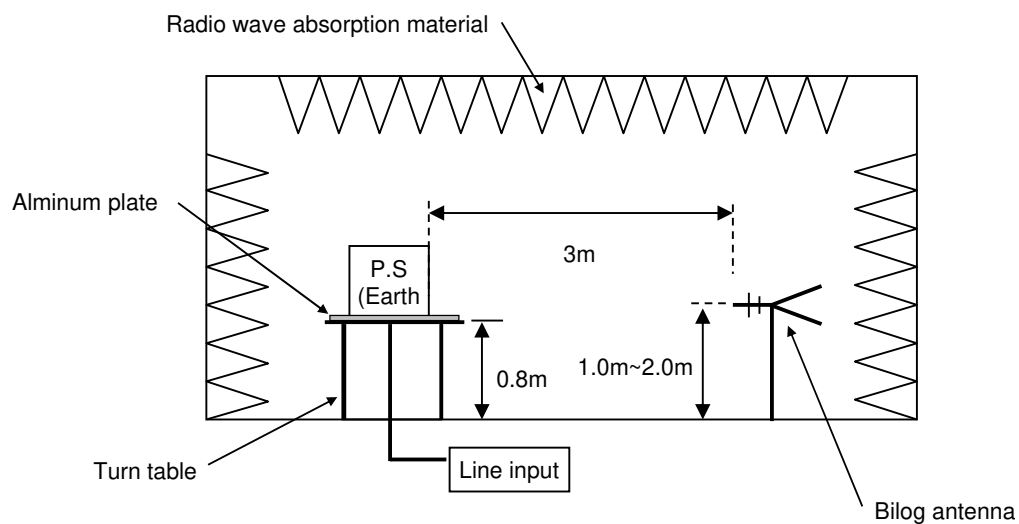

Conditions

Test : EMI
Model Name: UMA30F-24

Photographs of Test Set-Up

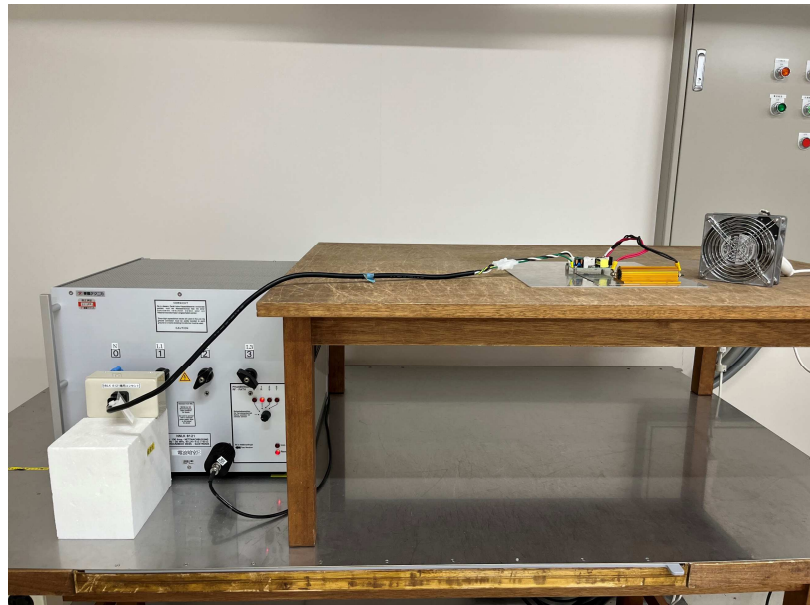1. LINE CONDUCTION**2. RADIATED EMISSION**