


UMA30F-48 Expected Life (Aluminum electrolytic capacitor)

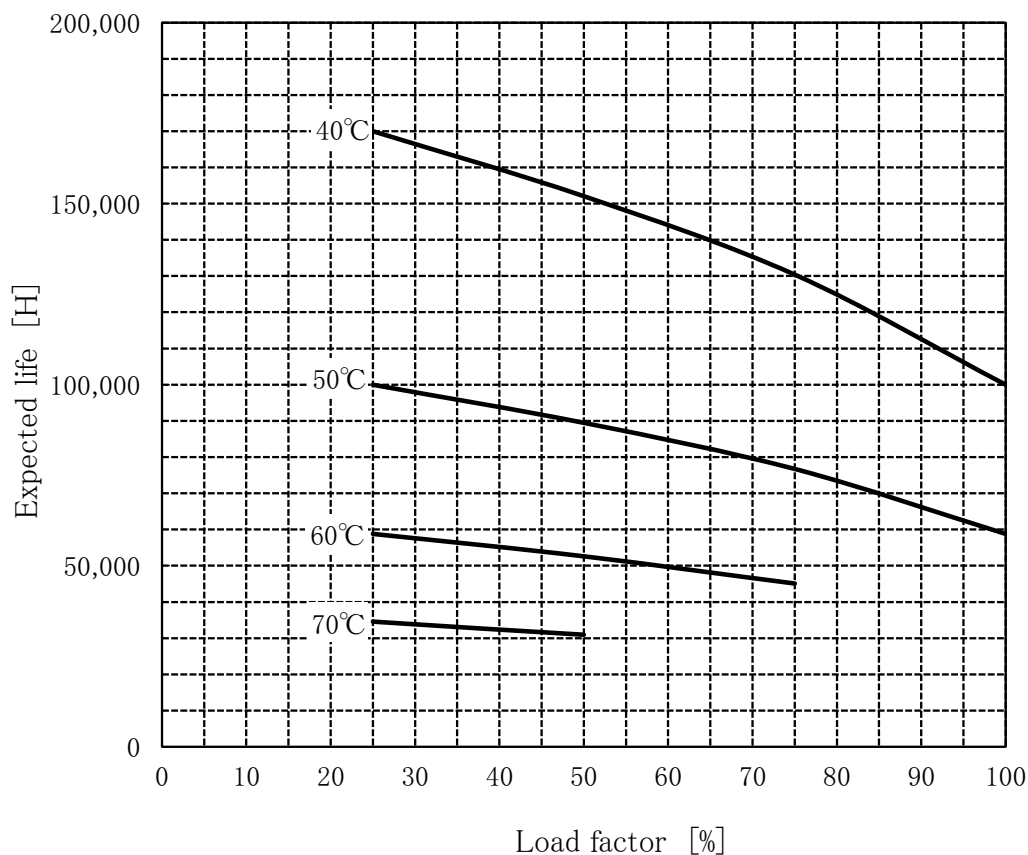

- Above expected life time is calculated according our calculation standard.
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.

Conditions

(1)Input voltage

AC100-264V 50Hz

(2)Output voltage/
current


DC OUTPUT	Load factor			
	100%	75%	50%	25%
48V	0.65A	0.49A	0.33A	0.16A
—	—	—	—	—
—	—	—	—	—

(3)Cooling method

Convection

(4)Mounting method

Refer below

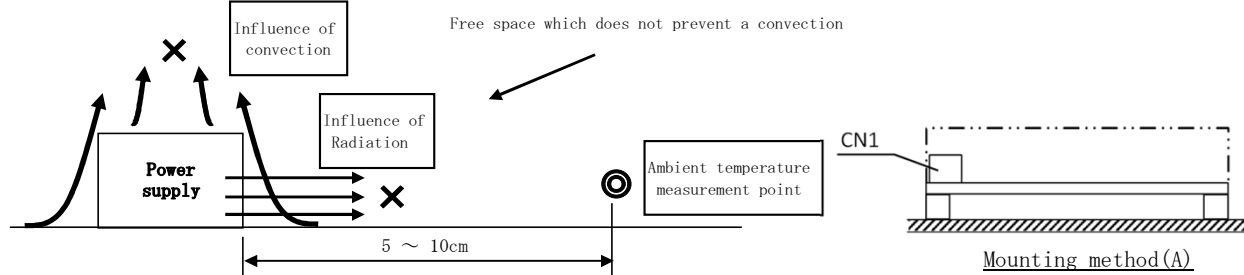

With the ambient temperature of graph, it measures in the environment of a figure.