



DATA SHEET		Date	03-Feb-23
Model	UMA60F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

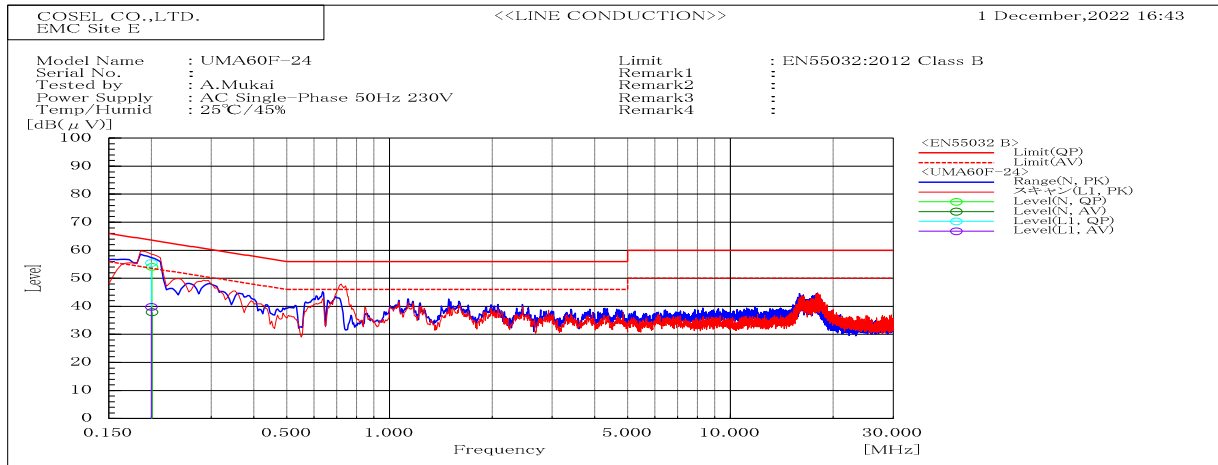


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.2	L1	55.5	39.8	63.6	53.6	8.1	13.8	Pass	
0.201	N	54.1	37.9	63.6	53.6	9.5	15.7	Pass	

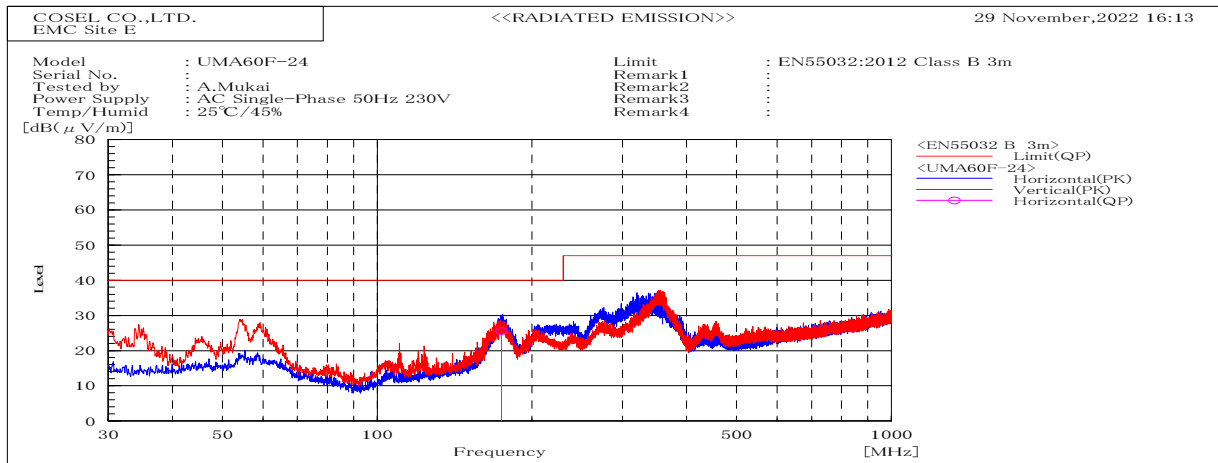


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
174.59	H	Stable	25.5	40	14.5	Pass	188.1	186.6	

DATA SHEET		Date	03-Feb-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

### 1. Line conduction

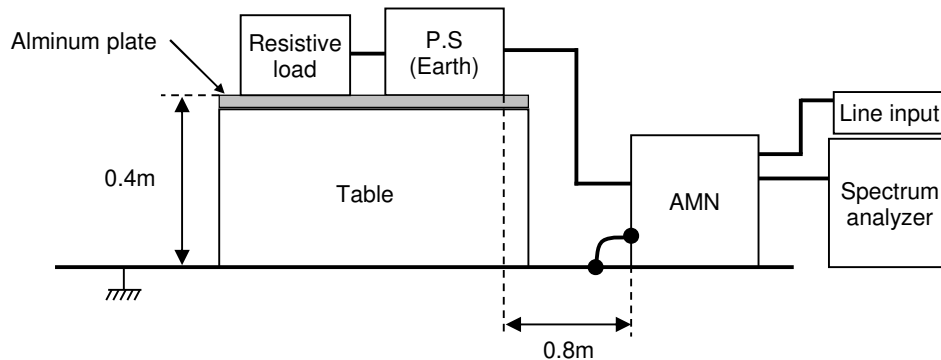

### 2. Radiated emission

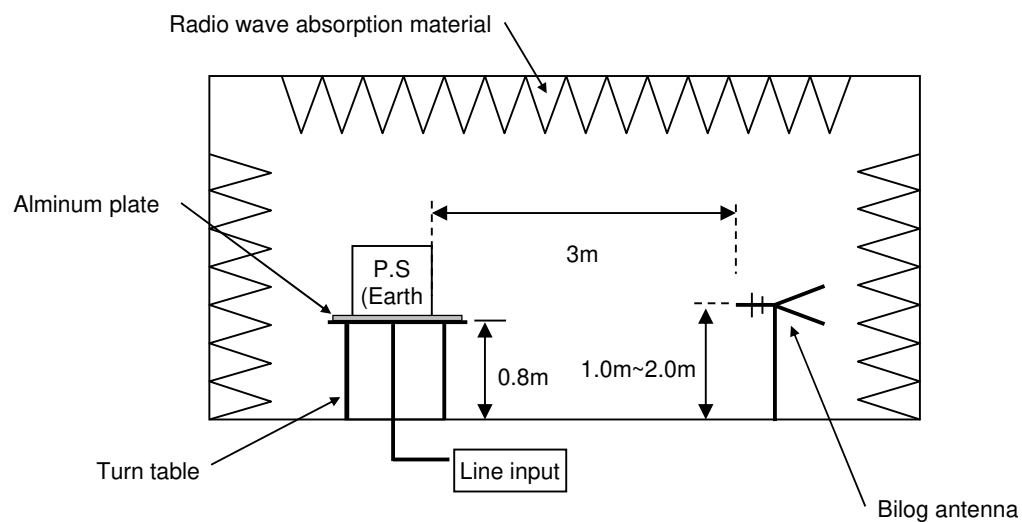


## Conditions

Test : EMI  
Model Name: UMA60F-24

Photographs of Test Set-Up

### 1. LINE CONDUCTION

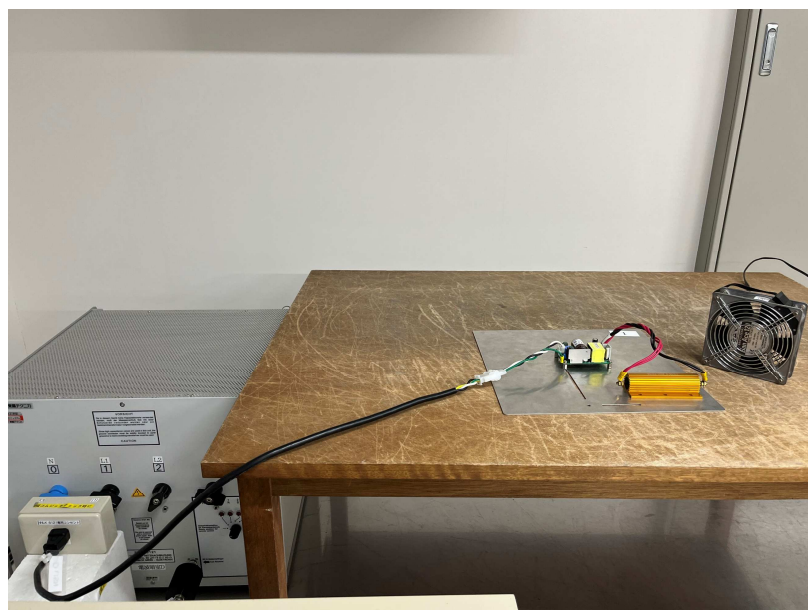

### 2. RADIATED EMISSION

