



DATA SHEET		Date	03-Feb-23
Model	UMA60F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

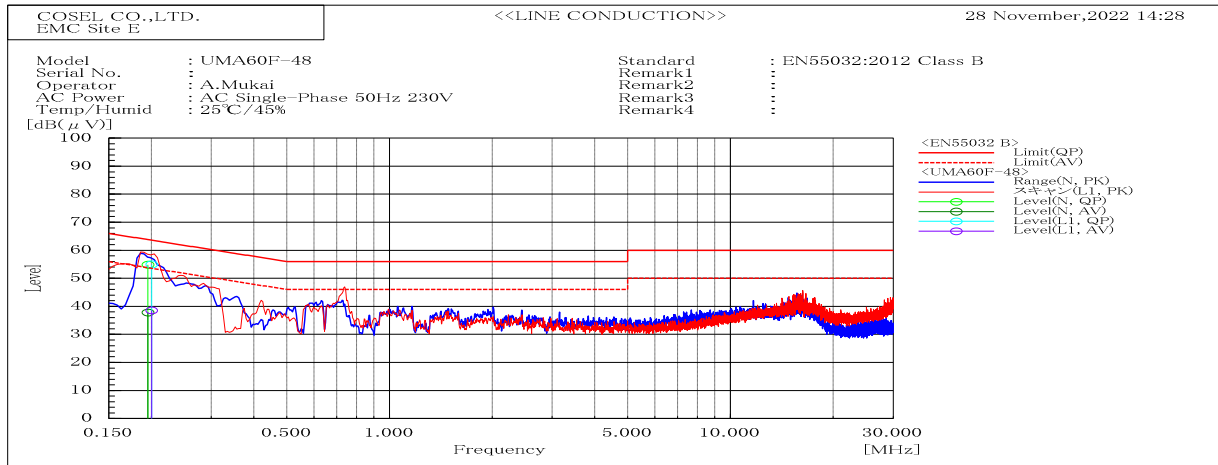


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.196	N	54.8	37.8	63.8	53.8	9	16	Pass	
0.201	L1	55	38.6	63.6	53.6	8.6	15	Pass	

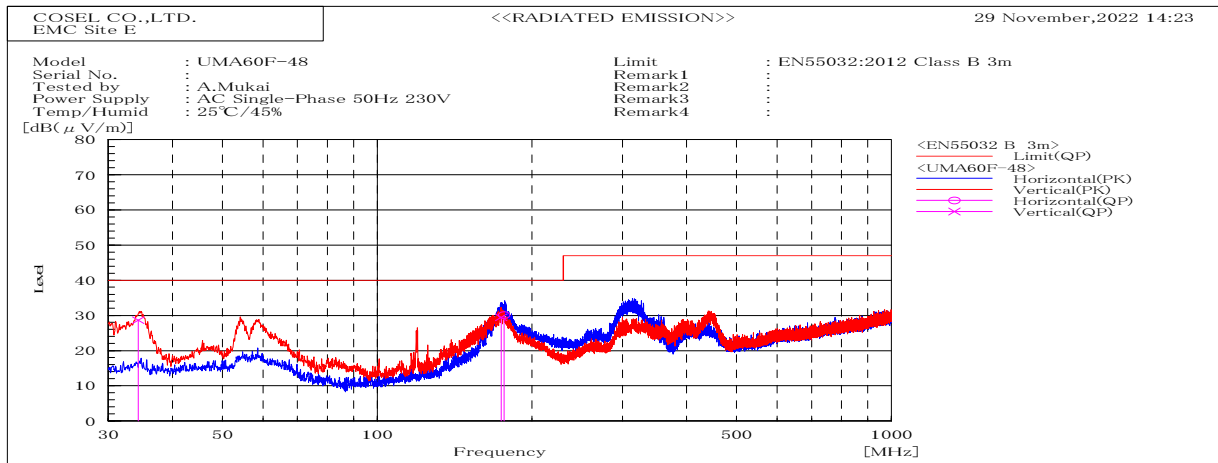


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
34.29	V	Stable	28.7	40	11.3	Pass	100.2	58.7	
174.229	V	Stable	29.5	40	10.5	Pass	100.2	191.7	
176.501	H	Stable	30.1	40	9.9	Pass	199.7	169	

DATA SHEET		Date	03-Feb-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

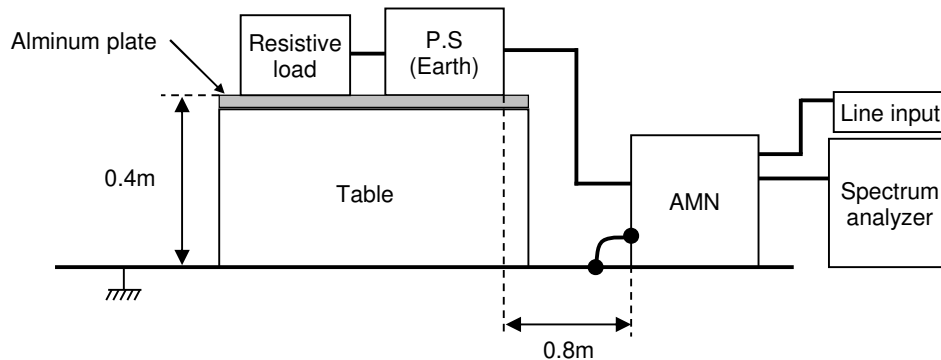

2. Radiated emission

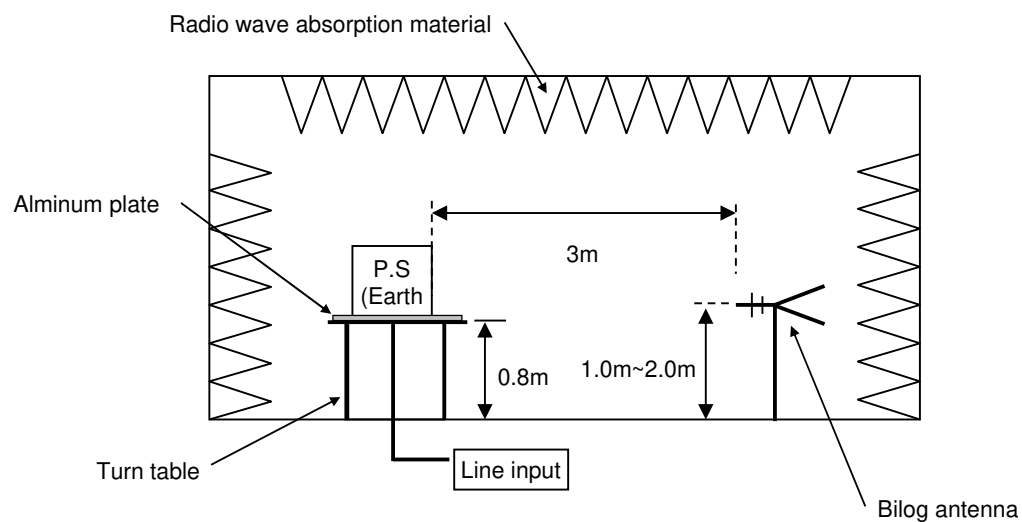


Conditions

Test : EMI
Model Name: UMA60F-48

Photographs of Test Set-Up

1. LINE CONDUCTION

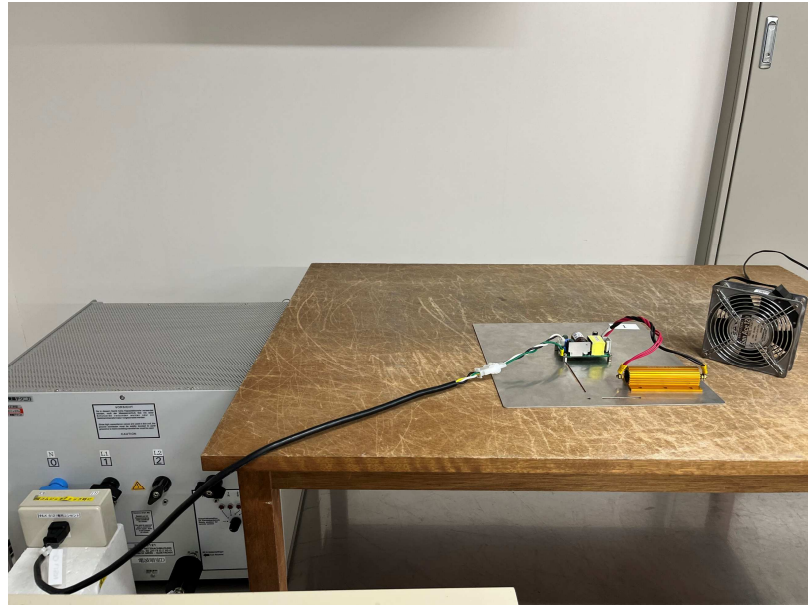

2. RADIATED EMISSION

