





DATA SHEET		Date	07-Jan-26
Model	UMHA120F-12-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

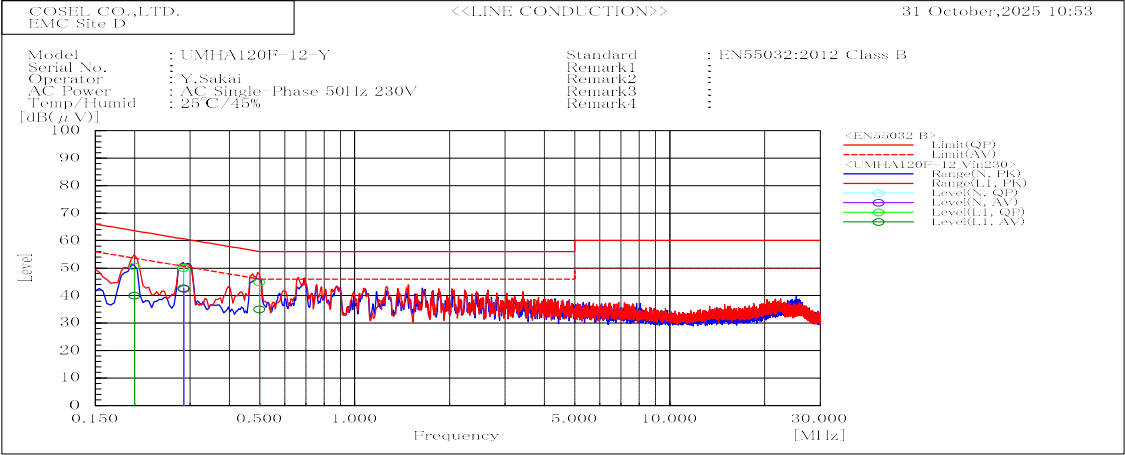

Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.286	L1	50	42.6	60.6	50.6	10.6	8	Pass	
0.2	L1	50.6	39.9	63.6	53.6	13	13.7	Pass	
0.498	L1	44.9	35	56	46	11.1	11	Pass	
0.287	N	50	42.4	60.6	50.6	10.6	8.2	Pass	

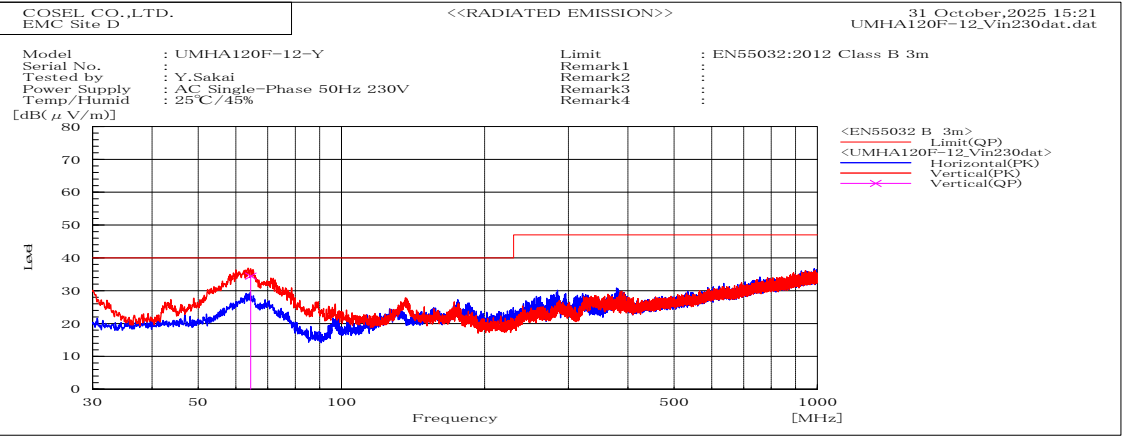


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
64.486	V	Stable	34.4	40	5.6	Pass	100	304.9	




DATA SHEET		Date	07-Jan-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

1. Line conduction

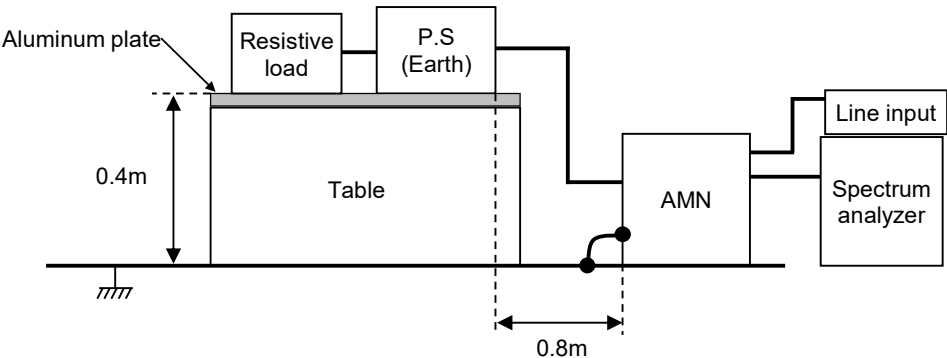

2. Radiated emission

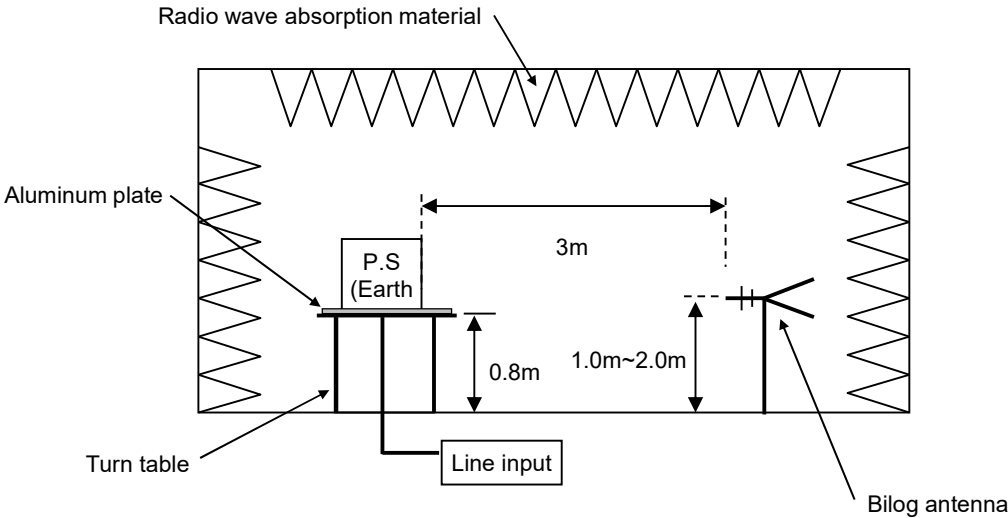




Conditions

Test : EMI
Model Name: UMHA120F-12-Y

○Photographs of Test Set-Up

1.LINE CONDUCTION

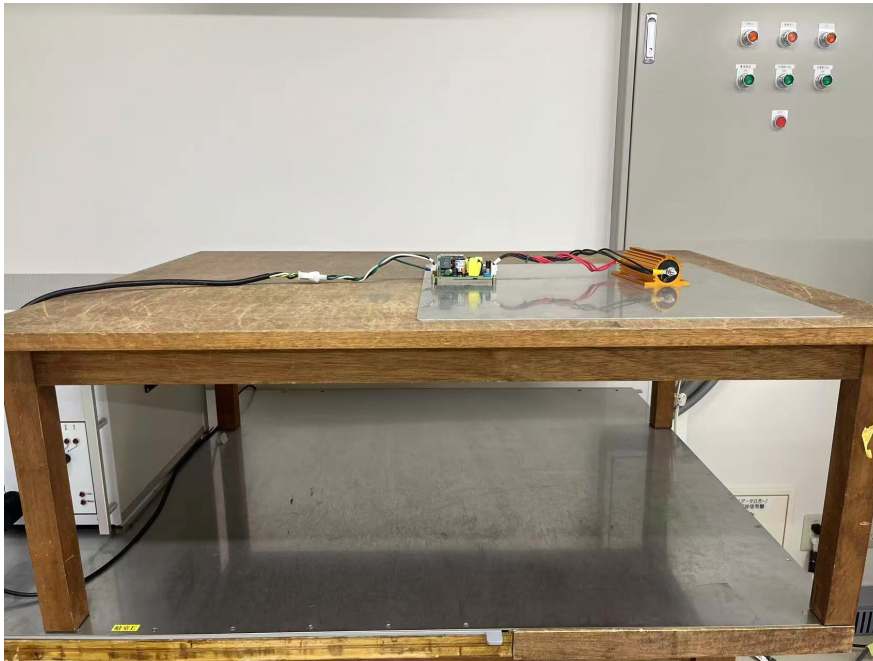

2.RADIATED EMISSION

