





DATA SHEET		Date	07-Jan-26
Model	UMHA120F-15-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

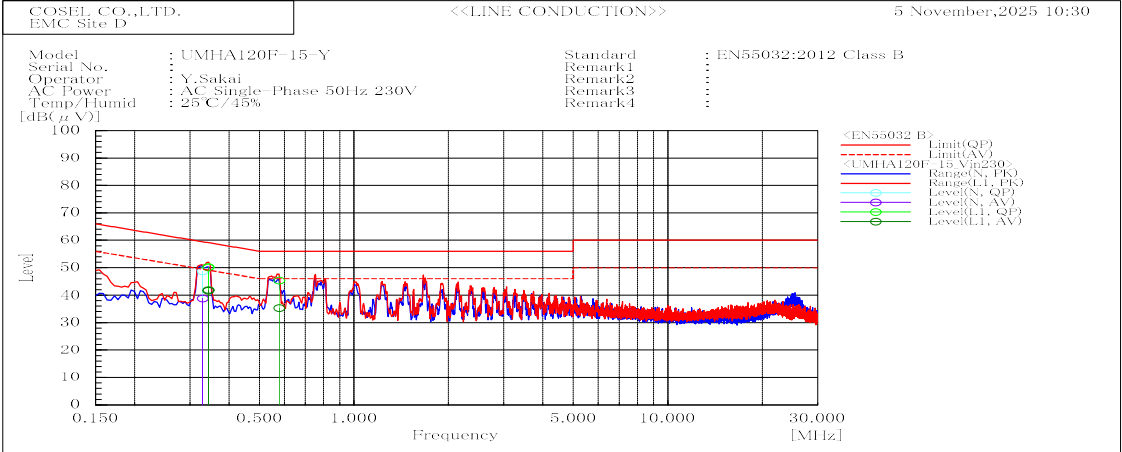


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.329	N	48.7	38.8	59.5	49.5	10.8	10.7	Pass	
0.344	L1	50.2	41.9	59.1	49.1	8.9	7.2	Pass	
0.577	L1	45.3	35.3	56	46	10.7	10.7	Pass	
0.343	L1	50.1	41.7	59.1	49.1	9	7.4	Pass	

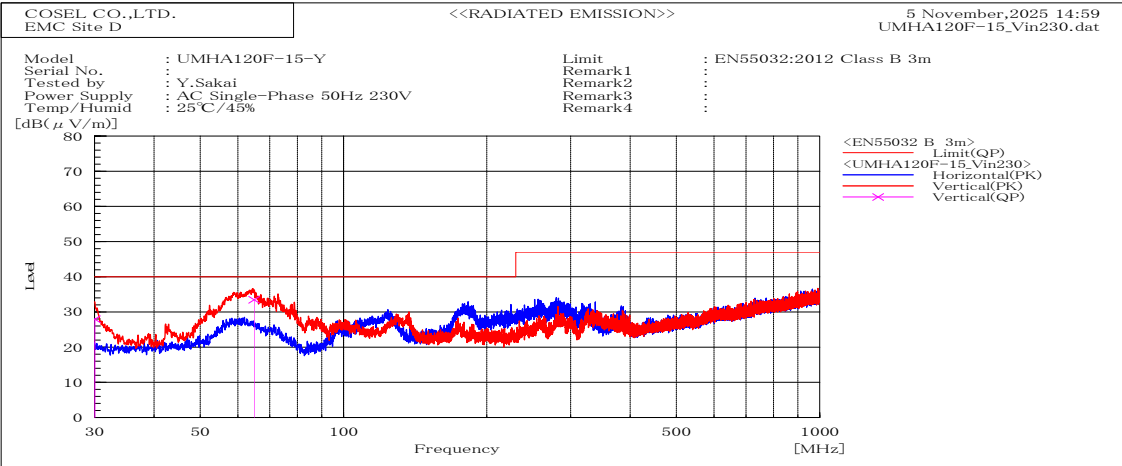


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
64.879	V	Stable	33.5	40	6.5	Pass	100.2	0	
30.059	V	Stable	28	40	12	Pass	100.5	328.7	

DATA SHEET		Date	07-Jan-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

1. Line conduction

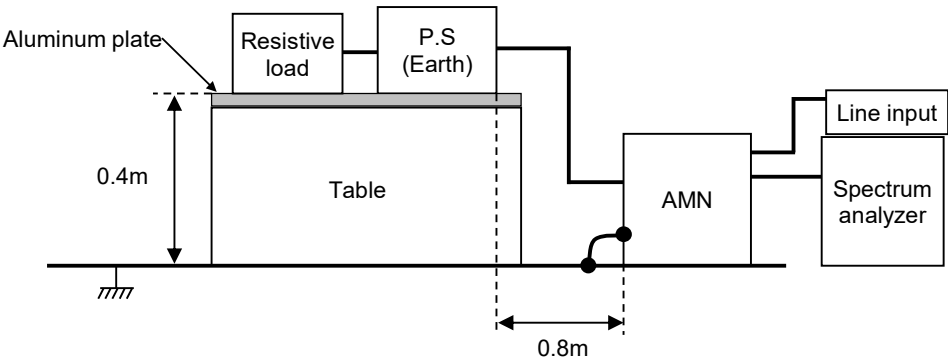

2. Radiated emission

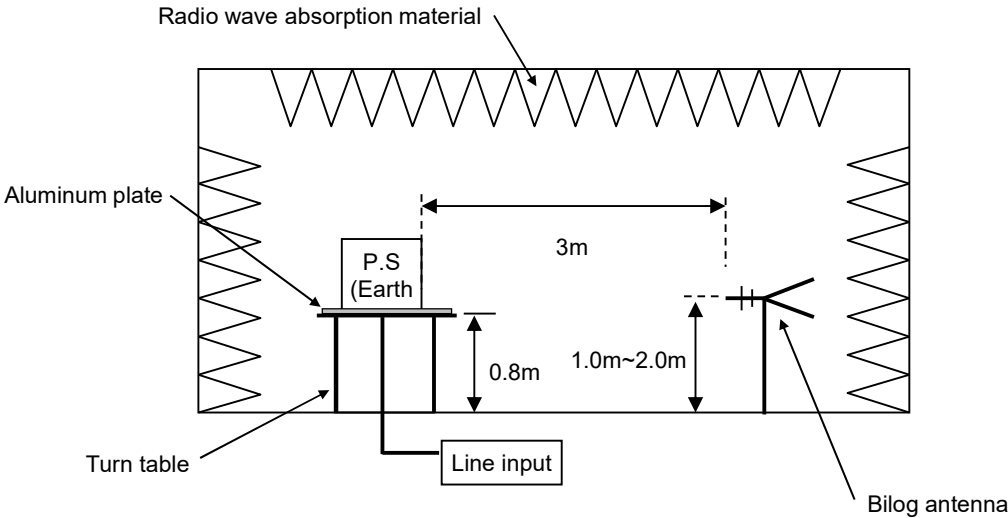




Conditions

Test : EMI
Model Name: UMHA120F-15-Y

○Photographs of Test Set-Up

1.LINE CONDUCTION

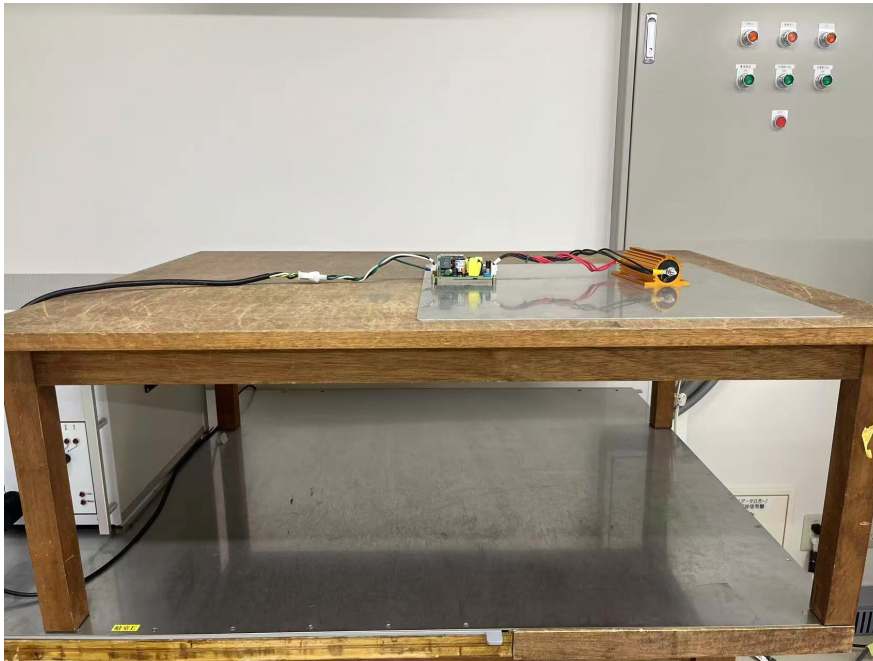

2.RADIATED EMISSION

