





DATA SHEET		Date	07-Jan-26
Model	UMHA120F-18-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

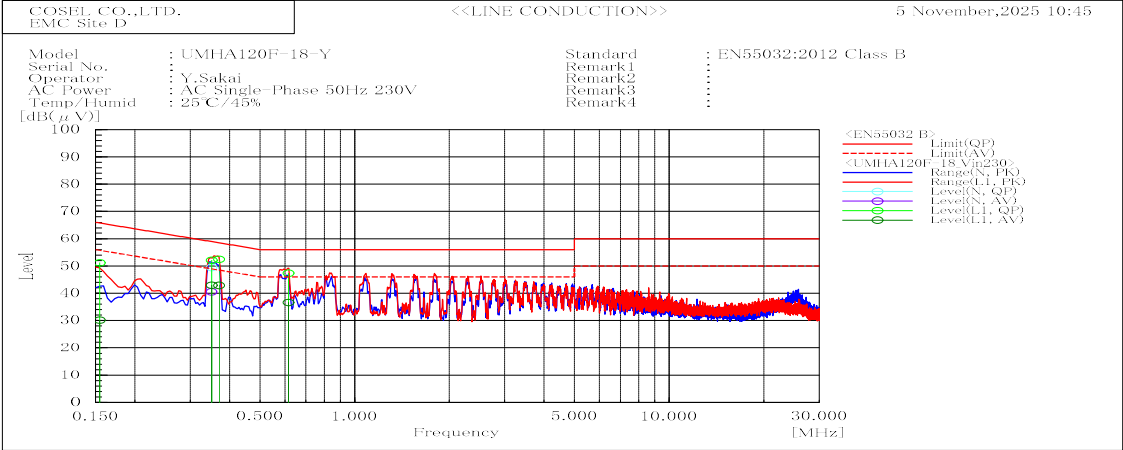

Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.35	N	49.5	40.6	59	49	9.5	8.4	Pass	
0.351	L1	52.1	43	58.9	48.9	6.8	5.9	Pass	
0.37	L1	52.5	42.9	58.5	48.5	6	5.6	Pass	
0.154	L1	51.2	30.2	65.8	55.8	14.6	25.6	Pass	
0.616	L1	47.4	36.7	56	46	8.6	9.3	Pass	

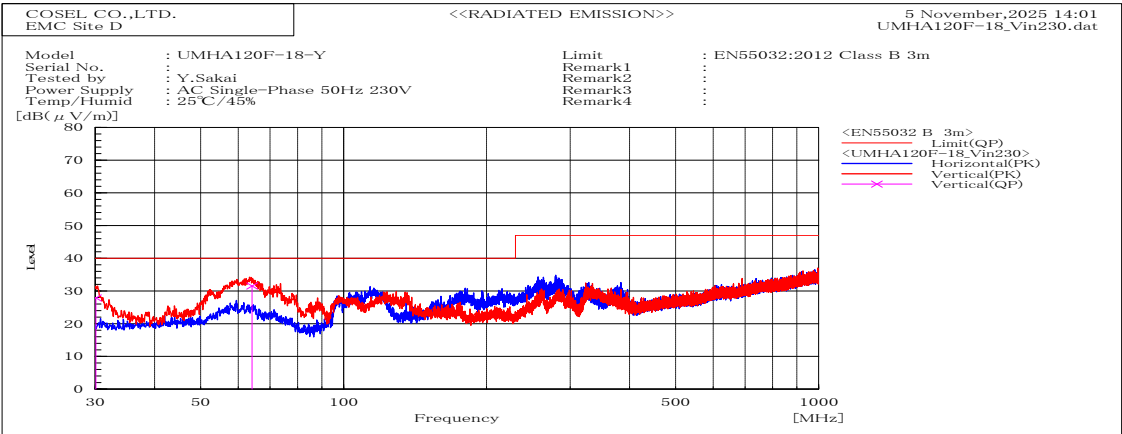


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
64.146	V	Stable	31.5	40	8.5	Pass	100.2	0	
30.096	V	Stable	27.9	40	12.1	Pass	100.2	91.6	




DATA SHEET		Date	07-Jan-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

1. Line conduction

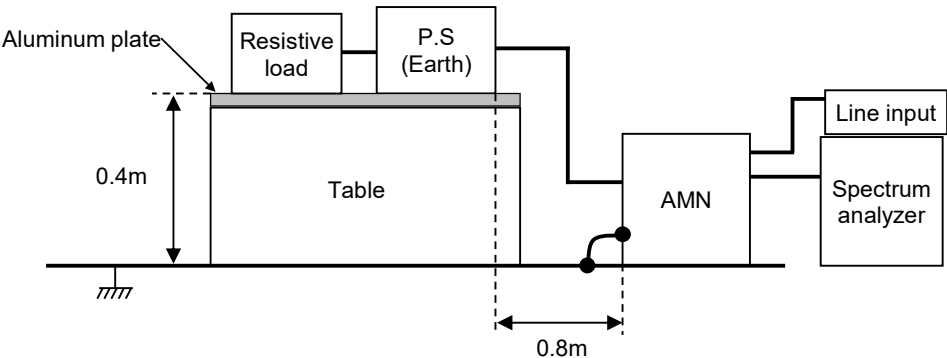

2. Radiated emission

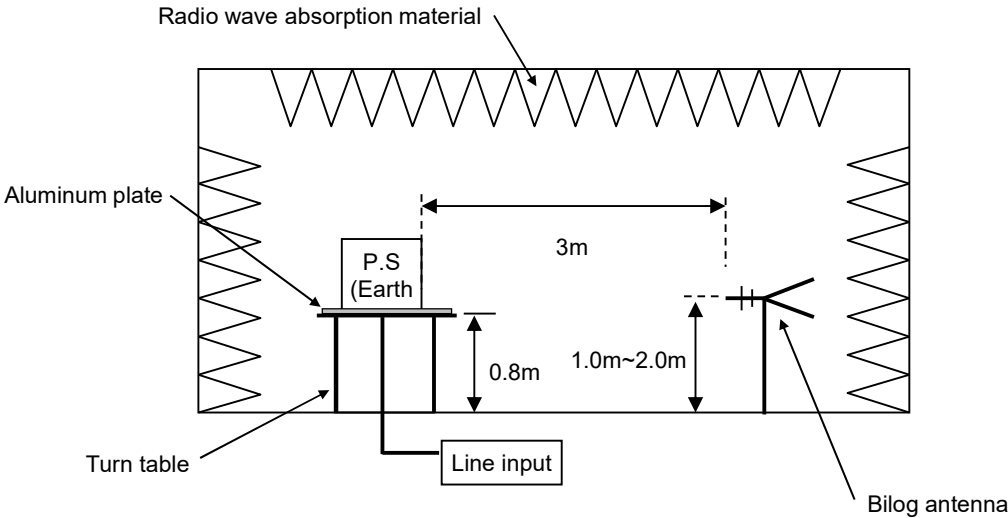




Conditions

Test : EMI
Model Name: UMHA120F-18-Y

○Photographs of Test Set-Up

1.LINE CONDUCTION

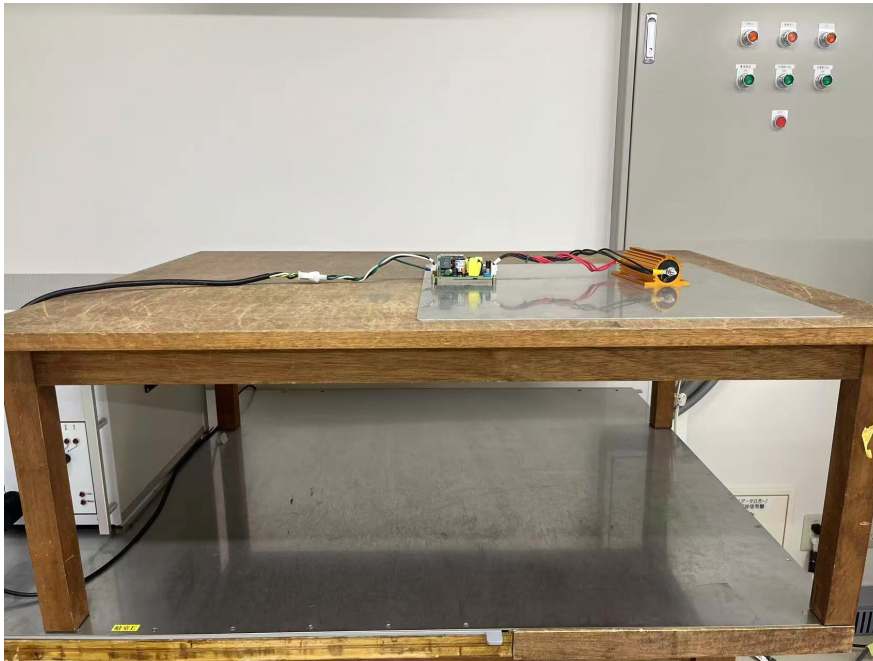

2.RADIATED EMISSION

