





DATA SHEET		Date	07-Jan-26
Model	UMHA120F-24-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

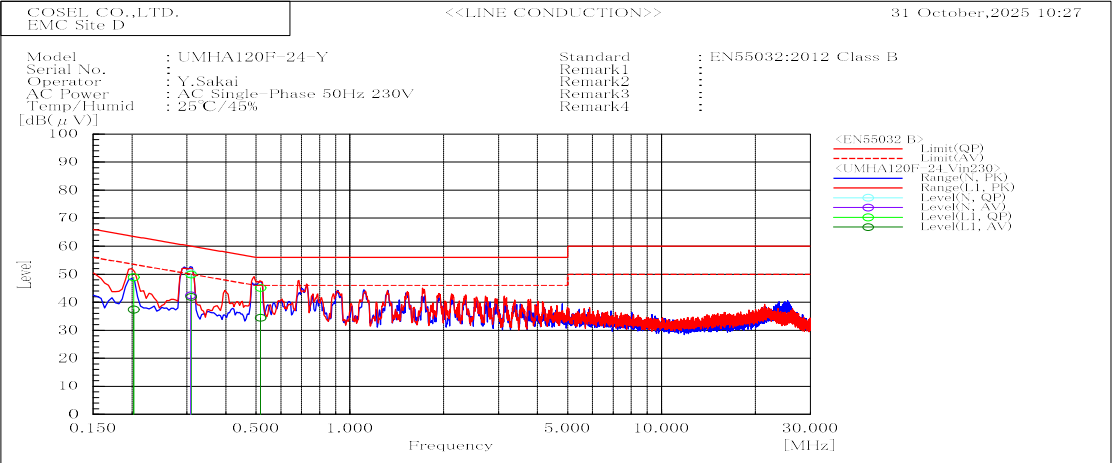

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.309	L1	49.9	41.9	60	50	10.1	8.1	Pass	
0.516	L1	45.1	34.5	56	46	10.9	11.5	Pass	
0.202	L1	48.9	37.4	63.5	53.5	14.6	16.1	Pass	
0.309	N	50.3	42.5	60	50	9.7	7.5	Pass	

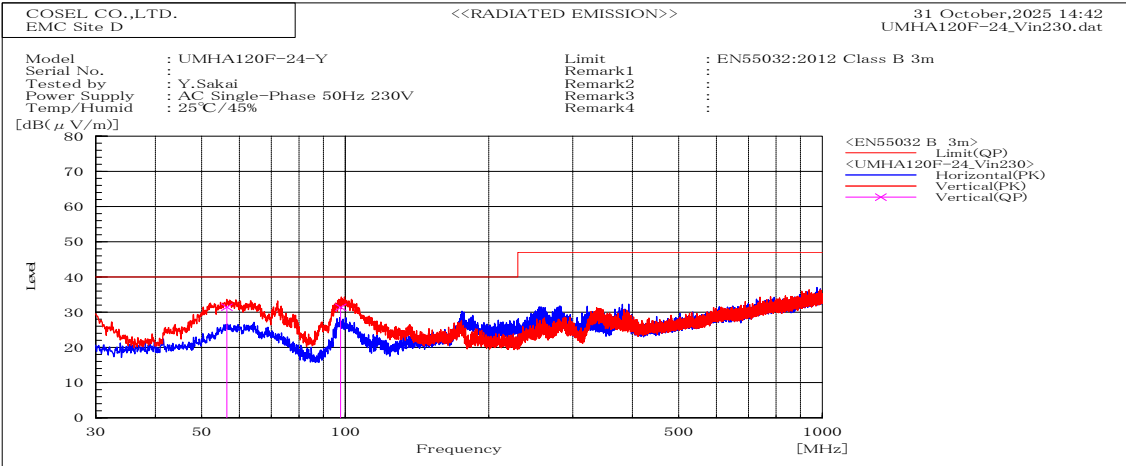


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP					
97.788	V	Stable	31.4	40	8.6	Pass	100.2	332.1	
56.508	V	Stable	31.4	40	8.6	Pass	100.5	334	




DATA SHEET		Date	07-Jan-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

1. Line conduction

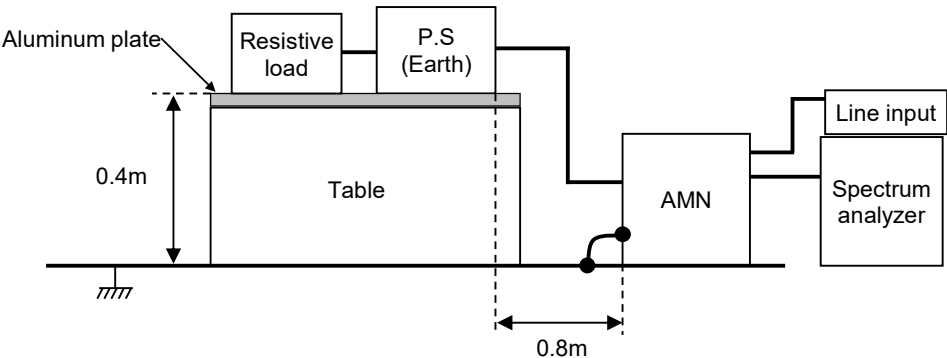

2. Radiated emission

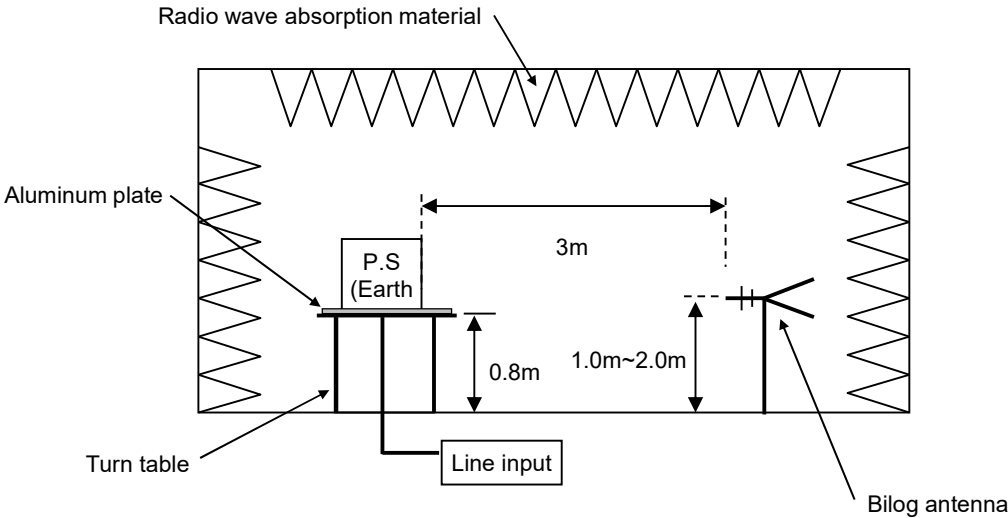




Conditions

Test : EMI
Model Name: UMHA120F-24-Y

○Photographs of Test Set-Up

1.LINE CONDUCTION

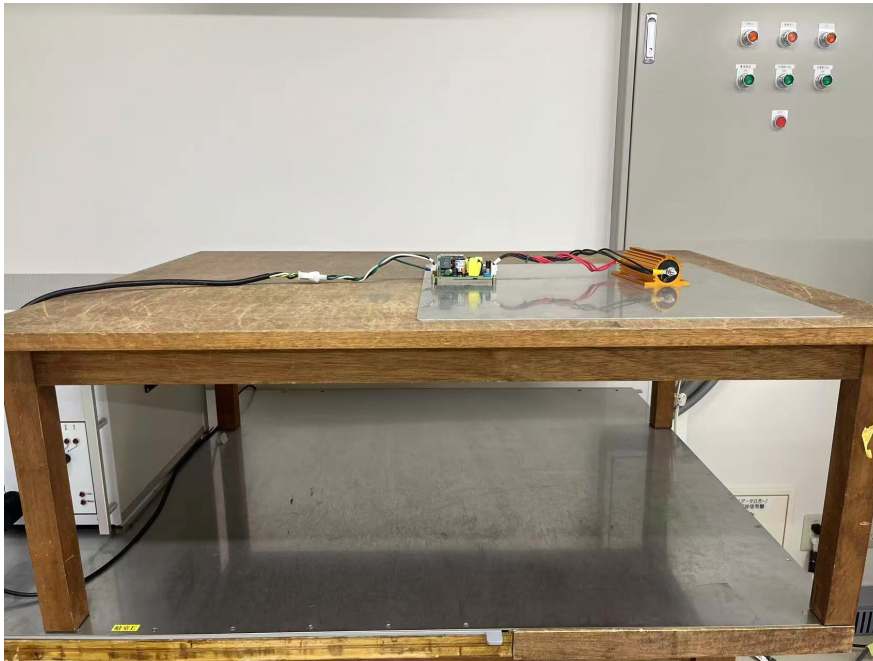

2.RADIATED EMISSION

