





DATA SHEET		Date	07-Jan-26
Model	UMHA120F-48-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

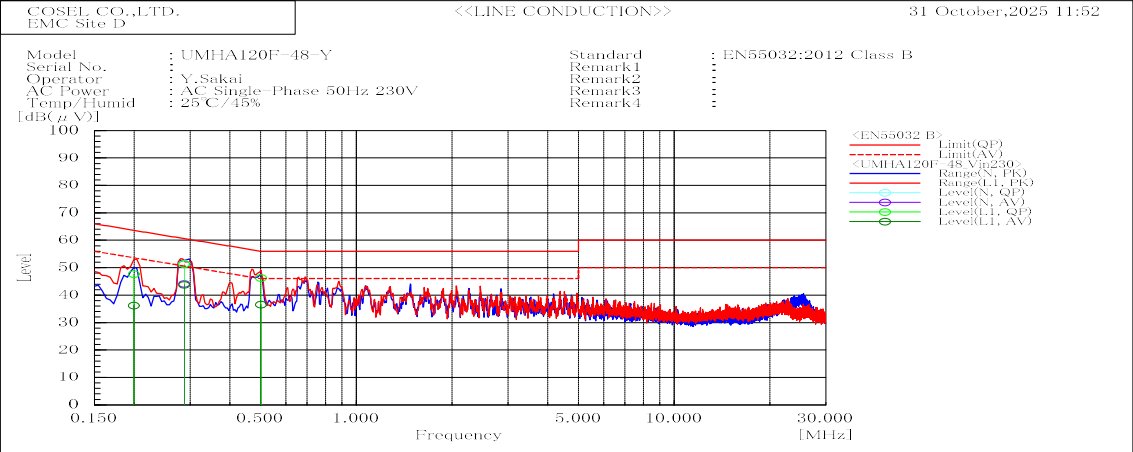

Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.287	L1	51.3	43.8	60.6	50.6	9.3	6.8	Pass	
0.2	L1	47.7	36.2	63.6	53.6	15.9	17.4	Pass	
0.501	L1	46.3	36.5	56	46	9.7	9.5	Pass	
0.287	N	51.4	44.1	60.6	50.6	9.2	6.5	Pass	

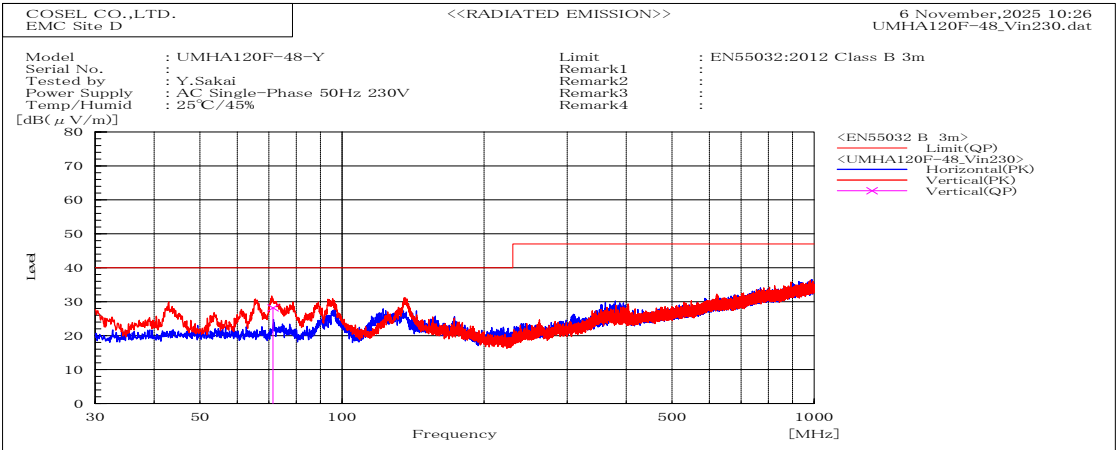


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV	QP	AV					
71.392	V	Stable	28.2		40		11.8	Pass	100	344.2	




DATA SHEET		Date	07-Jan-26
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sakai

1. Line conduction

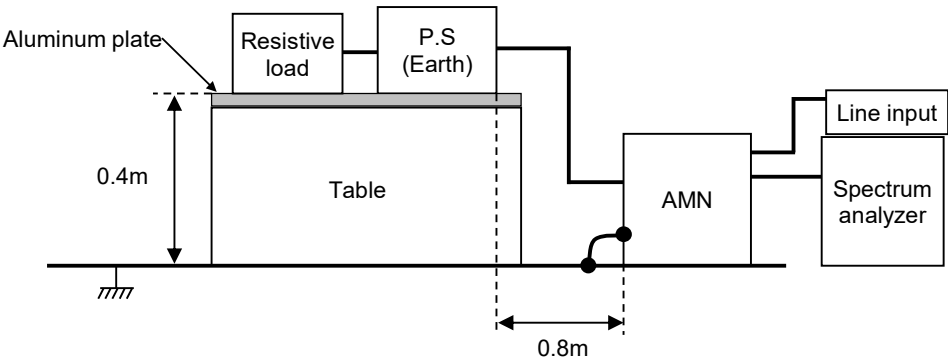

2. Radiated emission

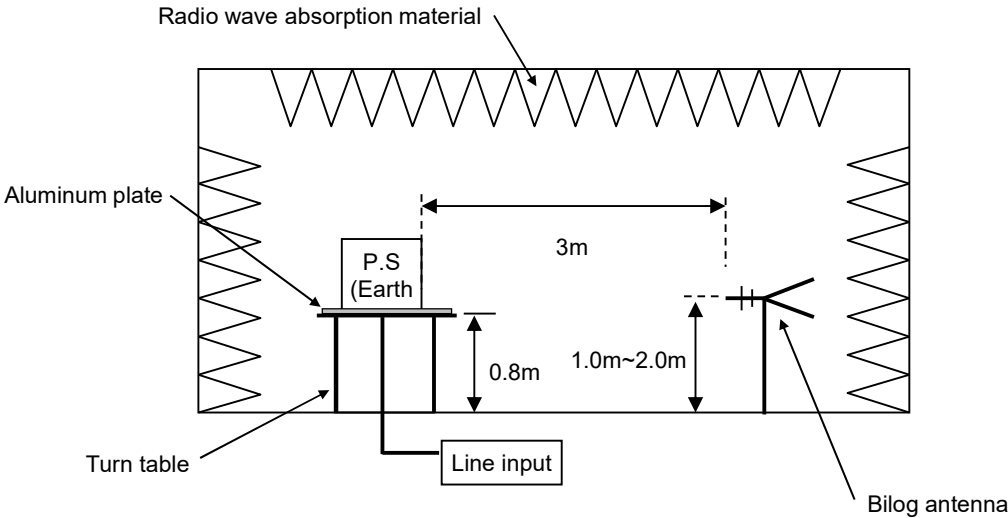




Conditions

Test : EMI
Model Name: UMHA120F-48-Y

○Photographs of Test Set-Up

1.LINE CONDUCTION

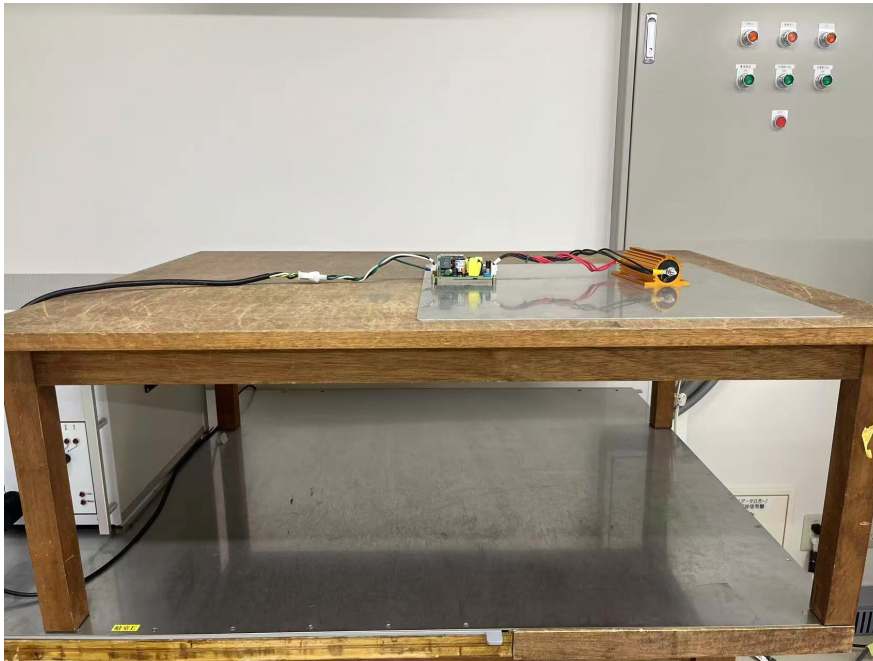

2.RADIATED EMISSION

