



DATA SHEET		Date	19-Jul-21
Model	WBA150B-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

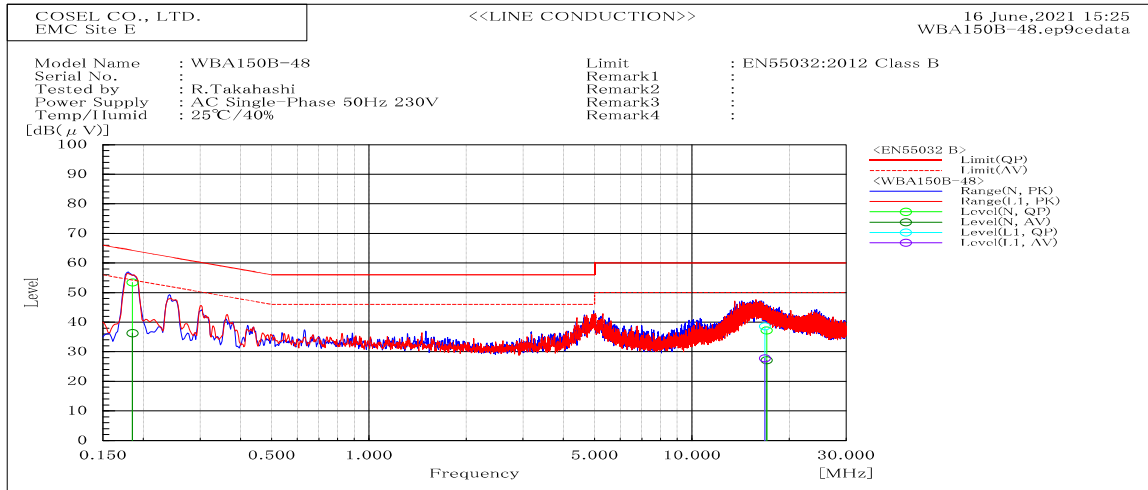


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
16.812	L1	38.6	27.8	60	50	21.4	22.2	Pass	
0.185	N	53.4	36.3	64.2	54.2	10.8	17.9	Pass	
17.045	N	37.2	27.1	60	50	22.8	22.9	Pass	

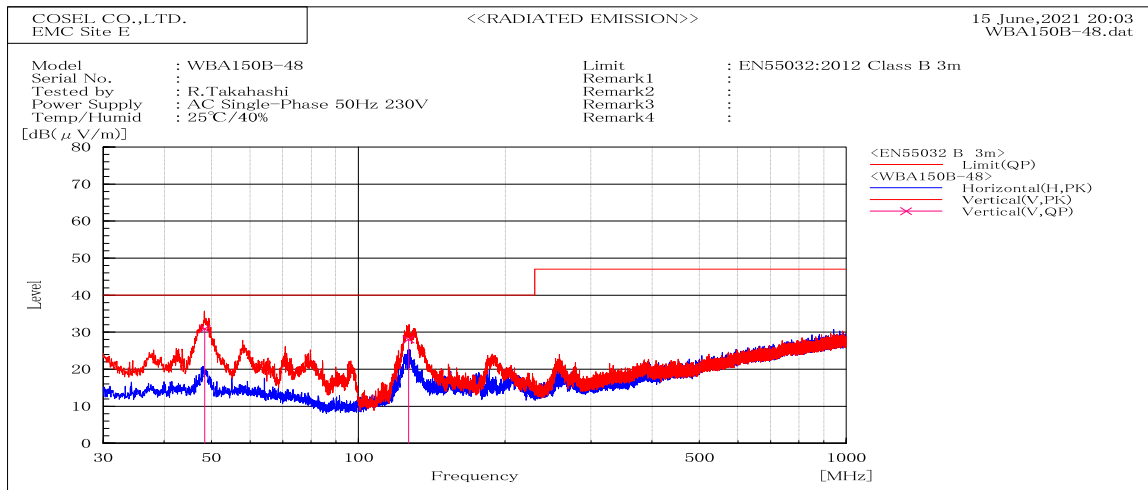


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
126.686	V	Stable	28	40	12	Pass	107.6	0	
48.418	V	Stable	30.9	40	9.1	Pass	100.2	271.3	

DATA SHEET		Date	19-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

1. Line conduction

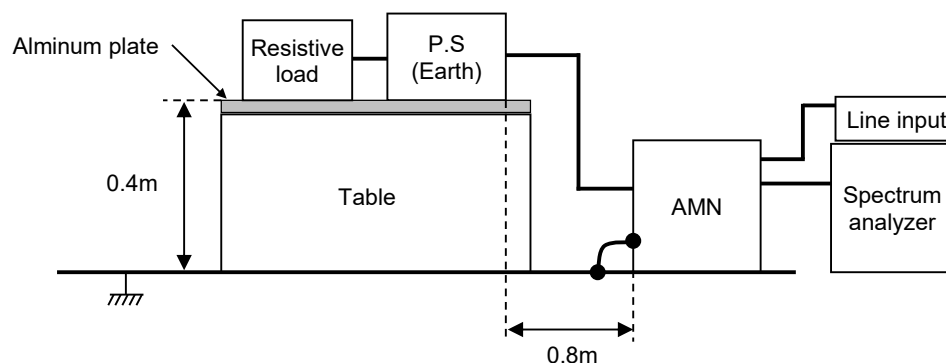

2. Radiated emission

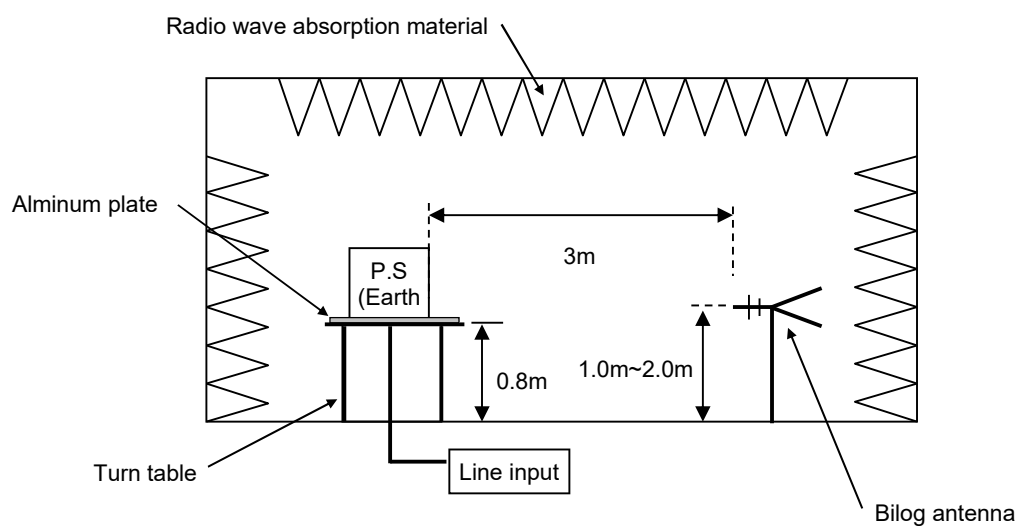

Conditions

Test : EMI
Model Name: WBA150B

○Photographs of Test Set-Up

1. LINE CONDUCTION



2. RADIATED EMISSION

