



DATA SHEET		Date	27-Jul-21
Model	WBA350B-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Natsuno

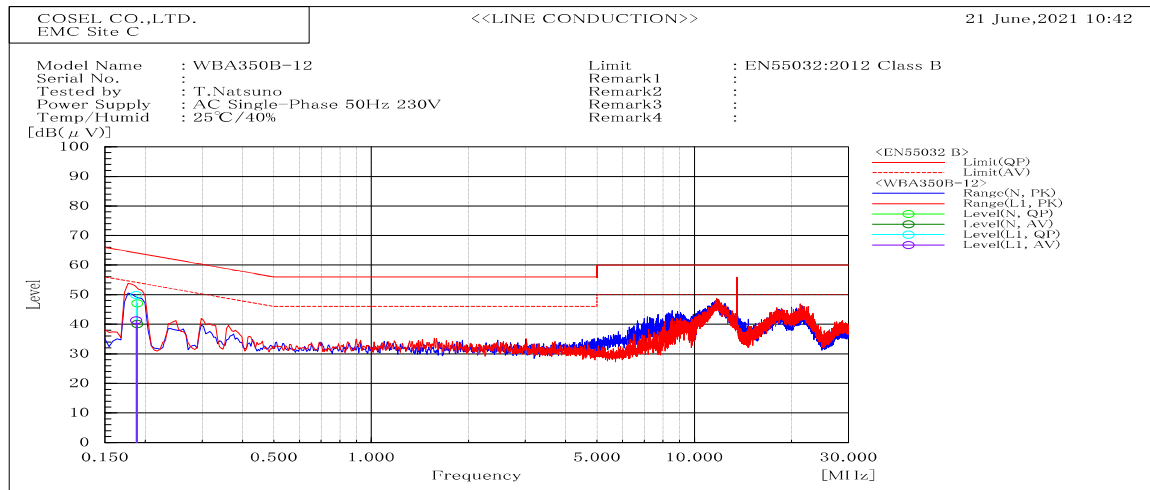


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.187	L1	49.9	41.4	64.2	54.2	14.3	12.8	Pass	
0.189	N	47.1	40.1	64.1	54.1	17	14	Pass	

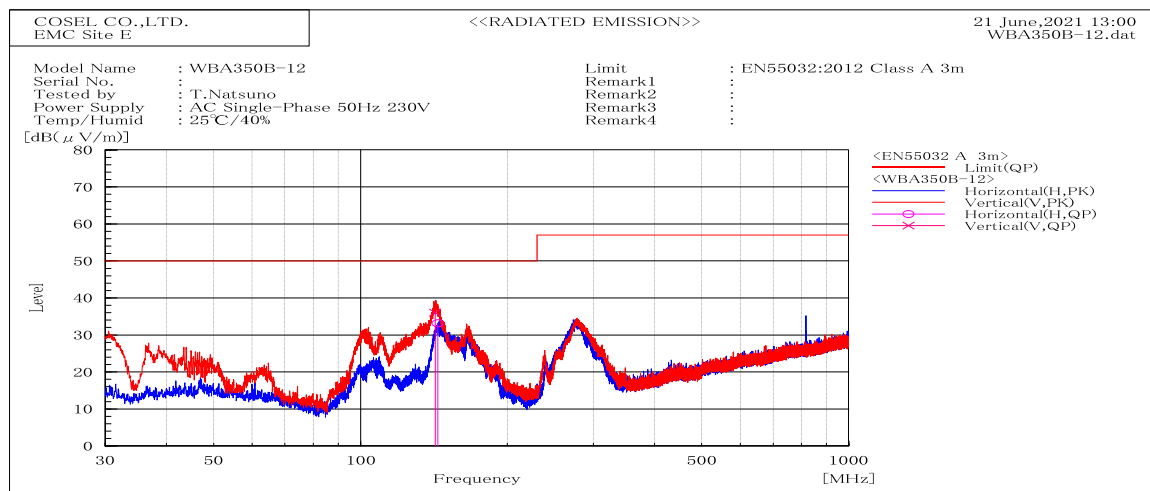


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
142.179	V	Stable	36	50	14	Pass	122.7	123.4	
143.916	H	Stable	33.1	50	16.9	Pass	200	36.8	

DATA SHEET		Date	27-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Natsuno

1. Line conduction

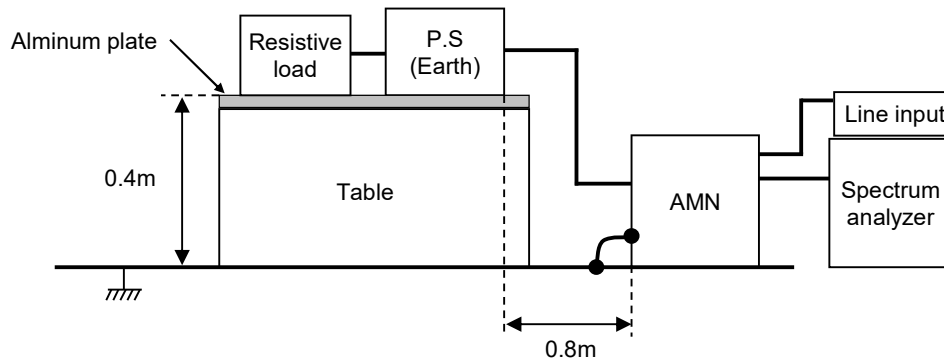

2. Radiated emission

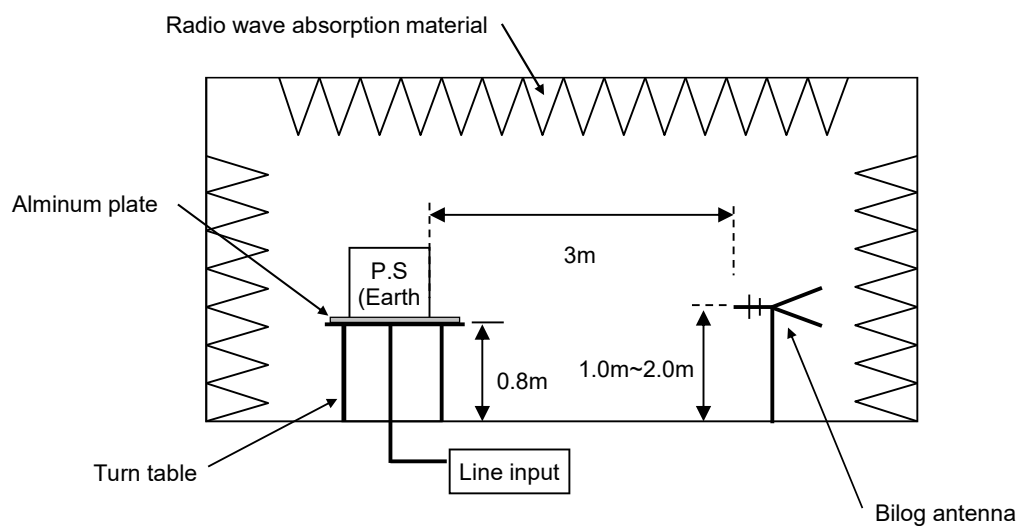

Conditions

Test : EMI
Model Name: WBA350B

○Photographs of Test Set-Up

1. LINE CONDUCTION



2. RADIATED EMISSION

