



## DATA SHEET

Model		WBA350B-24	Date	27-Jul-21
Test		EMI	Temp.	25 degreeC
		Line conduction & Radiated emission	Humid.	40 %RH
			Tested by	T.Natsuno

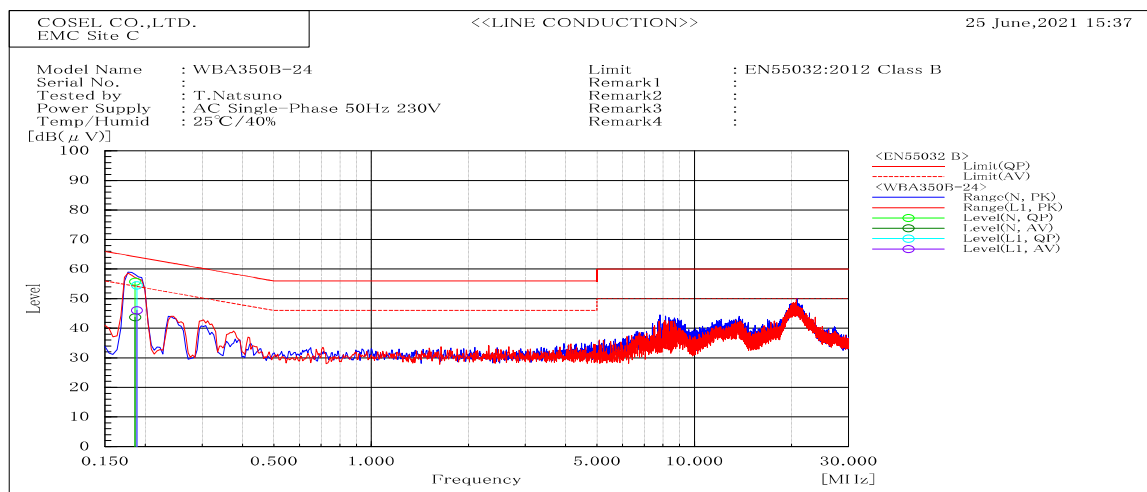


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.188	L1	54.5	46	64.1	54.1	9.6	8.1	Pass	
0.186	N	55.8	43.8	64.2	54.2	8.4	10.4	Pass	

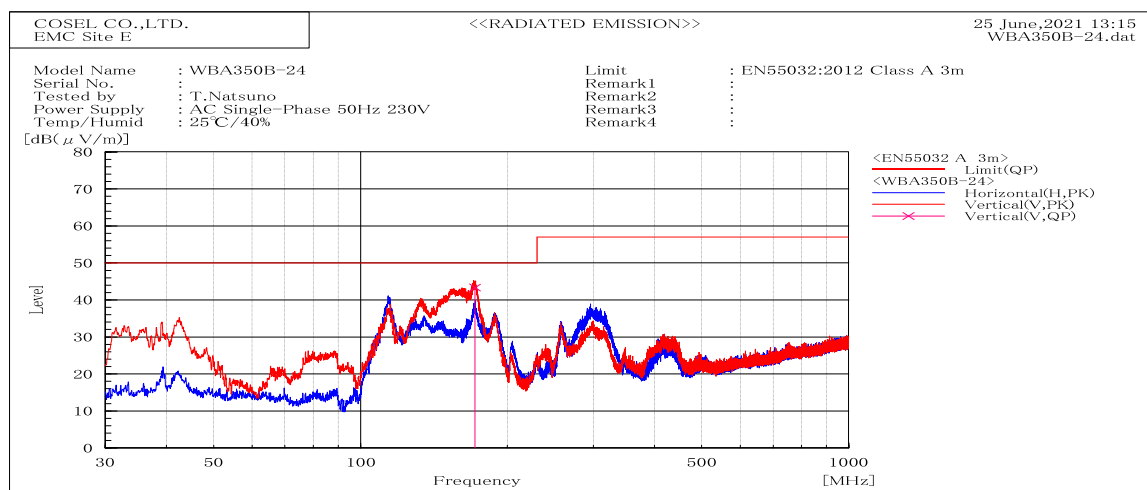


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
171.482	V	Stable	43.4	50	6.6	Pass	100.2	234.3	

DATA SHEET		Date	27-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Natsuno

## 1. Line conduction

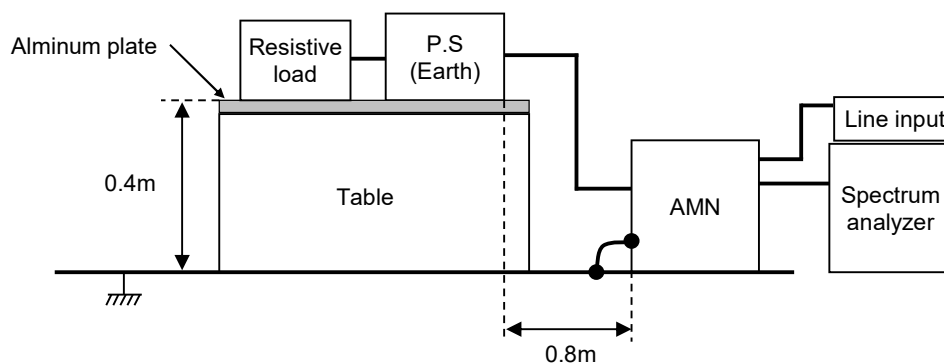

## 2. Radiated emission

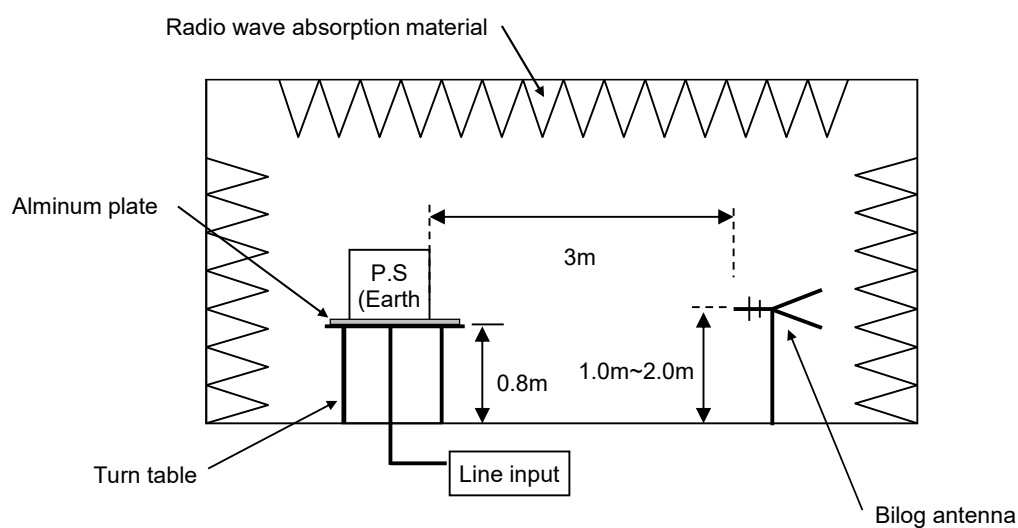


## Conditions

Test : EMI  
Model Name: WBA350B

## ○Photographs of Test Set-Up

### 1. LINE CONDUCTION

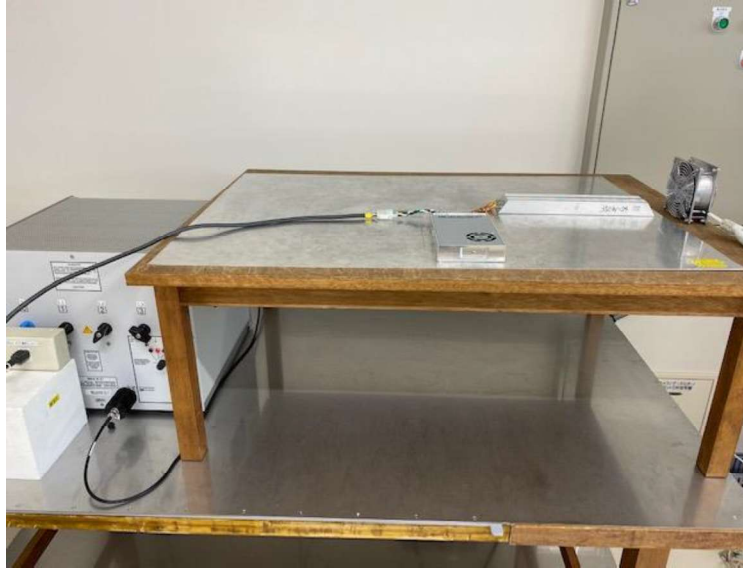

### 2. RADIATED EMISSION

