



DATA SHEET

Model		WBA350B-48	Date	27-Jul-21
Test		EMI	Temp.	25 degreeC
		Line conduction & Radiated emission	Humid.	40 %RH
			Tested by	T.Natsuno

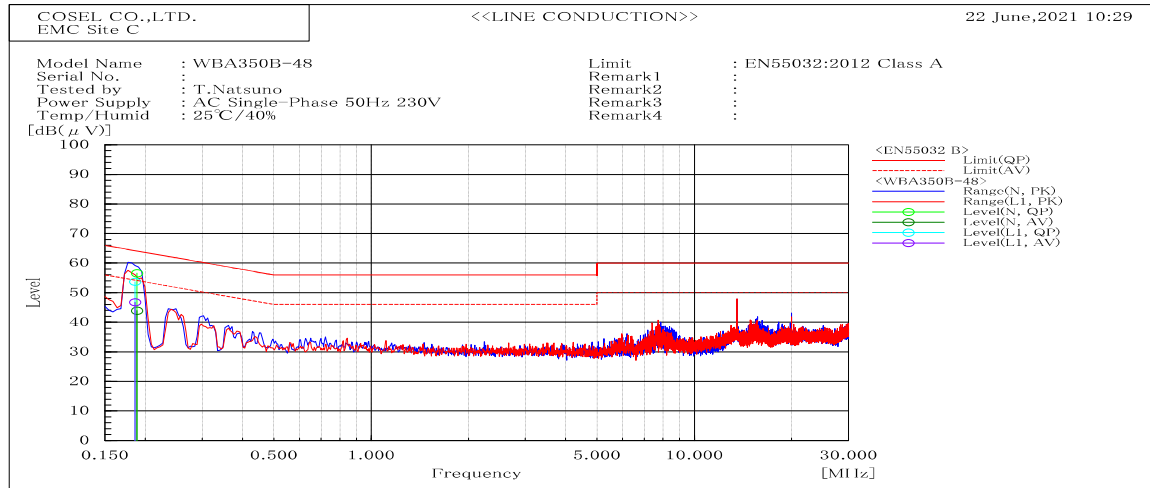


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.186	L1	53.7	46.8	64.2	54.2	10.5	7.4	Pass	
0.188	N	56.5	43.9	64.1	54.1	7.6	10.2	Pass	

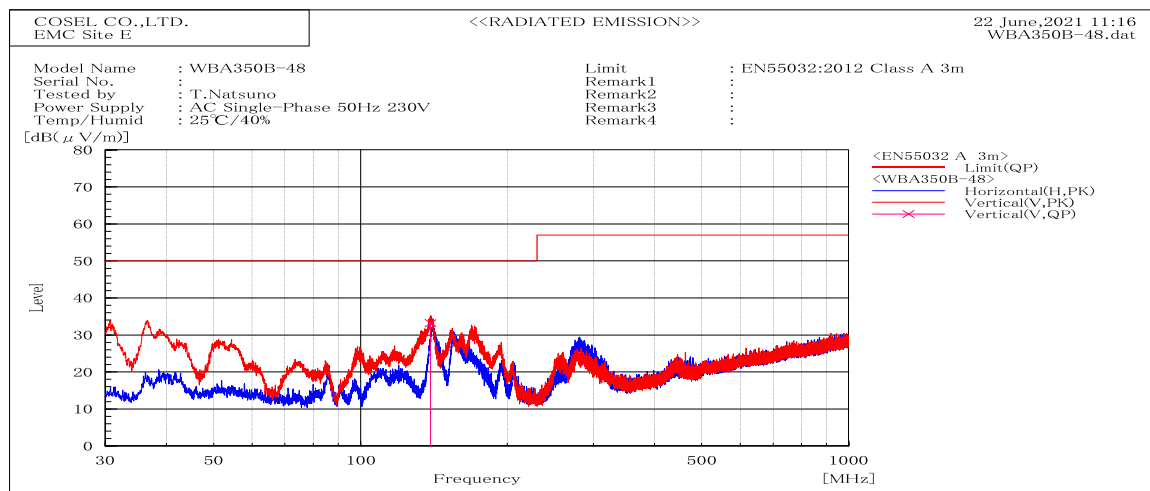


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
138.983	V	Stable	33.2	50	16.8	Pass	100.2	135.7	

DATA SHEET		Date	27-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Natsuno

1. Line conduction

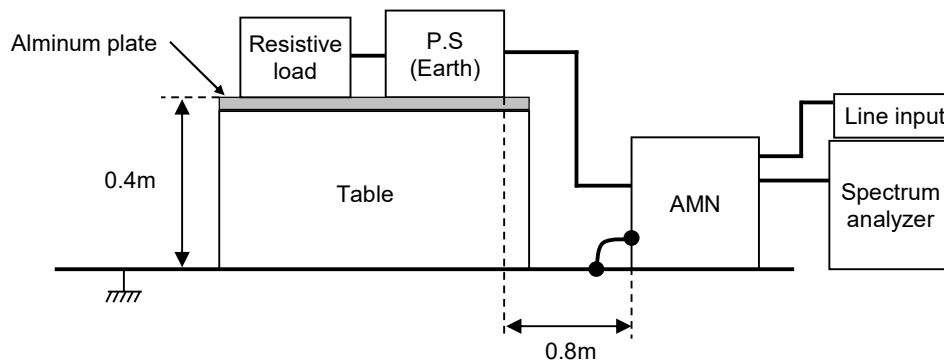

2. Radiated emission

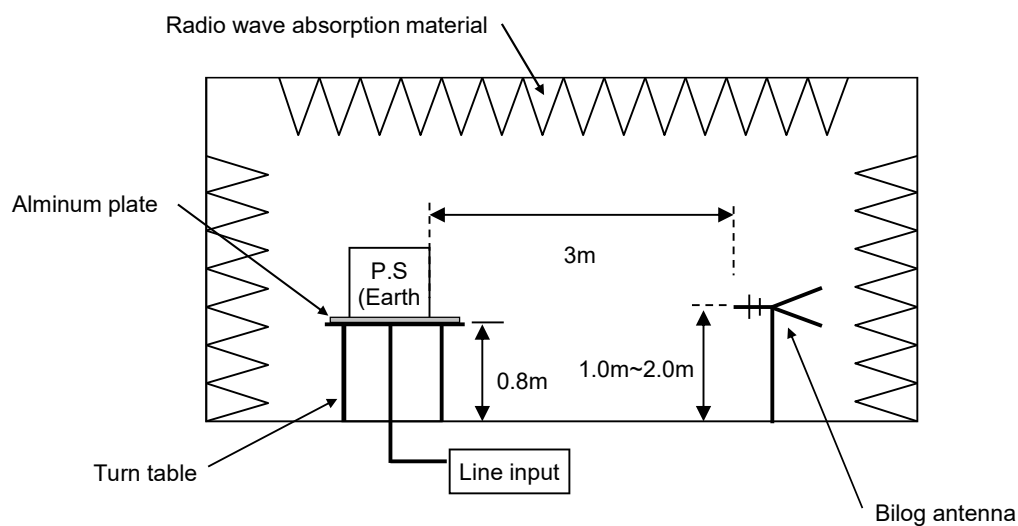


Conditions

Test : EMI
Model Name: WBA350B

○Photographs of Test Set-Up

1. LINE CONDUCTION

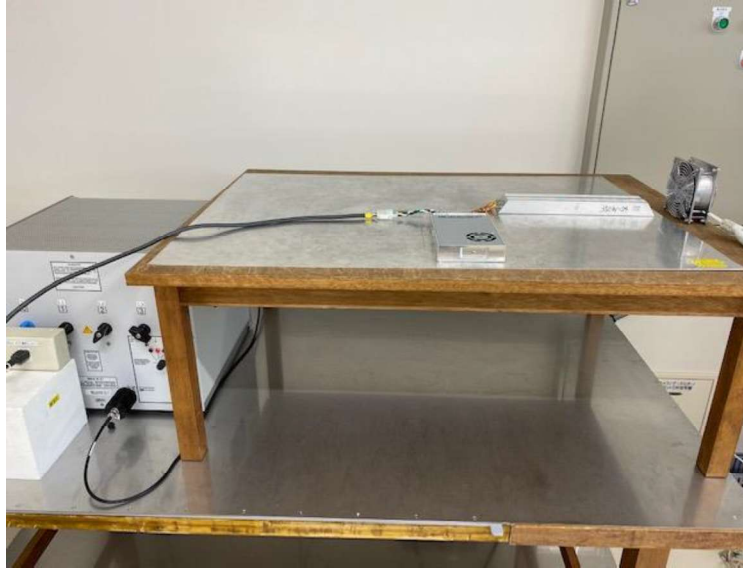

2. RADIATED EMISSION

