



DATA SHEET		Date	16-Jul-21
Model	WBA35B-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi T.Natsuno

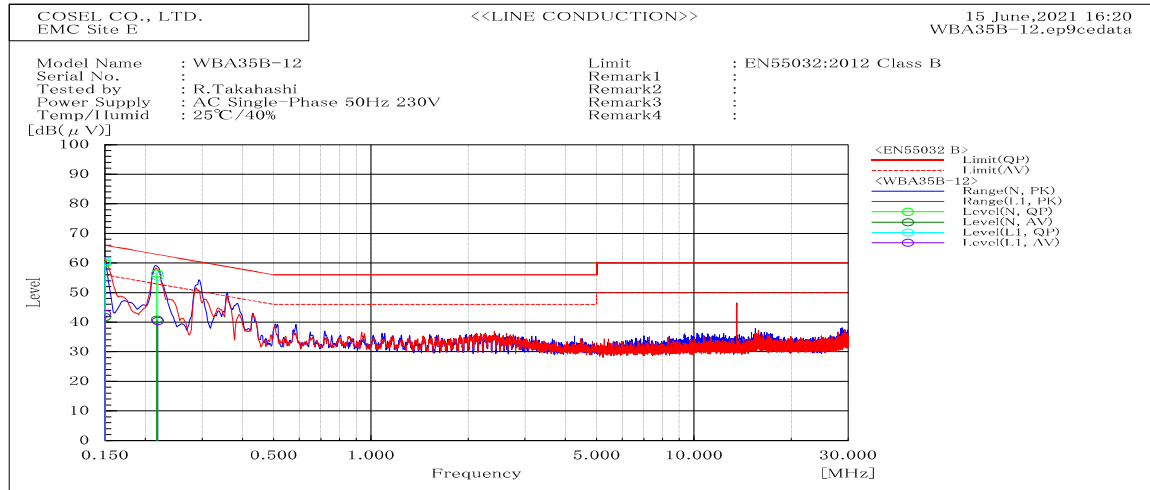


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.15	L1	60.5	42.8	66	56	5.5	13.2	Pass	
0.219	L1	55.4	40.4	62.9	52.9	7.5	12.5	Pass	
0.15	N	59.9	41.8	66	56	6.1	14.2	Pass	
0.217	N	56.5	40.8	62.9	52.9	6.4	12.1	Pass	

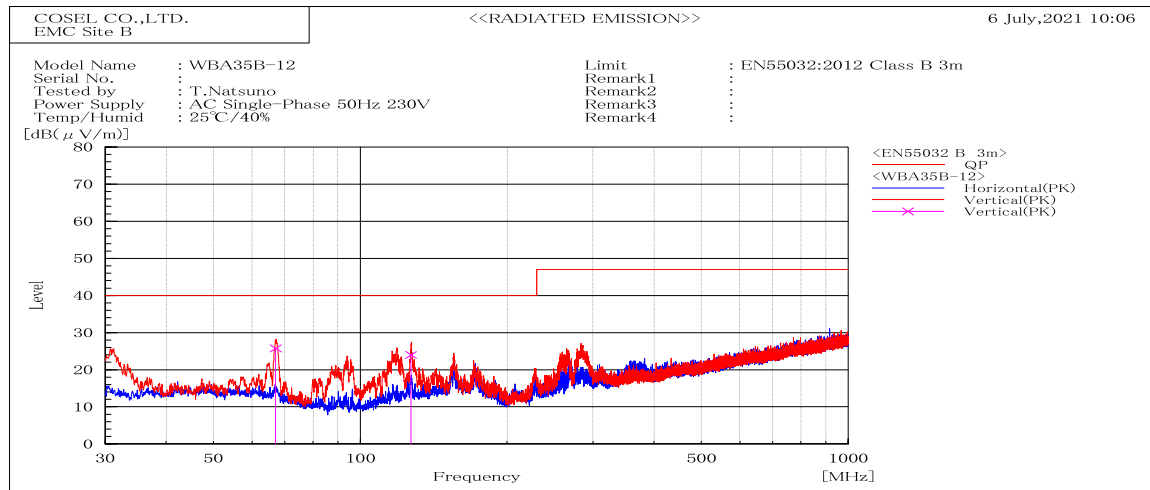


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m)	dB(μV/m)	dB				
67.055	V	Stable	25.8	40	14.2	Pass	100	37.6	
126.94	V	Stable	24	40	16	Pass	100	70.5	

DATA SHEET		Date	16-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi T.Natsuno

1. Line conduction

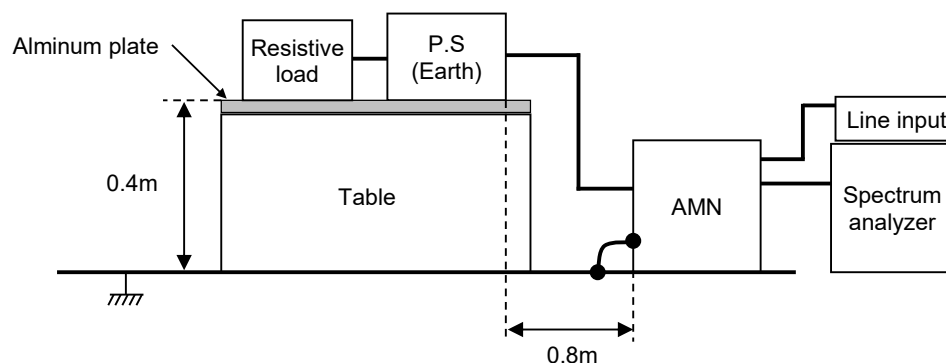

2. Radiated emission

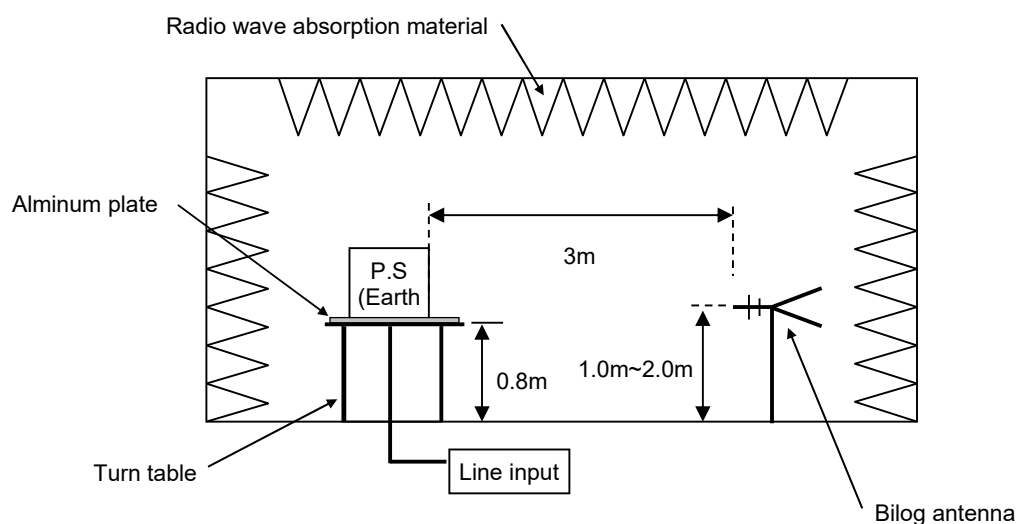


Conditions

Test : EMI
Model Name: WBA35B

○Photographs of Test Set-Up

1. LINE CONDUCTION

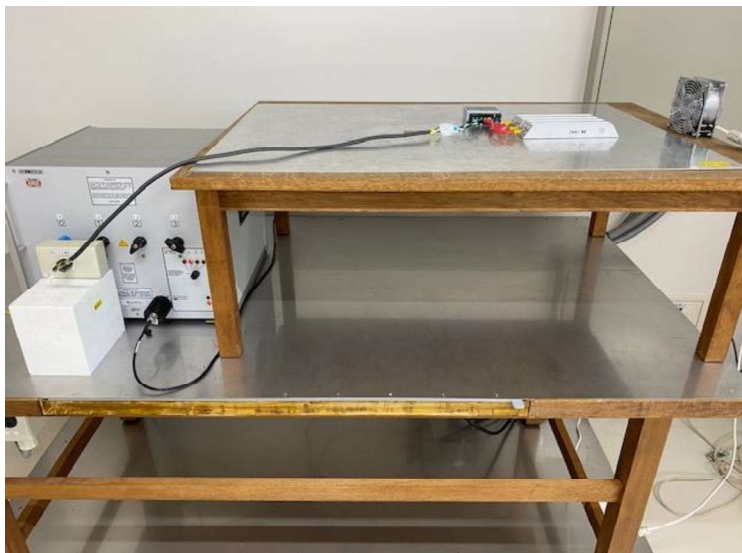

2. RADIATED EMISSION

