



DATA SHEET		Date	16-Jul-21
Model	WBA75B-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

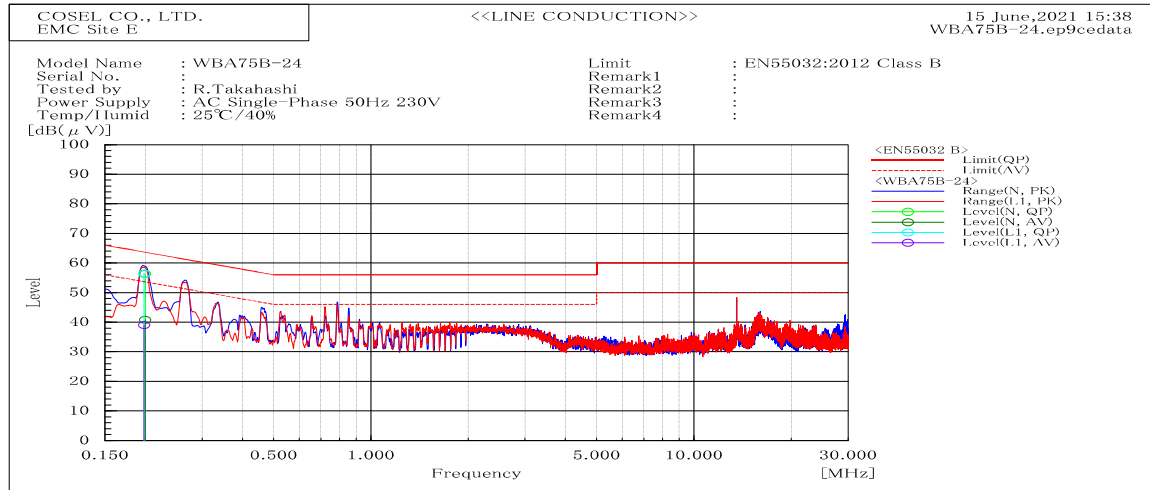


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	L1	56.4	39.1	63.7	53.7	7.3	14.6	Pass	
0.2	N	56.4	40.8	63.6	53.6	7.2	12.8	Pass	

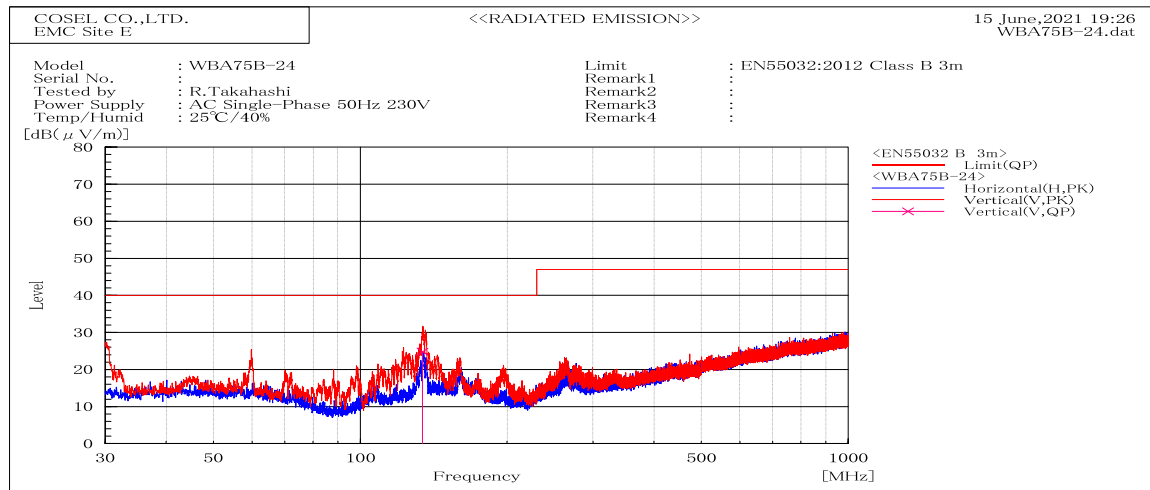


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
134.117	V	Stable	24.8	40	15.2	Pass	100.2	0	

DATA SHEET		Date	16-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Takahashi

1. Line conduction

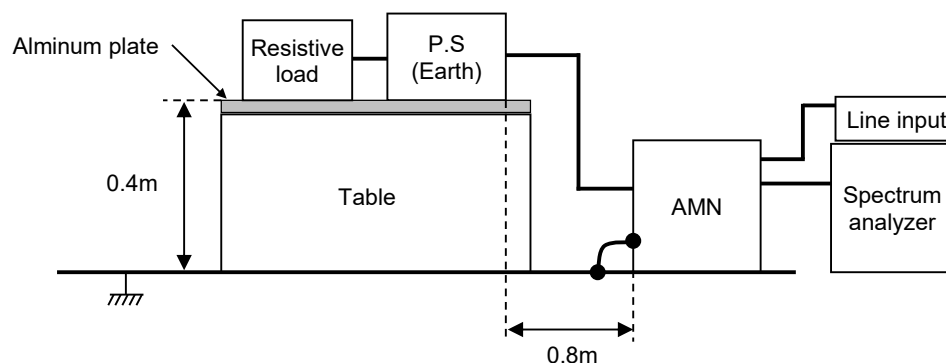

2. Radiated emission

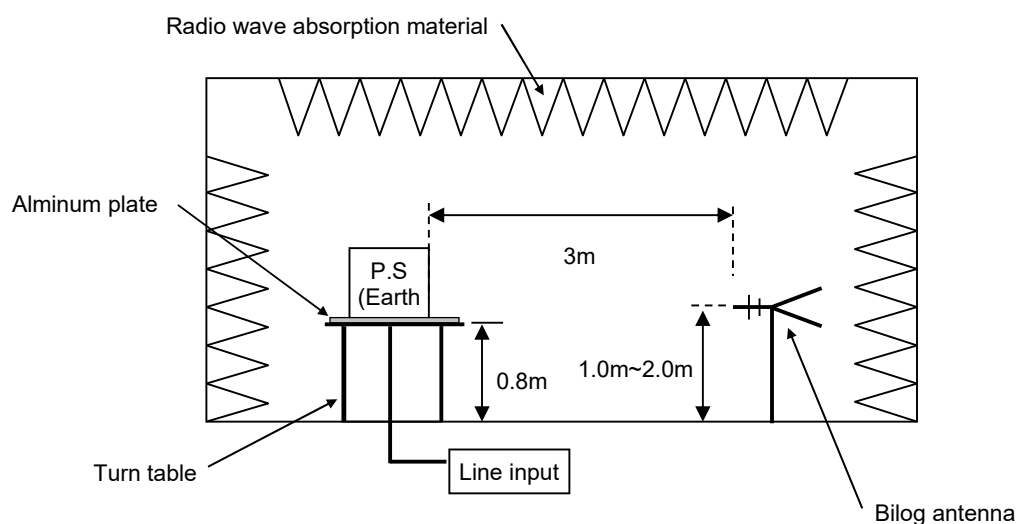


Conditions

Test : EMI
Model Name: WBA75B

○Photographs of Test Set-Up

1. LINE CONDUCTION

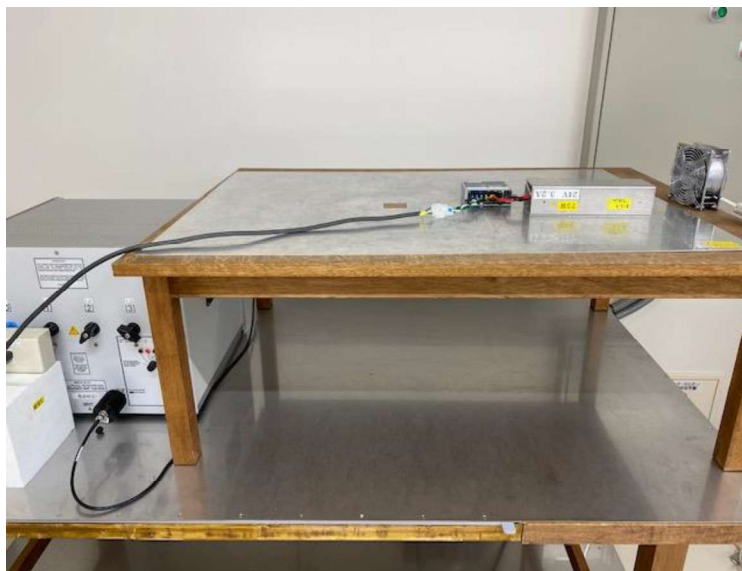

2. RADIATED EMISSION

