



DATA SHEET		Date	06-Sep-22
Model	WDA30F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

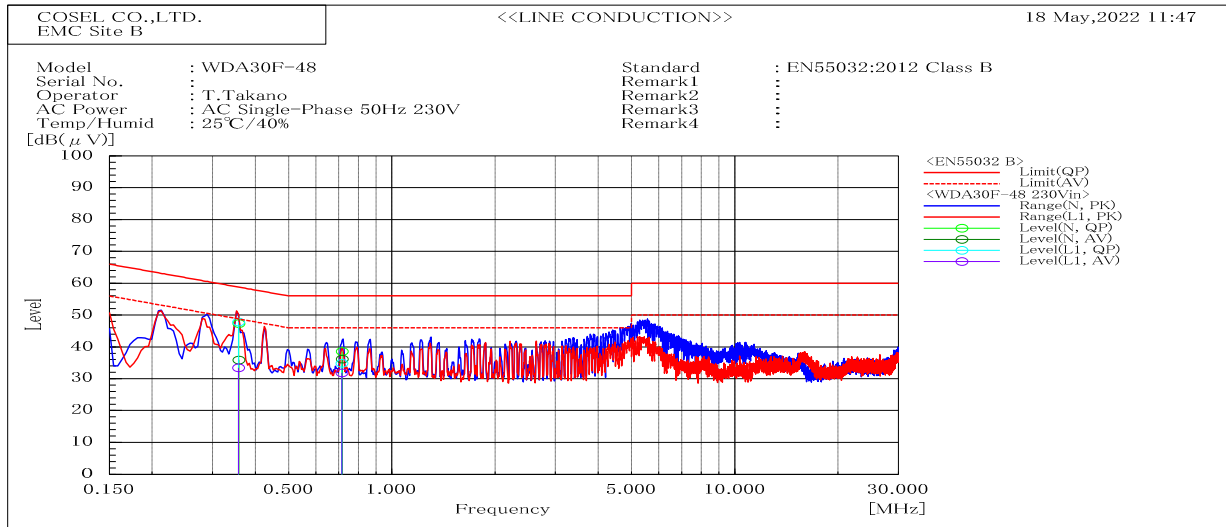


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.357	L1	47.8	33.4	58.8	48.8	11	15.4	Pass	
0.716	L1	34.8	31.8	56	46	21.2	14.2	Pass	
0.358	N	47.3	35.9	58.8	48.8	11.5	12.9	Pass	
0.717	N	38.6	36.1	56	46	17.4	9.9	Pass	

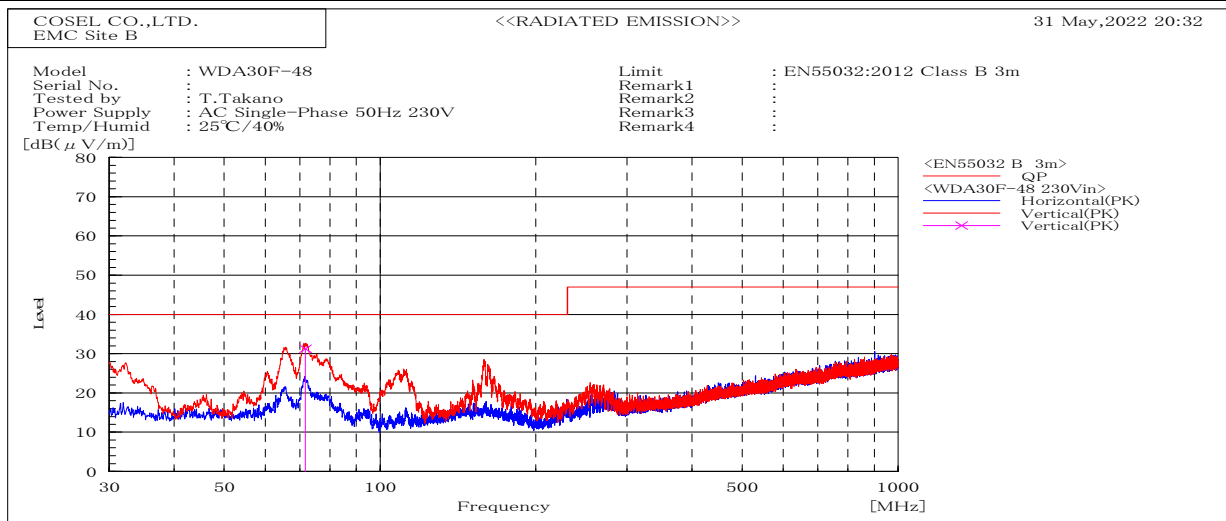

Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
71.748	V	Stable	31.2	40	40	8.8	Pass	100.2	302.6	

DATA SHEET		Date	06-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

1. Line conduction

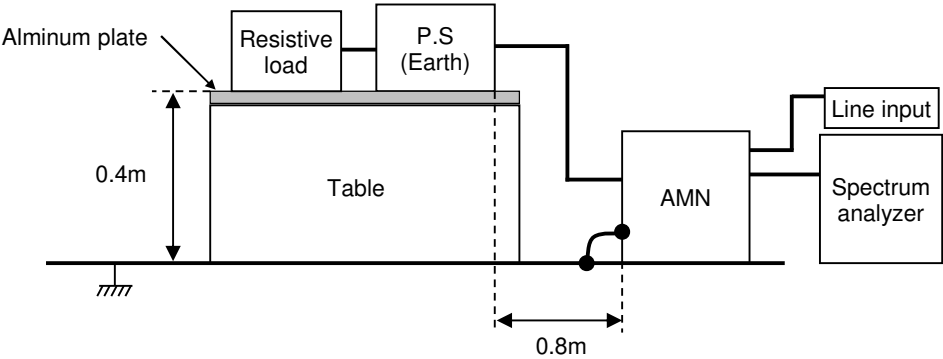

2. Radiated emission

