

DATA SHEET		Date	06-Sep-22
Model	WDA60F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano


COSEL CO.,LTD.
EMC Site B

<<LINE CONDUCTION>>

3 June,2022 14:35

Model Name : WDA60F-12
Serial No. :
Tested by : T.Takano
Power Supply : AC Single-Phase 50Hz 230V
Temp/Humid : 25°C/40%

Limit : EN55032:2012 Class B
Remark1 :
Remark2 :
Remark3 :
Remark4 :

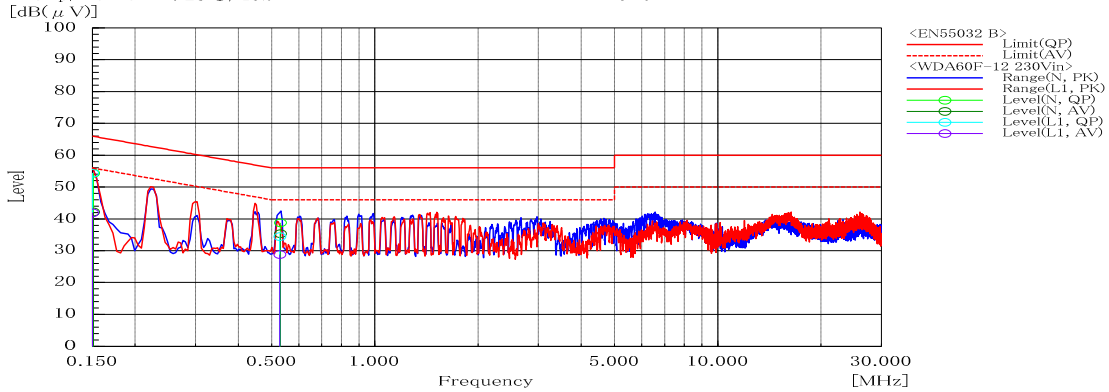

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.53	N	38.8	35.4	56	46	17.2	10.6	Pass	
0.151	N	54.4	42.2	65.9	55.9	11.5	13.7	Pass	
0.528	L1	34.4	28.8	56	46	21.6	17.2	Pass	
0.15	L1	54.4	41.9	66	56	11.6	14.1	Pass	


COSEL CO.,LTD.
EMC Site B

<<RADIATED EMISSION>>

31 May,2022 17:18

Model : WDA60F-12
Serial No. :
Tested by : T.Takano
Power Supply : AC Single-Phase 50Hz 230V
Temp/Humid : 25°C/40%


Limit : EN55032:2012 Class B 3m
Remark1 :
Remark2 :
Remark3 :
Remark4 :

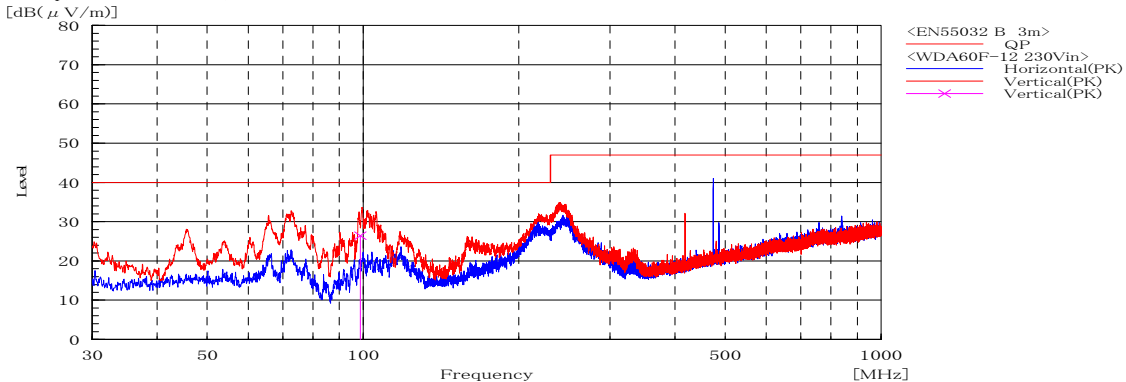

Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
98.77	V	Stable	26.5	40	40	13.5	Pass	115.5	0	

DATA SHEET		Date	06-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

1. Line conduction

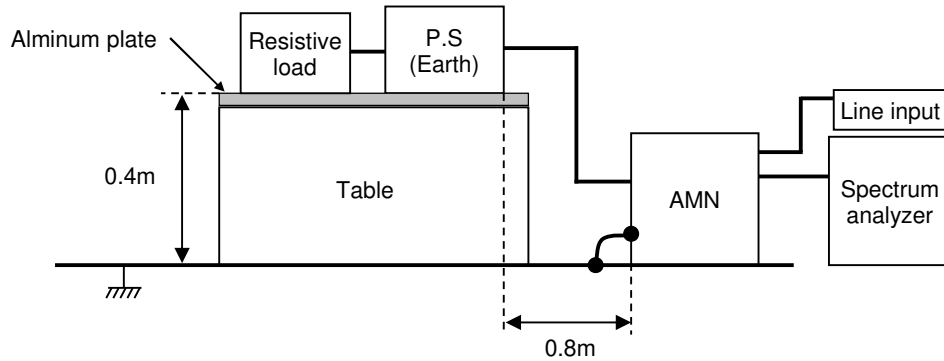

2. Radiated emission

