



DATA SHEET		Date	06-Sep-22
Model	WDA60F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

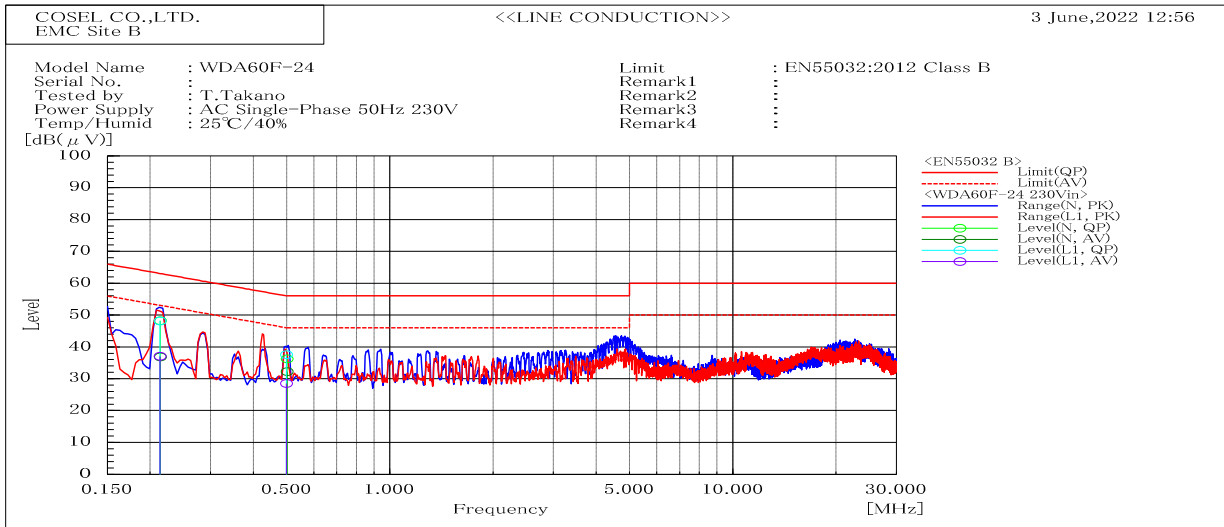


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.214	L1	48.2	37.1	63.1	53.1	14.9	16	Pass	
0.499	L1	37.6	28.5	56	46	18.4	17.5	Pass	
0.214	N	48.2	36.9	63	53	14.8	16.1	Pass	
0.502	N	36.2	32.3	56	46	19.8	13.7	Pass	

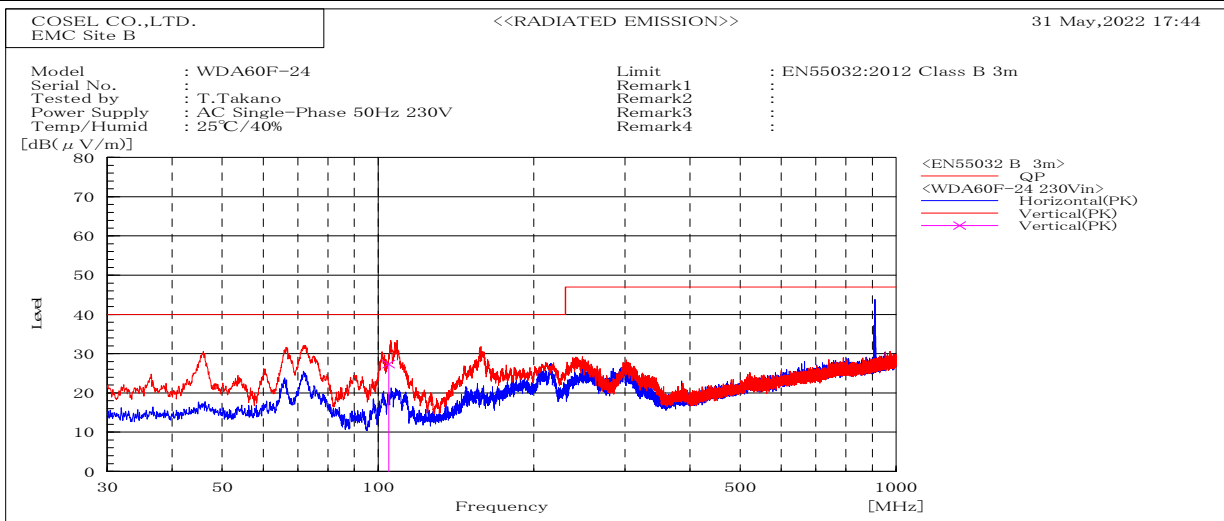

Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
104.843	V	Stable	27.3	20.3	40	12.7	Pass	105.4	30.6	

DATA SHEET		Date	06-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

1. Line conduction

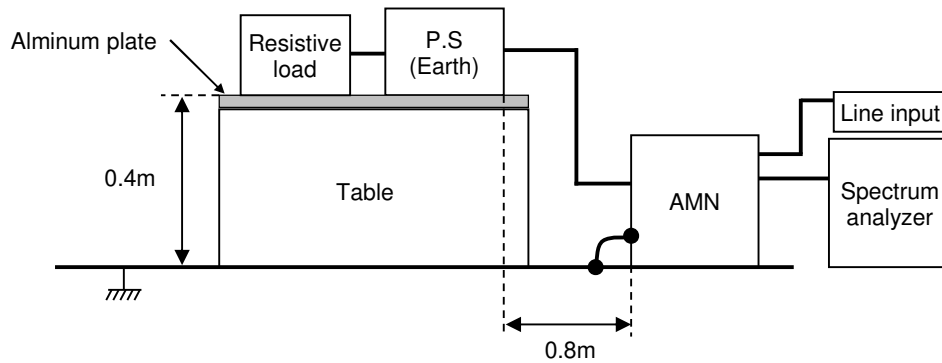

2. Radiated emission

