



DATA SHEET		Date	06-Sep-22
Model	WDA90F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

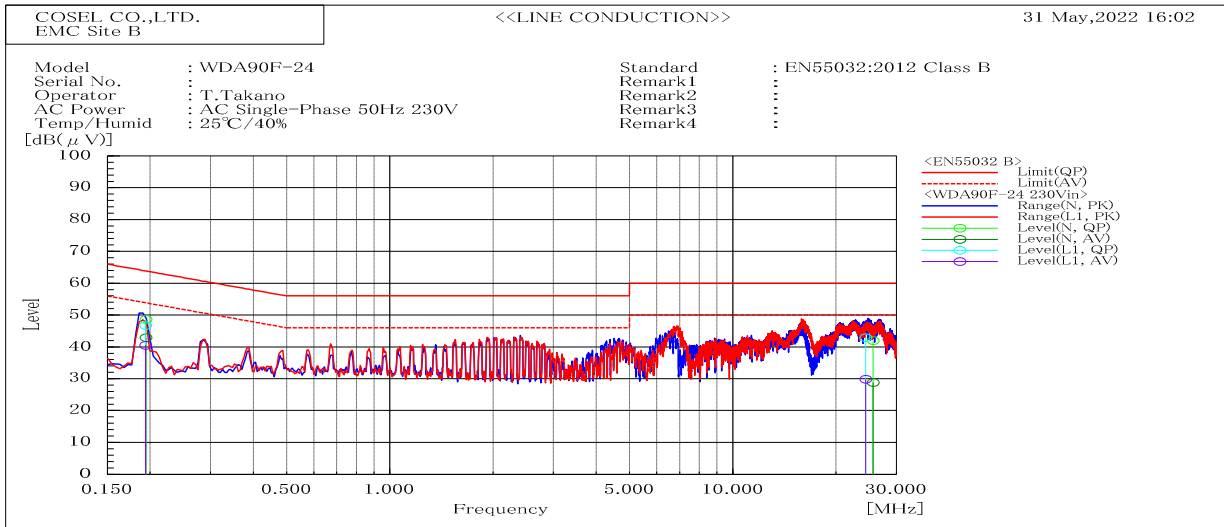


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.194	L1	46.8	40.5	63.9	53.9	17.1	13.4	Pass	
24.419	L1	42.9	29.8	60	50	17.1	20.2	Pass	
0.194	N	48.6	42.9	63.8	53.8	15.2	10.9	Pass	
25.685	N	42	28.8	60	50	18	21.2	Pass	

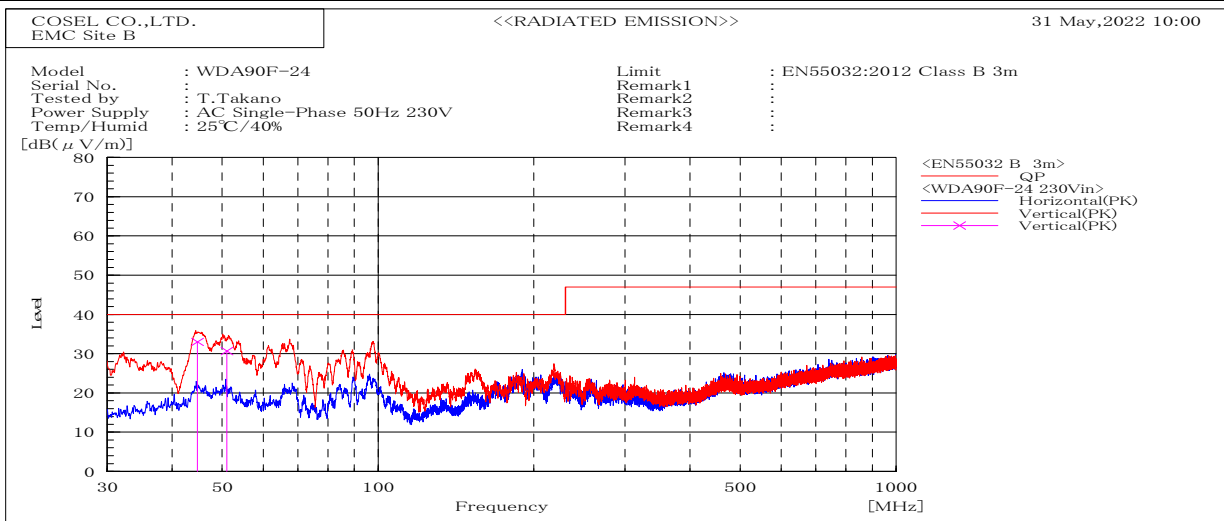

Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
44.786	V	Stable	33	40	7	Pass	100	313.5	
51.074	V	Stable	30.7	40	9.3	Pass	100.2	331.7	

DATA SHEET		Date	06-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Takano

### 1. Line conduction

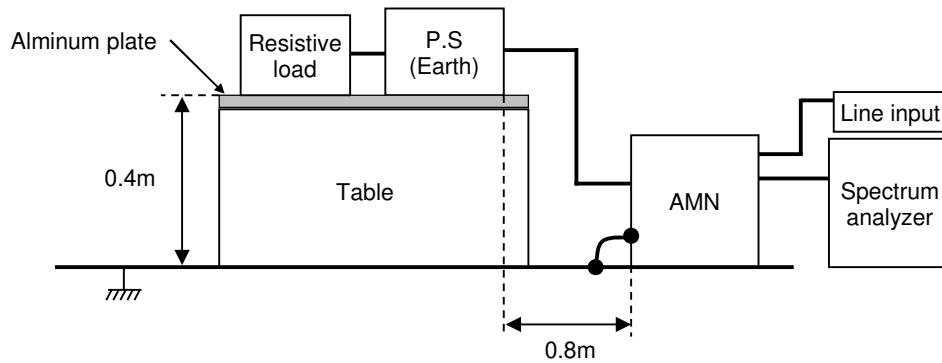

### 2. Radiated emission

