



DATA SHEET			Date	29-Nov-23
Model	WMA100F-12		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	45 %RH
			Tested by	K.Kurata

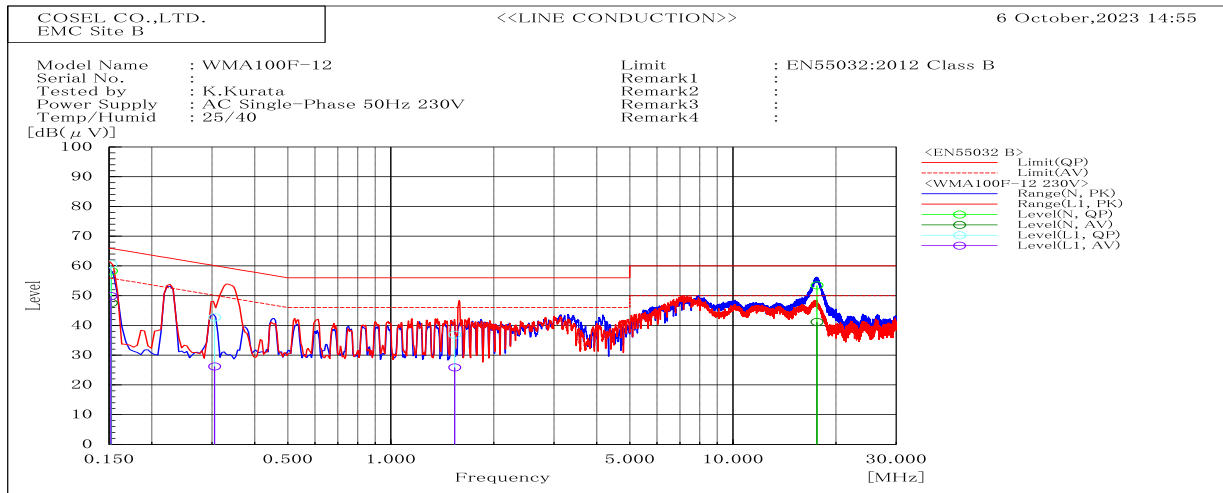


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.152	L1	60.6	49.9	65.9	55.9	5.3	6	Pass	
0.305	L1	42.7	26.2	60.1	50.1	17.4	23.9	Pass	
1.537	L1	36.9	25.9	56	46	19.1	20.1	Pass	
0.152	N	58.3	47.6	65.9	55.9	7.6	8.3	Pass	
17.603	N	53.5	41.2	60	50	6.5	8.8	Pass	

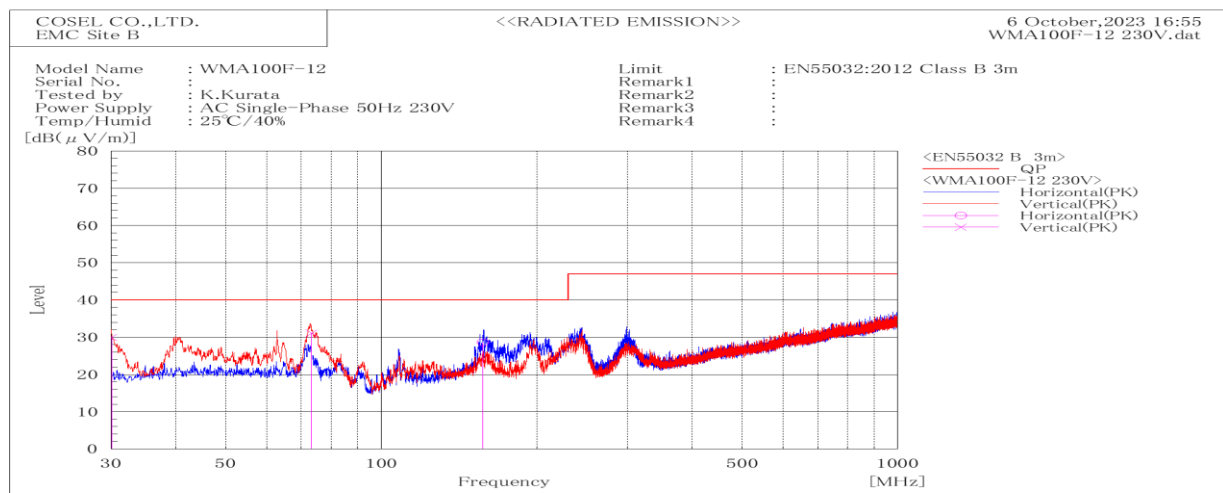


Frequency MHz	Polarization	Stability	Level		Limit		Margin	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV	QP	AV					
30.044	V	Stable	29.9		40		10.1	Pass	100	335	
73.213	V	Stable	31		40		9	Pass	100.2	283	
157.378	H	Stable	28.6		40		11.4	Pass	190	171	

DATA SHEET		Date	29-Nov-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	K.Kurata

1. Line conduction

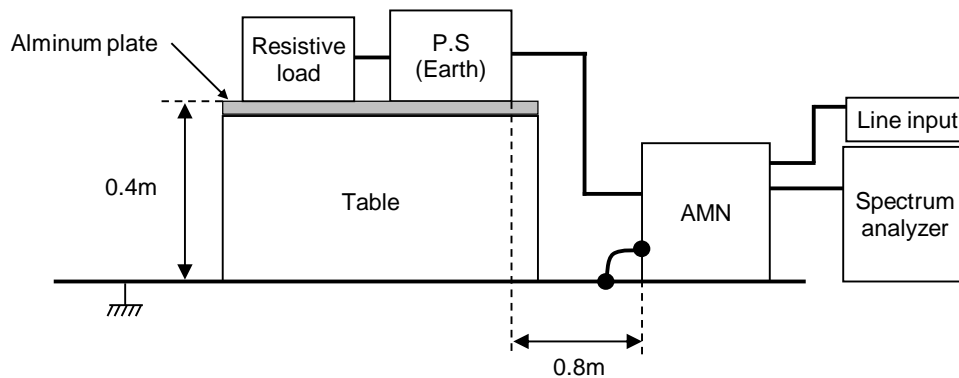


2. Radiated emission

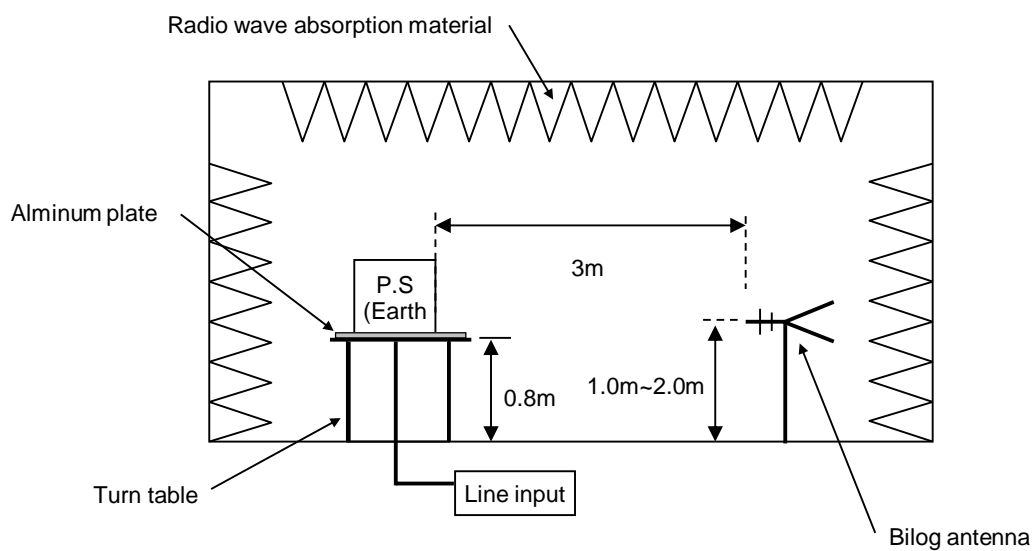

Conditions

Test : EMI
Model Name : WMA100F-12

○Photographs of Test Set-Up

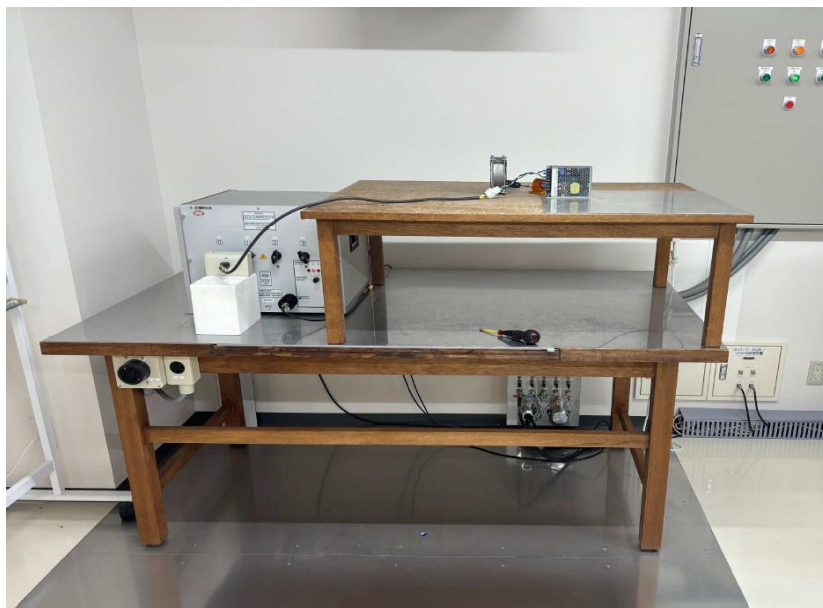1. LINE CONDUCTION**2. RADIATED EMISSION**