



DATA SHEET		Date	29-Nov-23
Model	WMA100F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	K.Kurata

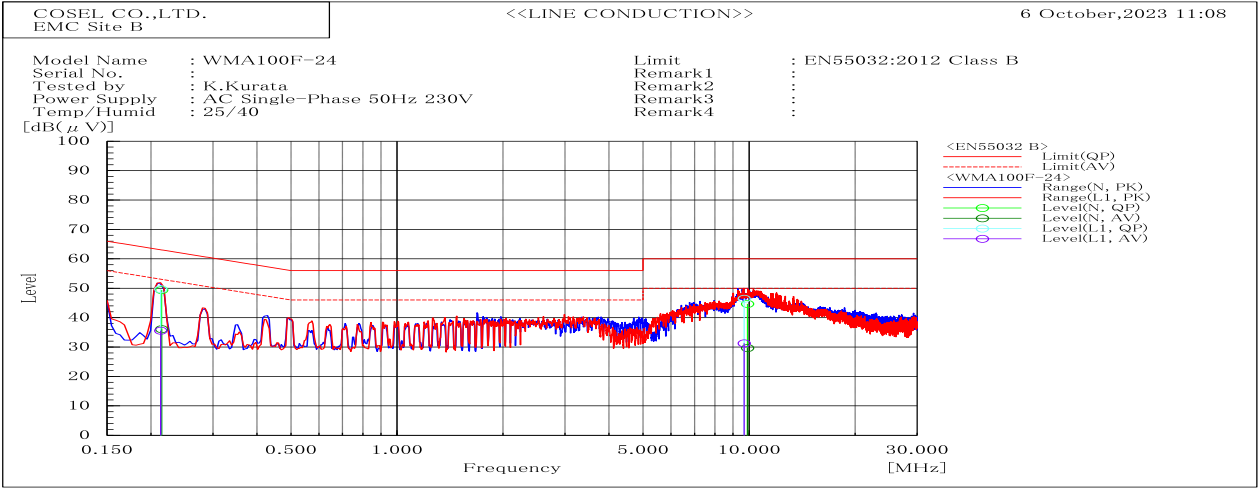


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.213	L1	49.7	35.6	63.1	53.1	13.4	17.5	Pass	
9.683	L1	46.4	31.3	60	50	13.6	18.7	Pass	
0.214	N	49.4	36.1	63	53	13.6	16.9	Pass	
9.901	N	44.7	29.6	60	50	15.3	20.4	Pass	

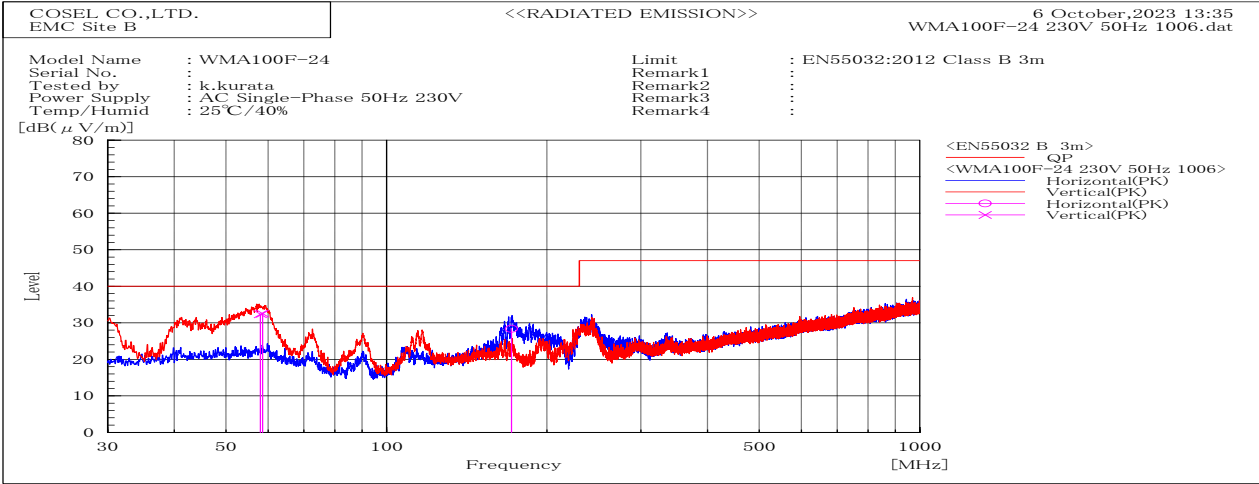


Frequenc y MHz	Polarizatio n	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
58.012	V	Stable	32.4	40	7.6	Pass	100.2	331	
171.474	H	Stable	28.4	40	11.6	Pass	184	0	
58.583	V	Stable	32.5	40	7.5	Pass	100.2	247	

DATA SHEET		Date	29-Nov-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	K.Kurata

1. Line conduction

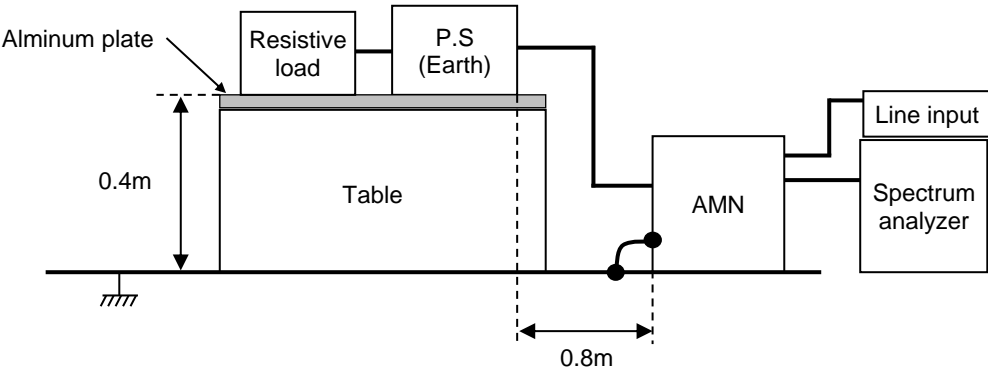

2. Radiated emission

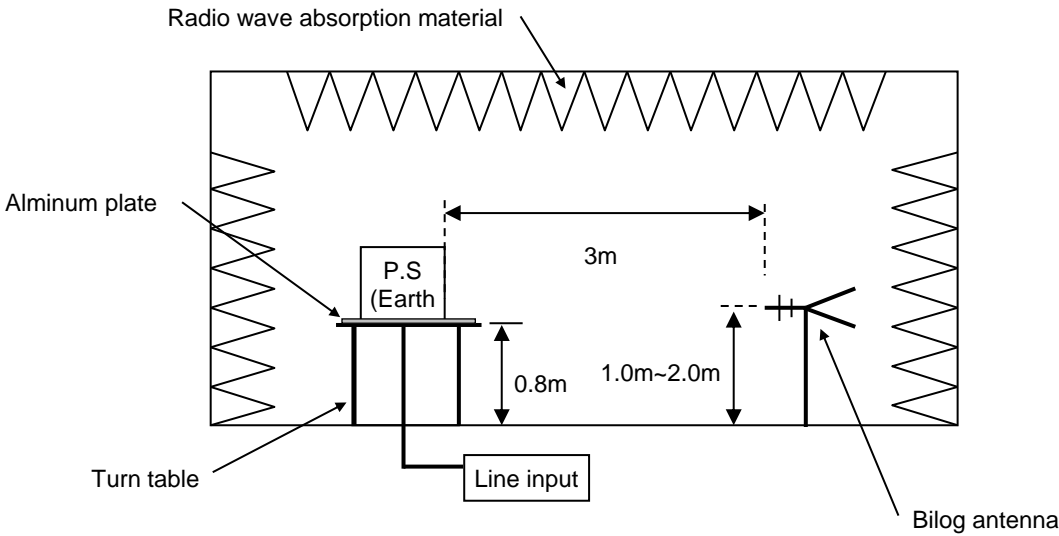


Conditions

Test : EMI
Model Name: WMA100F-24

Photographs of Test Set-Up

1. LINE CONDUCTION

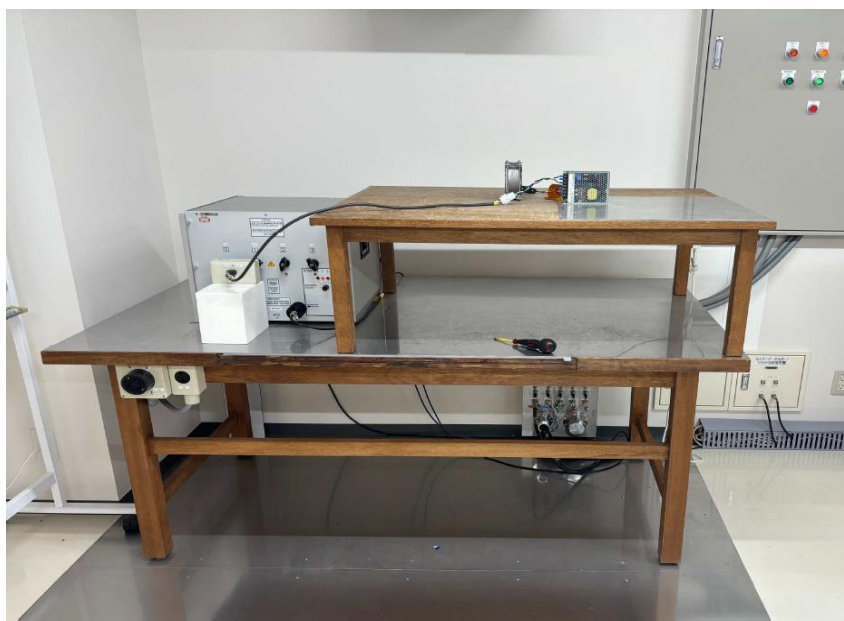

2. RADIATED EMISSION

