



DATA SHEET		Date	30-Nov-23
Model	WMA100F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	K.Kurata

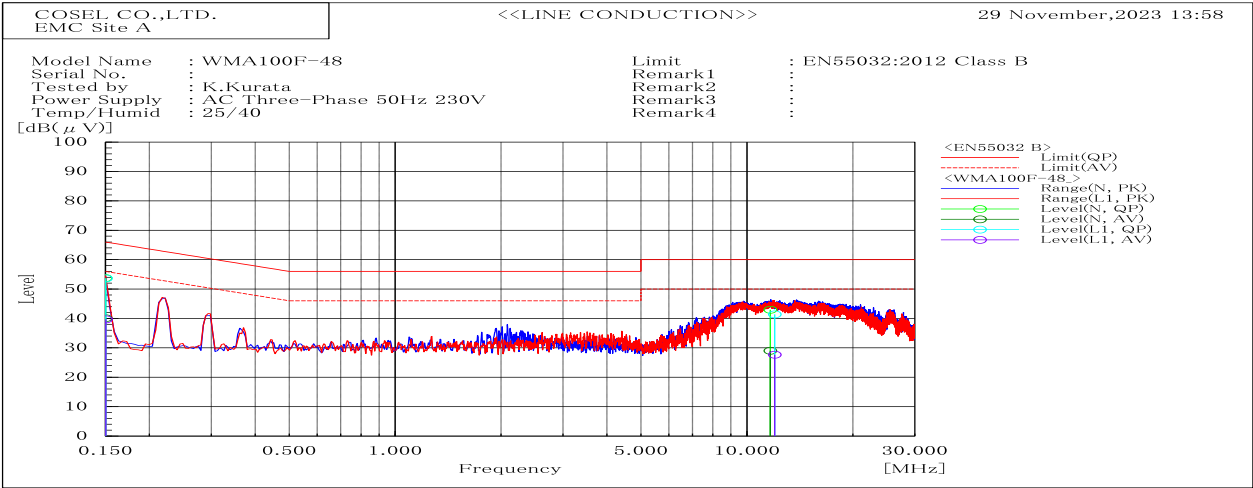


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.15	L1	53.7	39.7	66	56	12.3	16.3	Pass	
11.991	L1	41.4	27.7	60	50	18.6	22.3	Pass	
0.15	N	53.8	40.1	66	56	12.2	15.9	Pass	
11.646	N	42.9	29	60	50	17.1	21	Pass	

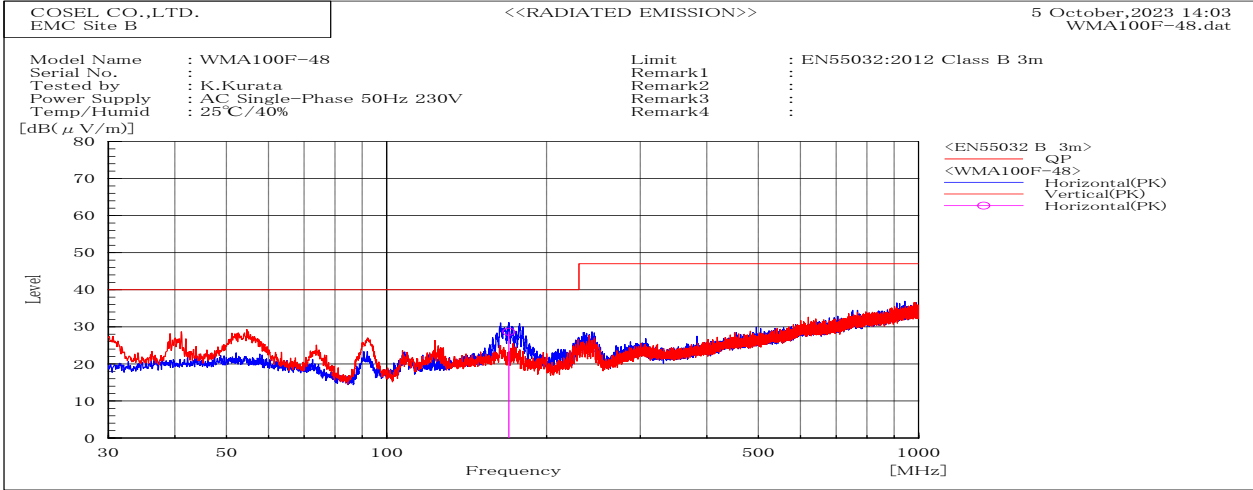


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
169.75	H	Stable	28.6	40	11.4	Pass	186.1	335	

DATA SHEET		Date	30-Nov-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	K.Kurata

1. Line conduction

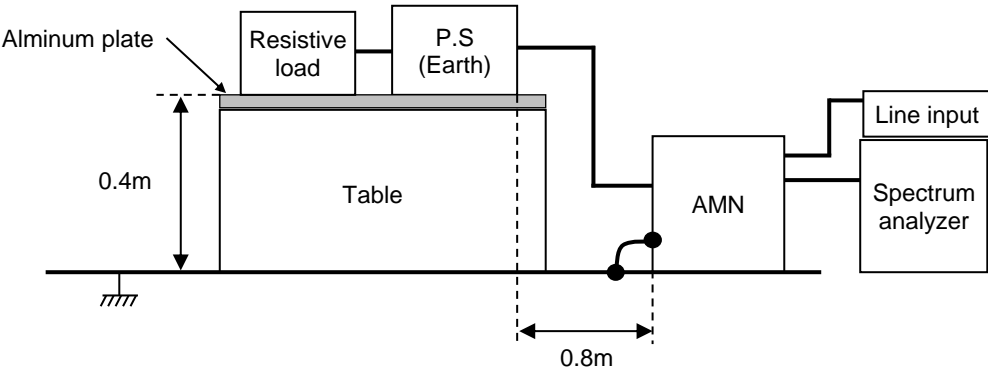

2. Radiated emission

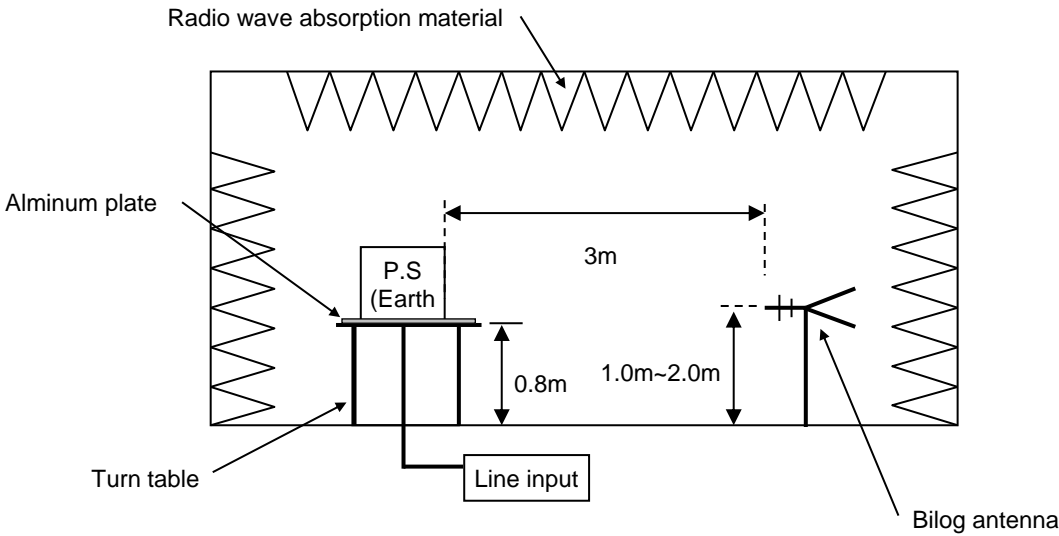


Conditions

Test : EMI
Model Name: WMA100F-48

Photographs of Test Set-Up

1. LINE CONDUCTION

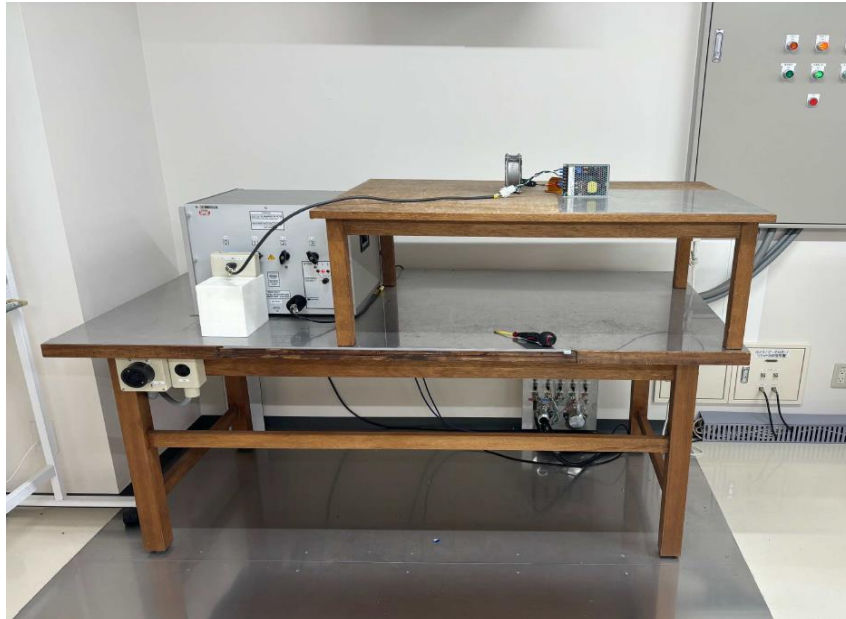

2. RADIATED EMISSION

