



DATA SHEET		Date	28-Nov-19
Model	WMA150H-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

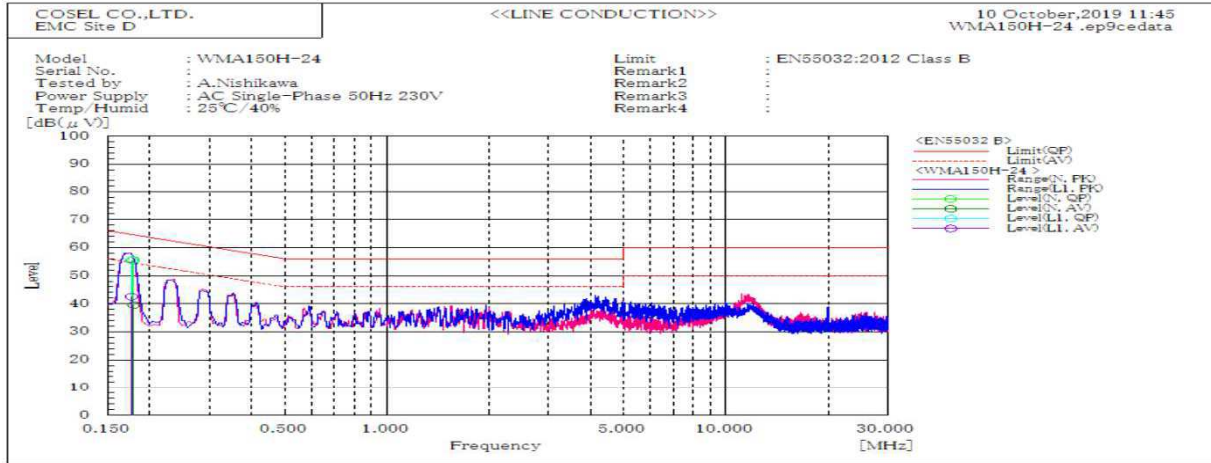


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.177	L1	55.5	42.5	64.6	54.6	9.1	12.1	Pass	
0.179	N	55.6	39.6	64.5	54.5	8.9	14.9	Pass	

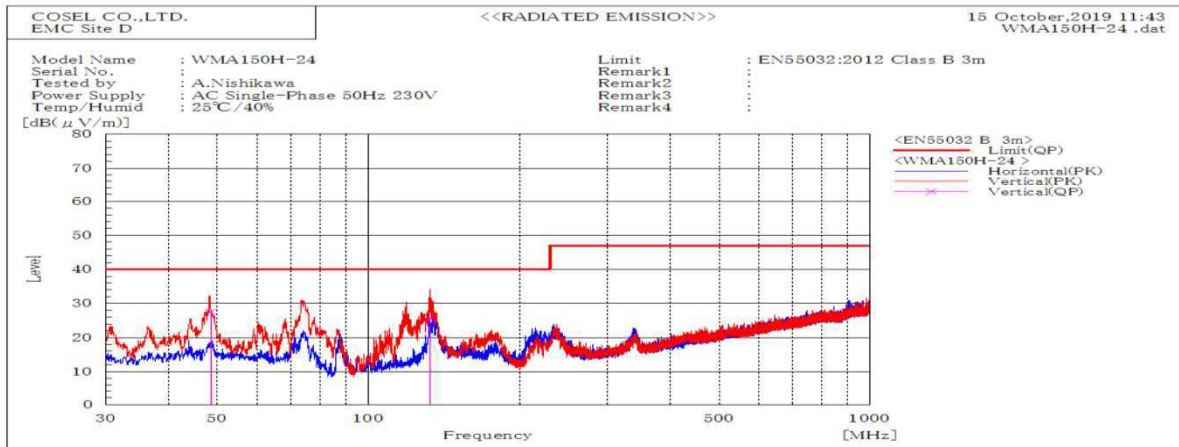


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
48.608	V	Stable	27.5	40	12.5	Pass	100	354.9	
132.907	V	Stable	25.6	40	14.4	Pass	105.5	133.2	

DATA SHEET		Date	28-Nov-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

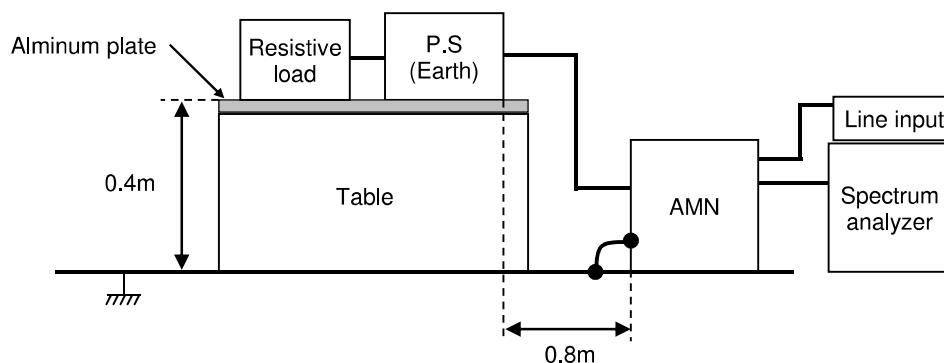

2. Radiated emission

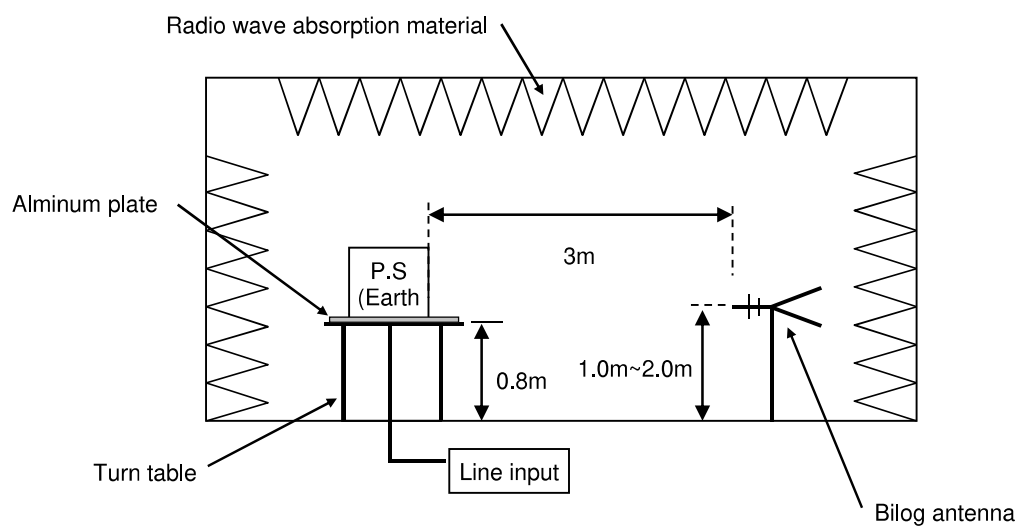

Conditions

Test : EMI
Model Name: WMA150H-24

Photographs of Test Set-Up

1. LINE CONDUCTION



2. RADIATED EMISSION

