



DATA SHEET		Date	25-Nov-19
Model	WMA350H-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

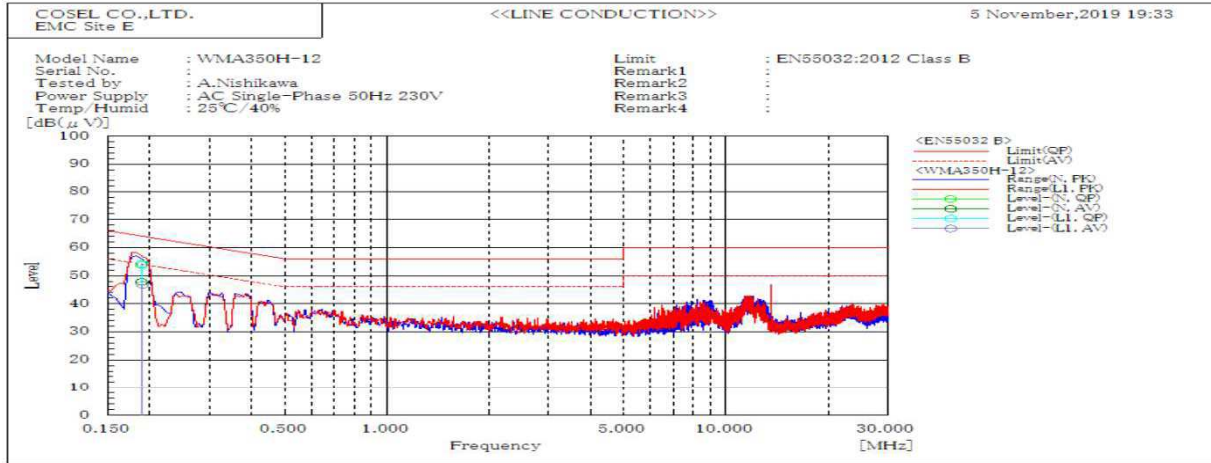


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.19	L1	54.4	46.8	64	54	9.6	7.2	Pass	
0.189	N	53.9	47.8	64.1	54.1	10.2	6.3	Pass	

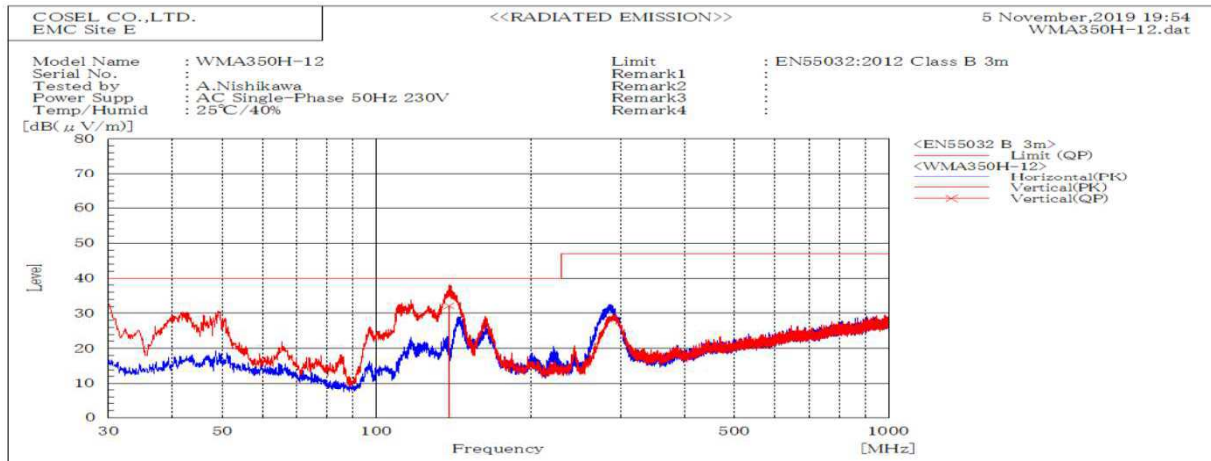


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
138.582	V	Stable	32.2	40	7.8	Pass	101.8	0	

DATA SHEET		Date	25-Nov-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

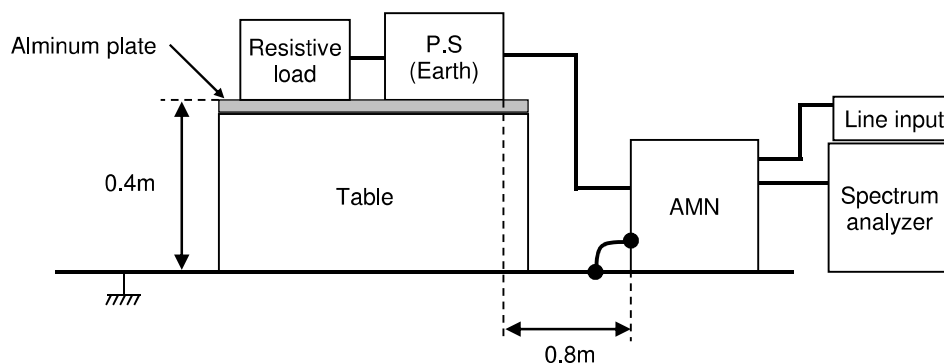

2. Radiated emission

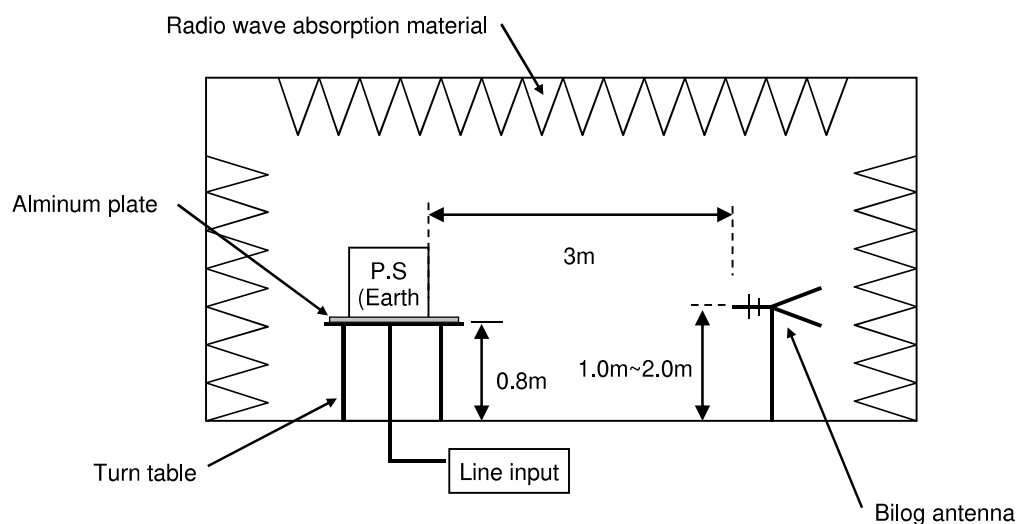


Conditions

Test : EMI
Model Name: WMA350H-12

Photographs of Test Set-Up

1. LINE CONDUCTION

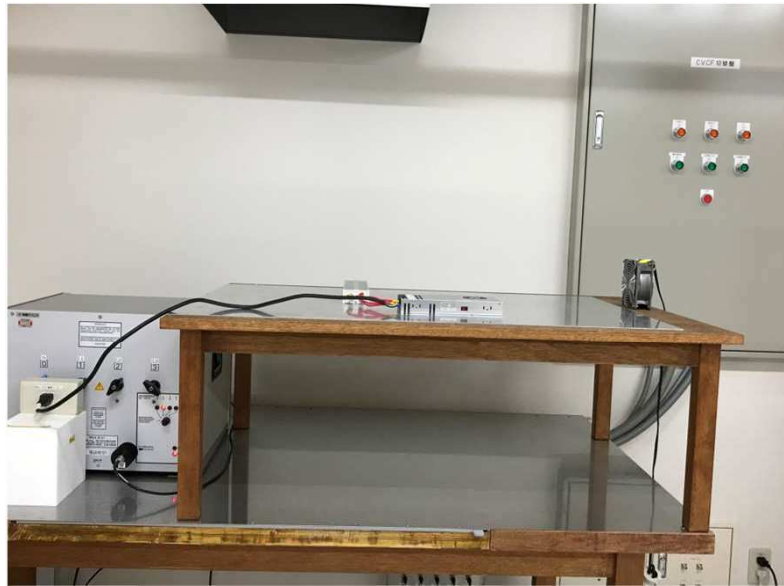

2. RADIATED EMISSION

