



## DATA SHEET

Model	WMA350H-36	Date	29-Jul-21
Test	EMI Line conduction & Radiated emission	Temp.	25 degreeC
		Humid.	40 %RH
		Tested by	T.Natsuno

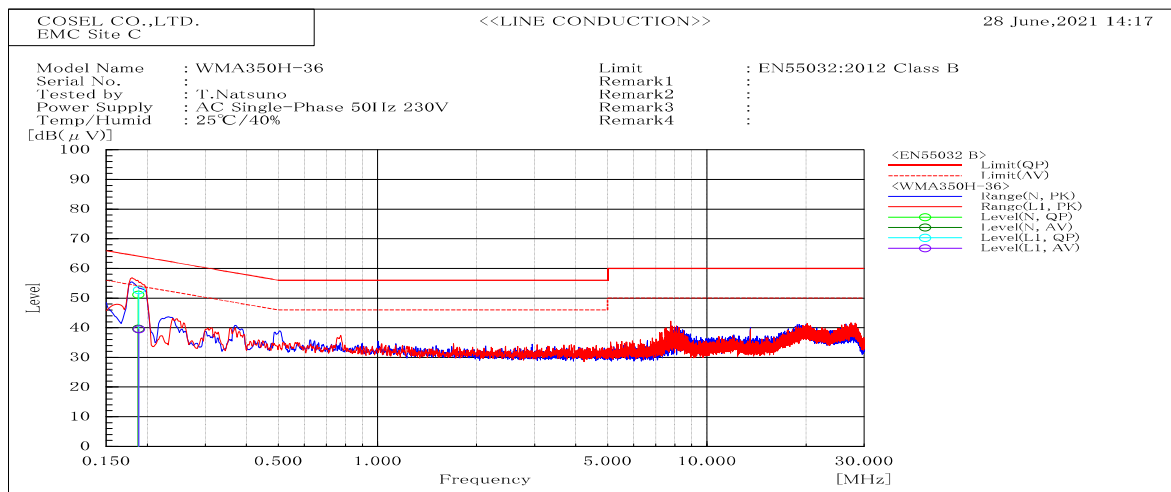


Frequency MHz	Line	Level dB(μV)	Limit dB(μV)	Margin dB	Pass/Fail	Remark
		QP	AV	QP	AV	
0.189	L1	52.7	39.5	64.1	54.1	11.4 14.6 Pass
0.188	N	51.1	39.7	64.1	54.1	13 14.4 Pass

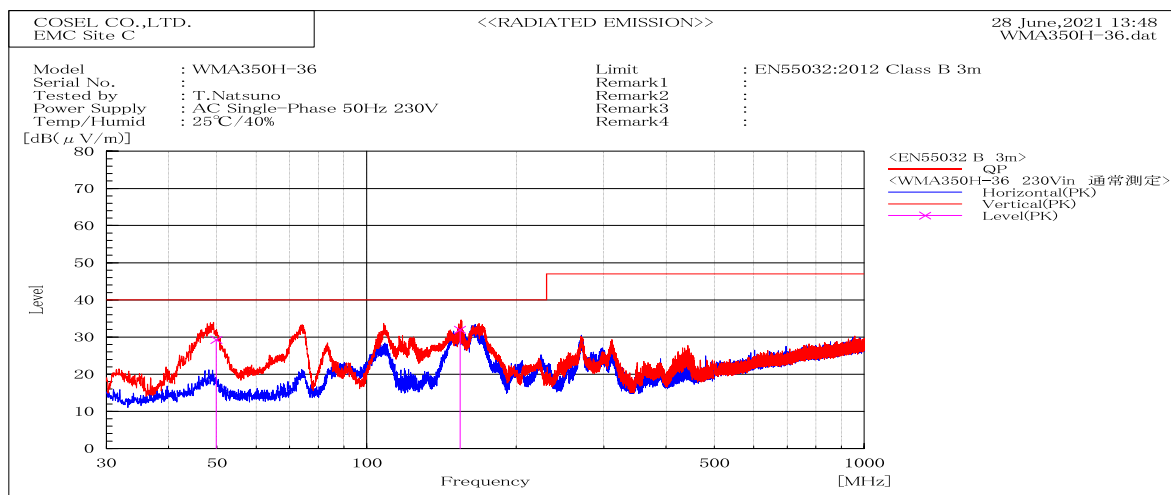


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
154.131	V	Stable	31.9	40	8.1	Pass	100	174.6	
49.879	V	Stable	29.3	40	10.7	Pass	100	275.9	

DATA SHEET		Date	29-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Natsuno

## 1. Line conduction

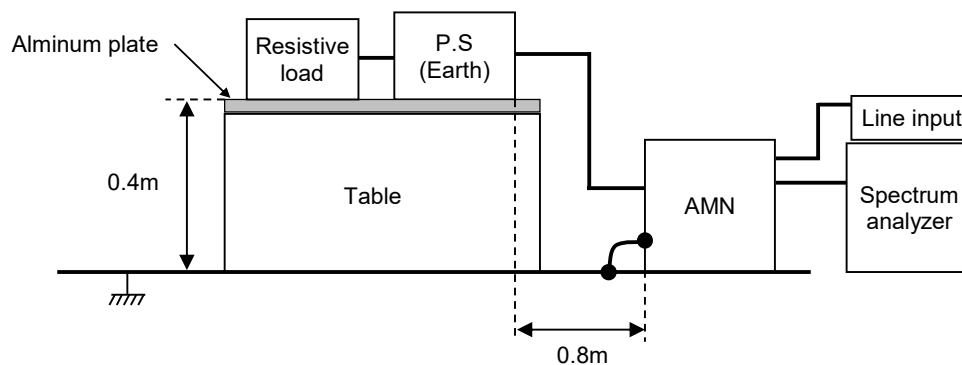

## 2. Radiated emission

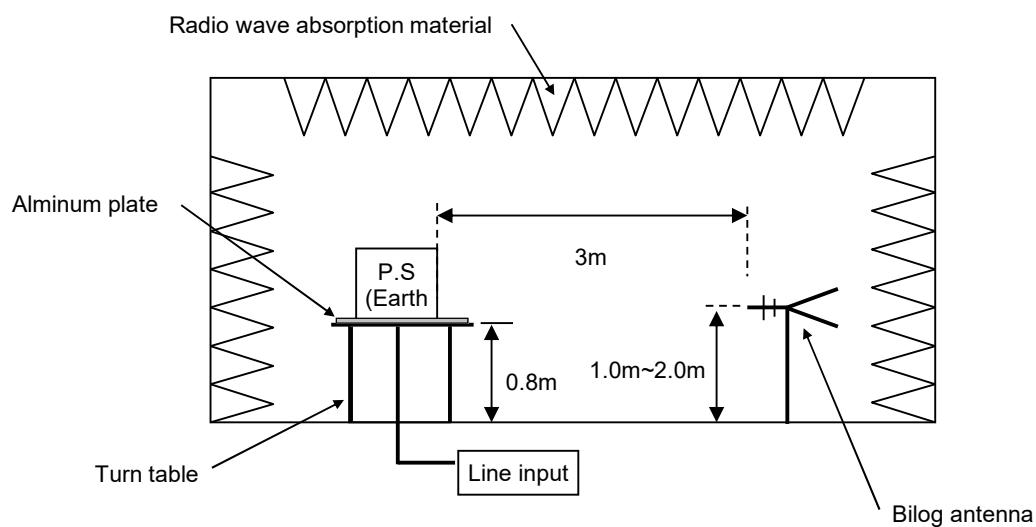


## Conditions

Test : EMI  
Model Name : WMA350H

## ○Photographs of Test Set-Up

### 1. LINE CONDUCTION

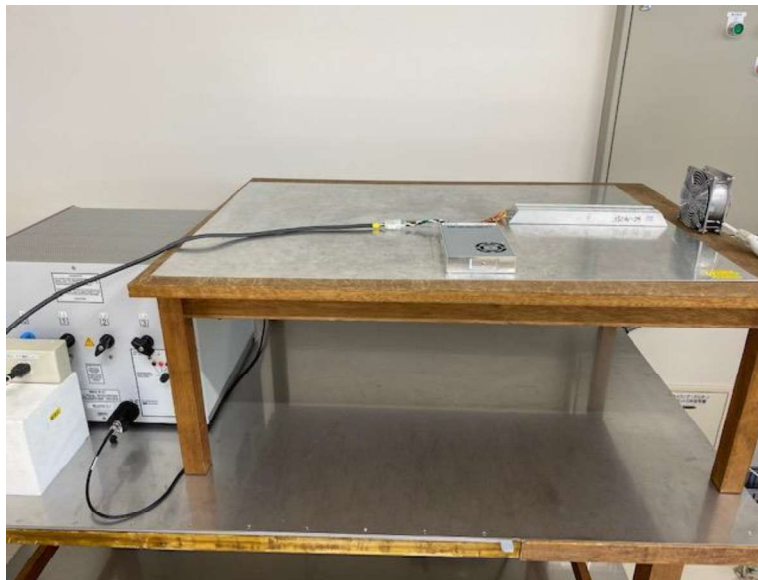

### 2. RADIATED EMISSION

