



DATA SHEET		Date	28-Nov-19
Model	WMA350H-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

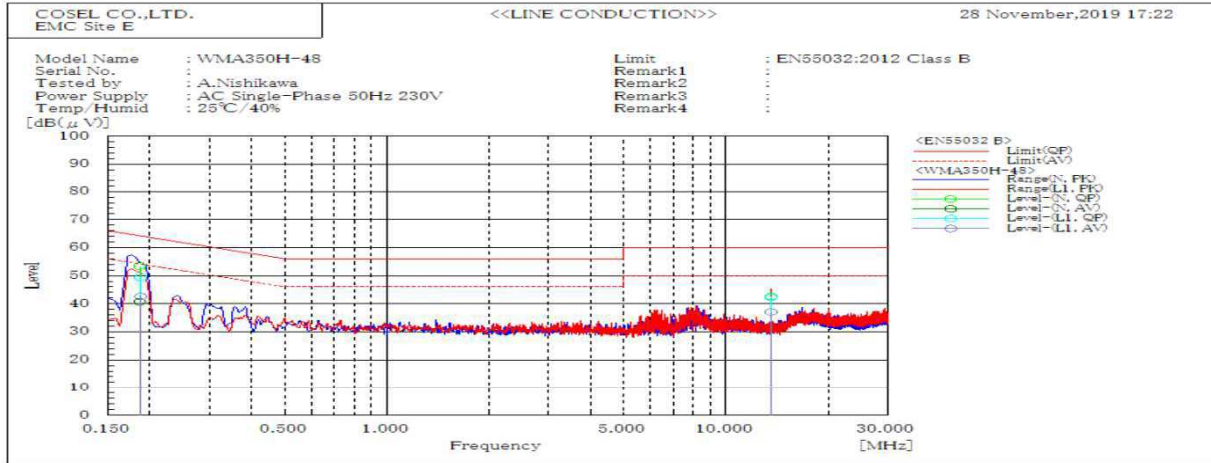


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.188	L1	49.3	42.6	64.1	54.1	14.8	11.5	Pass	
13.561	L1	42.4	37.1	60	50	17.6	12.9	Pass	
0.187	N	53.3	40.7	64.2	54.2	10.9	13.5	Pass	
13.56	N	42.6	37.1	60	50	17.4	12.9	Pass	

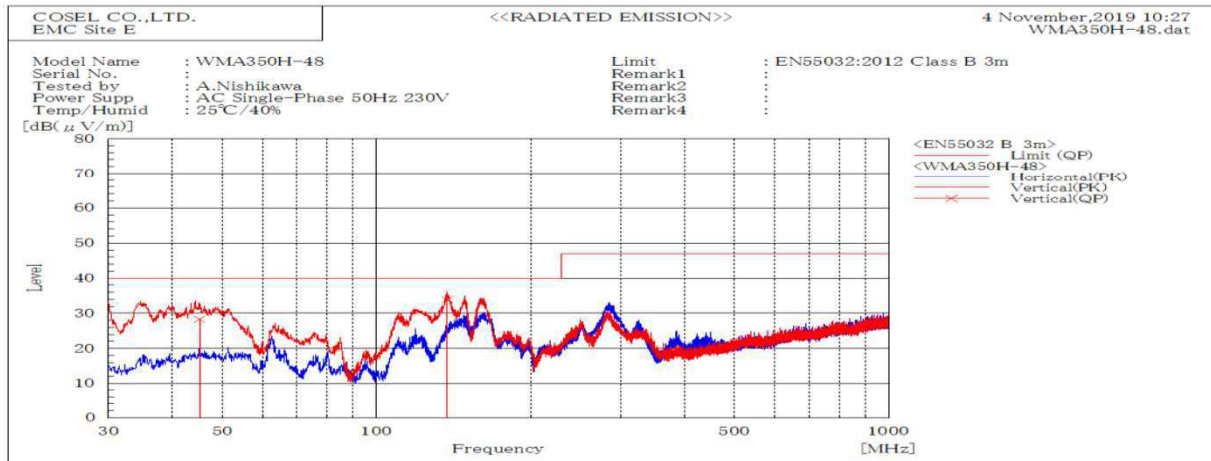


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
45.228	V	Stable	28.3	40	11.7	Pass	100.2	284.6	
137.641	V	Stable	33.8	40	6.2	Pass	100	338.8	

DATA SHEET		Date	28-Nov-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

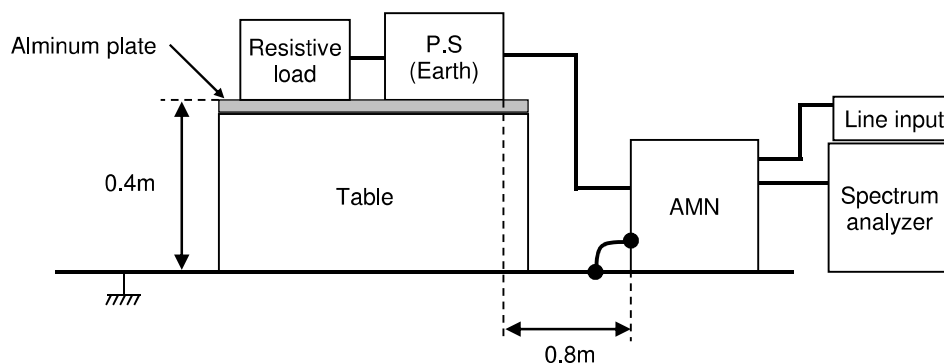

2. Radiated emission

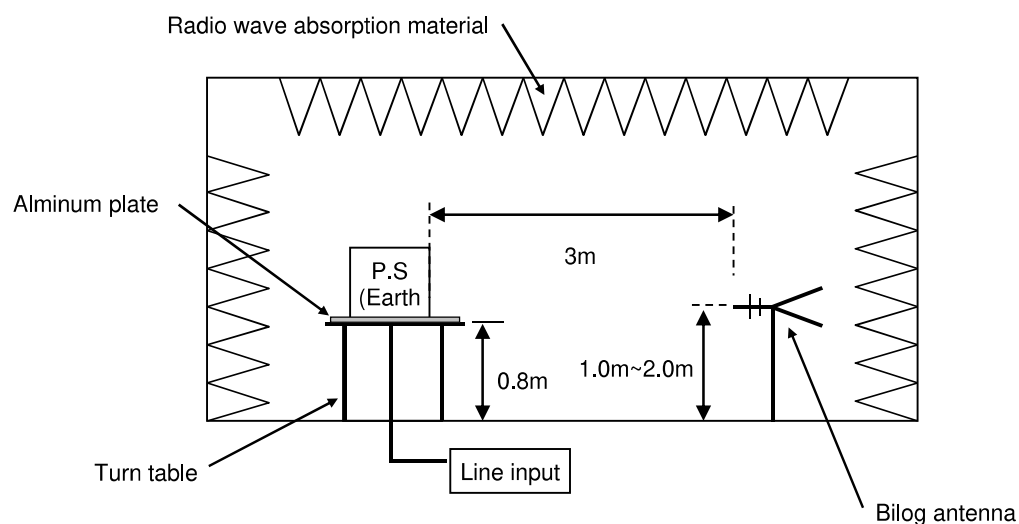


Conditions

Test : EMI
Model Name: WMA350H-48

Photographs of Test Set-Up

1. LINE CONDUCTION

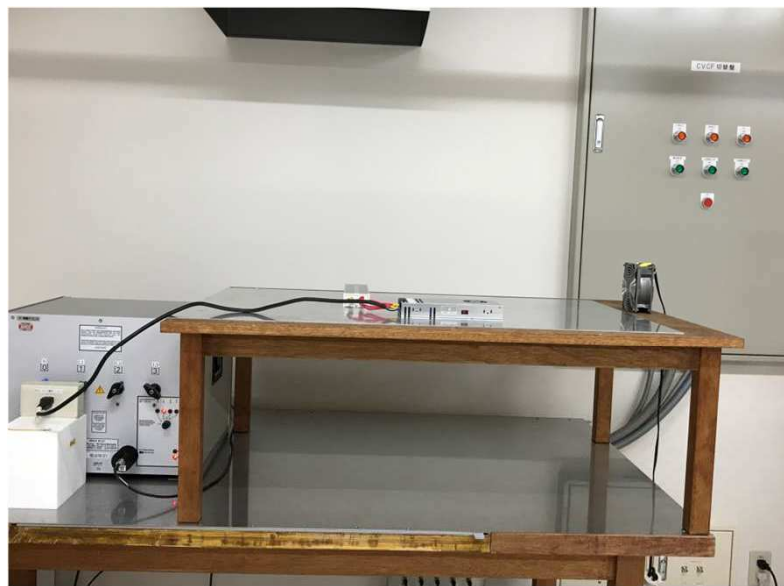

2. RADIATED EMISSION

