



DATA SHEET		Date	05-Nov-20
Model	WMA35F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

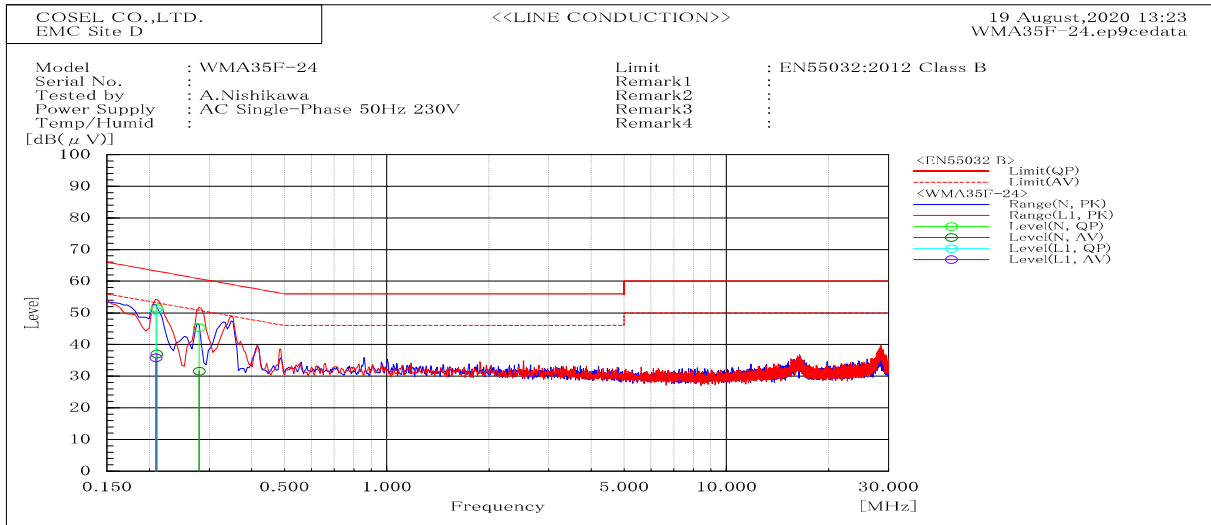


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.209	L1	50.7	35.8	63.2	53.2	12.5	17.4	Pass	
0.21	N	51.4	37	63.2	53.2	11.8	16.2	Pass	
0.28	N	45.3	31.6	60.8	50.8	15.5	19.2	Pass	

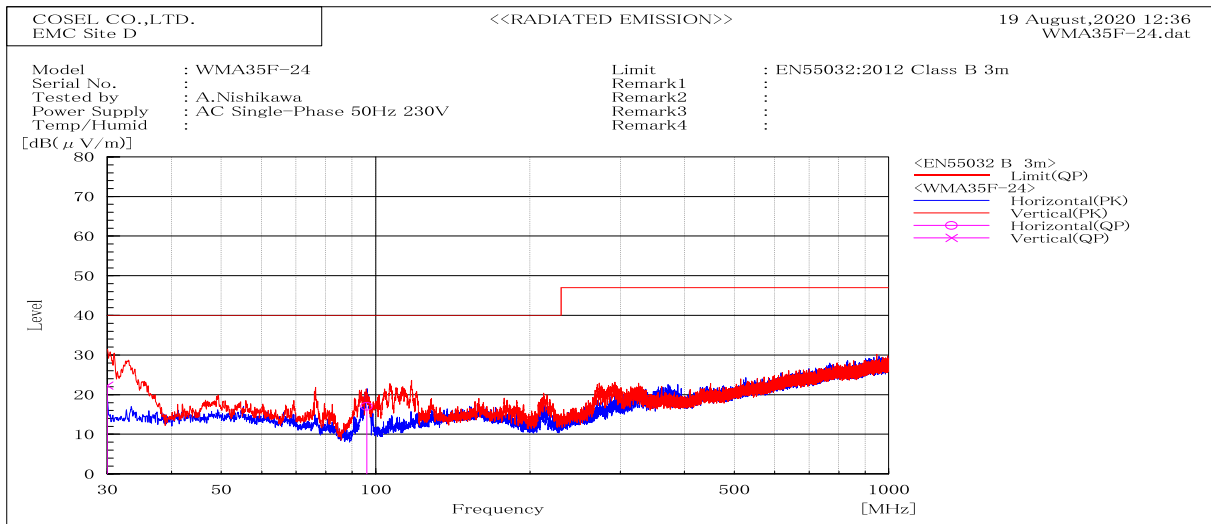


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
30.011	V	Stable	22.3	40	17.7	Pass	100.2	162.5		
96.111	H	Stable	17	40	23	Pass	191.4	83.4		

DATA SHEET		Date	05-Nov-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

### 1. Line conduction

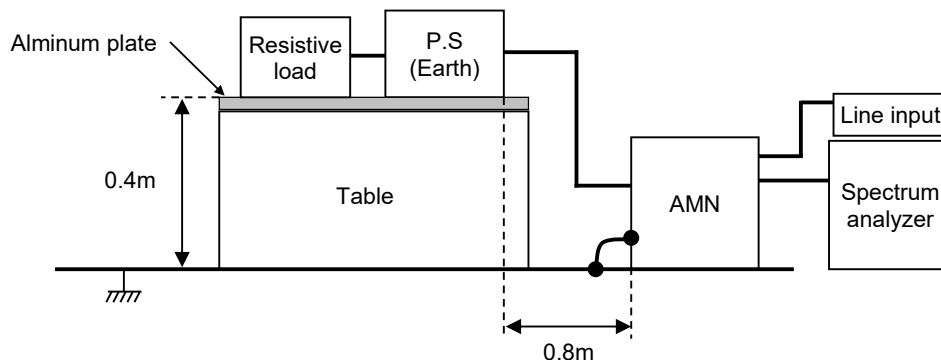

### 2. Radiated emission

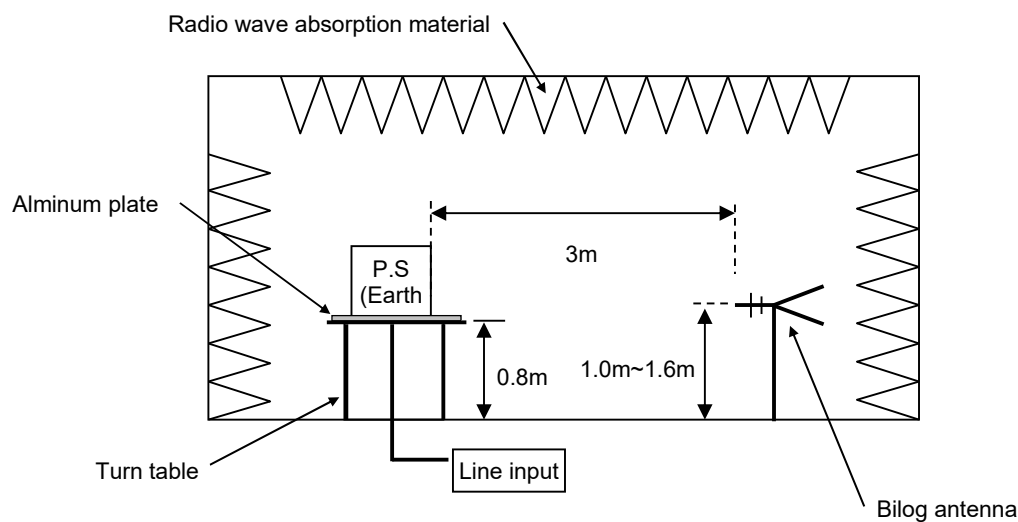

## Conditions

Test : EMI  
Model Name: WMA35F-24

Photographs of Test Set-Up

### 1. LINE CONDUCTION



### 2. RADIATED EMISSION

