



DATA SHEET		Date	05-Nov-20
Model	WMA35F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

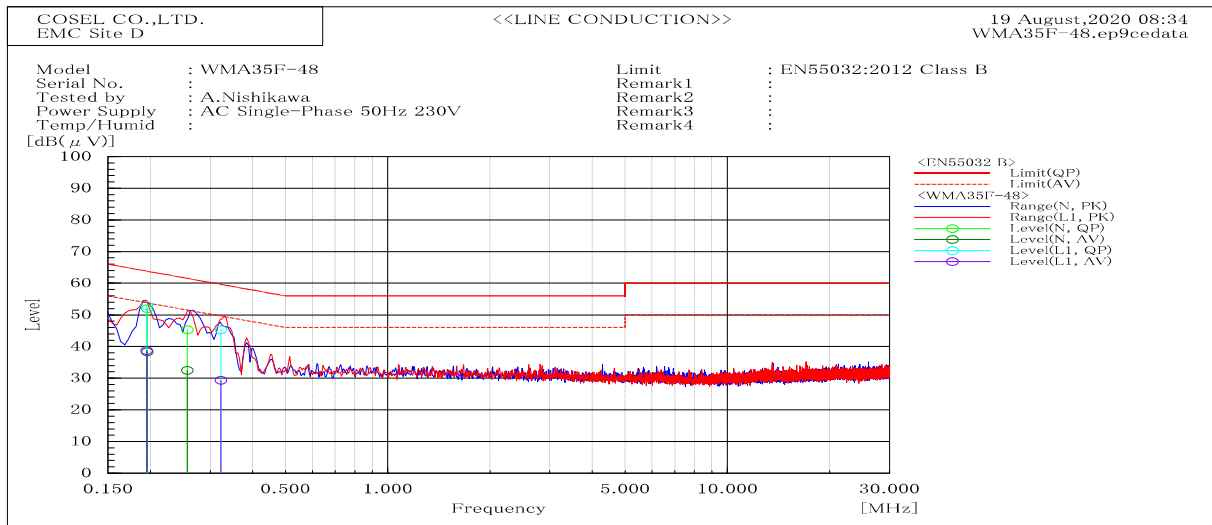


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L1	52.9	38.7	63.8	53.8	10.9	15.1	Pass	
0.323	L1	45.3	29.3	59.6	49.6	14.3	20.3	Pass	
0.196	N	52	38.3	63.8	53.8	11.8	15.5	Pass	
0.257	N	45.3	32.5	61.5	51.5	16.2	19	Pass	

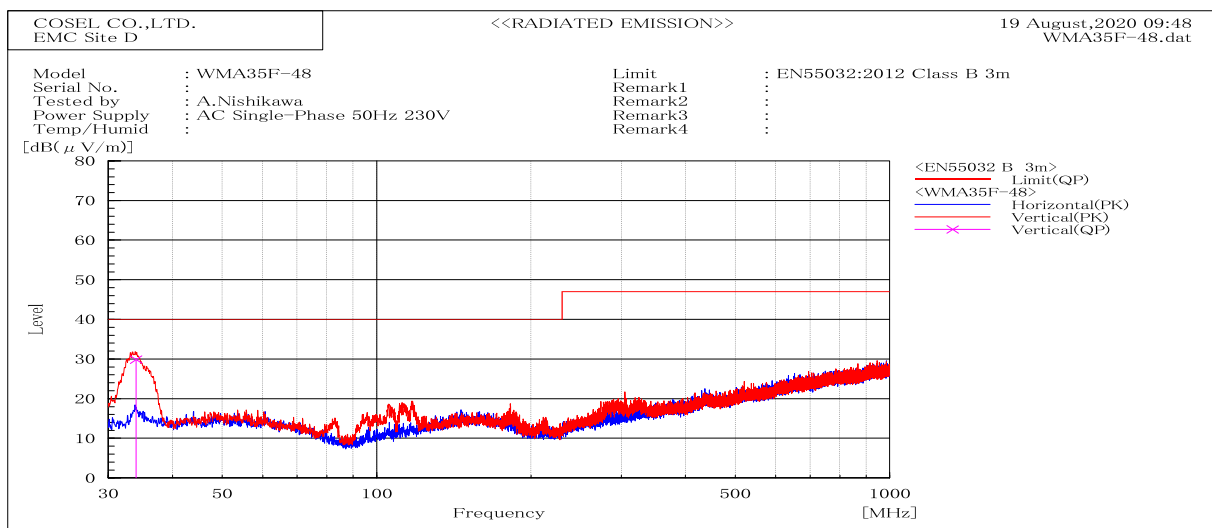


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV						
33.952	V	Stable	29.9	40	40	10.1	Pass	100	0	

DATA SHEET		Date	05-Nov-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

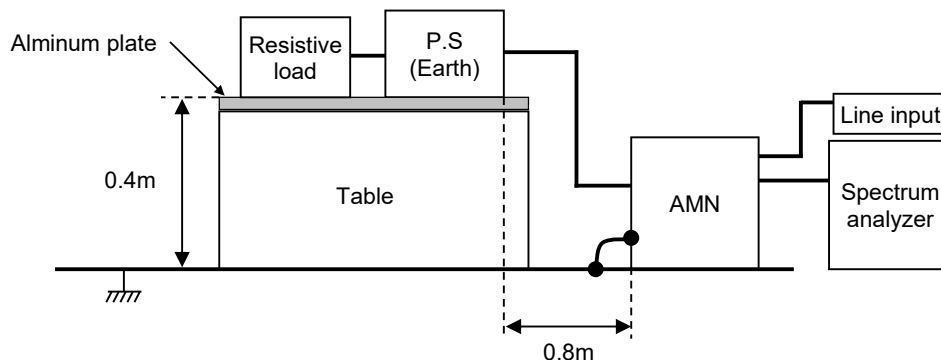

2. Radiated emission

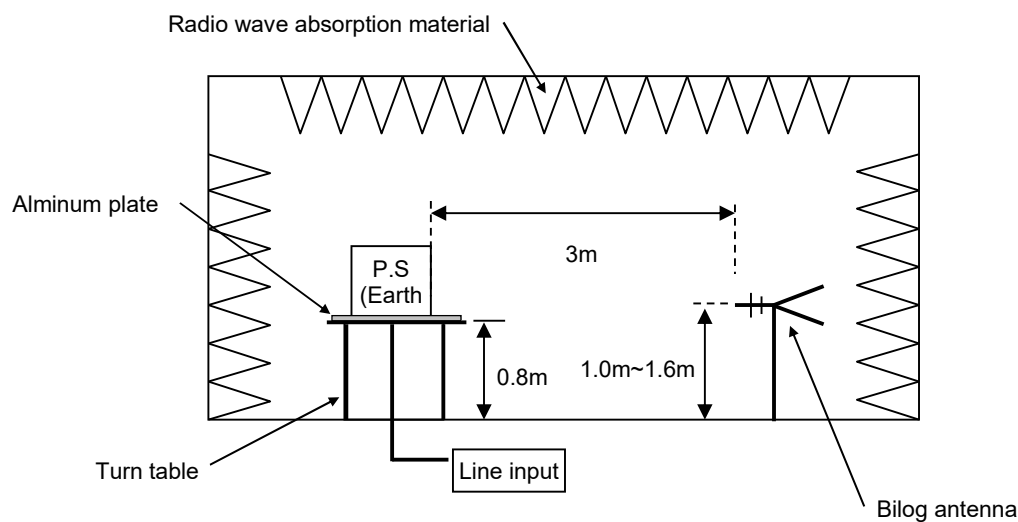

Conditions

Test : EMI
Model Name: WMA35F-48

Photographs of Test Set-Up

1. LINE CONDUCTION



2. RADIATED EMISSION

