



DATA SHEET		Date	05-Nov-20
Model	WMA35F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

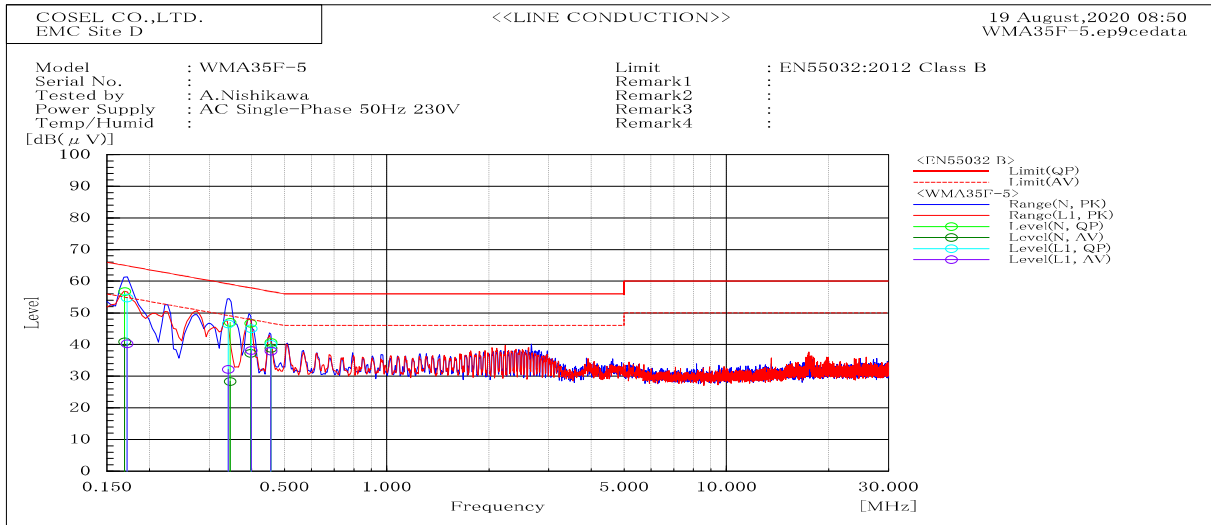


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.169	N	56.8	40.9	65	55	8.2	14.1	Pass	
0.172	L1	54.7	40.2	64.9	54.9	10.2	14.7	Pass	
0.341	L1	46.5	32.1	59.2	49.2	12.7	17.1	Pass	
0.346	N	47	28.4	59.1	49.1	12.1	20.7	Pass	
0.397	N	46.7	37.2	57.9	47.9	11.2	10.7	Pass	
0.399	L1	45.1	38.1	57.9	47.9	12.8	9.8	Pass	
0.456	N	40.6	38.8	56.8	46.8	16.2	8	Pass	
0.456	L1	40.1	38	56.8	46.8	16.7	8.8	Pass	

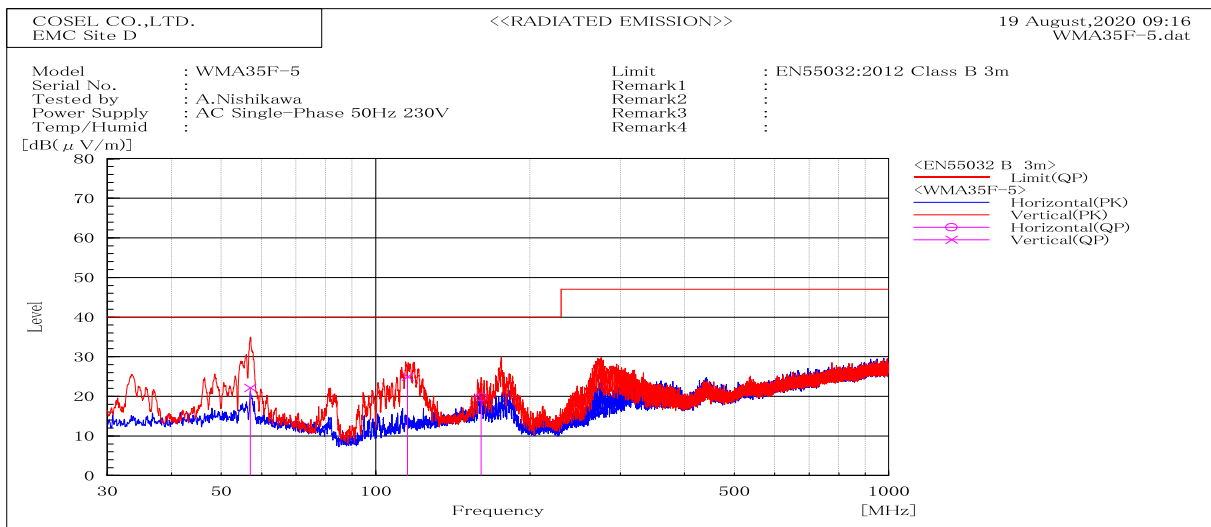


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
56.968	V	Stable	22.2	40	17.8	Pass	100.2	294.4	
115.466	V	Stable	24.9	40	15.1	Pass	101.4	116.9	
160.535	H	Stable	19.8	40	20.2	Pass	189.8	76	

DATA SHEET		Date	05-Nov-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

## 1. Line conduction

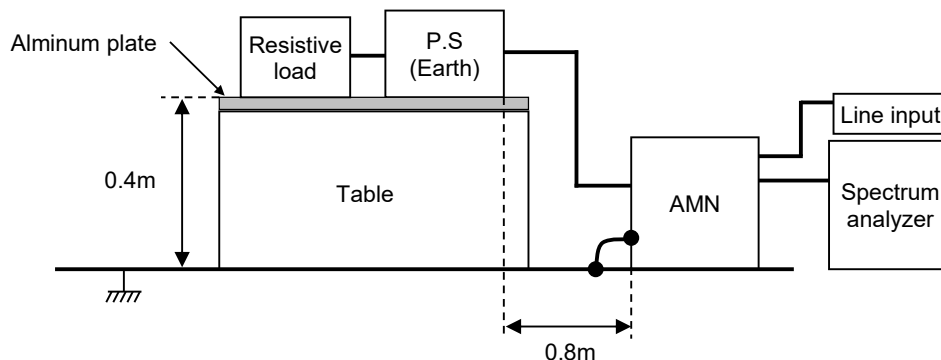

## 2. Radiated emission

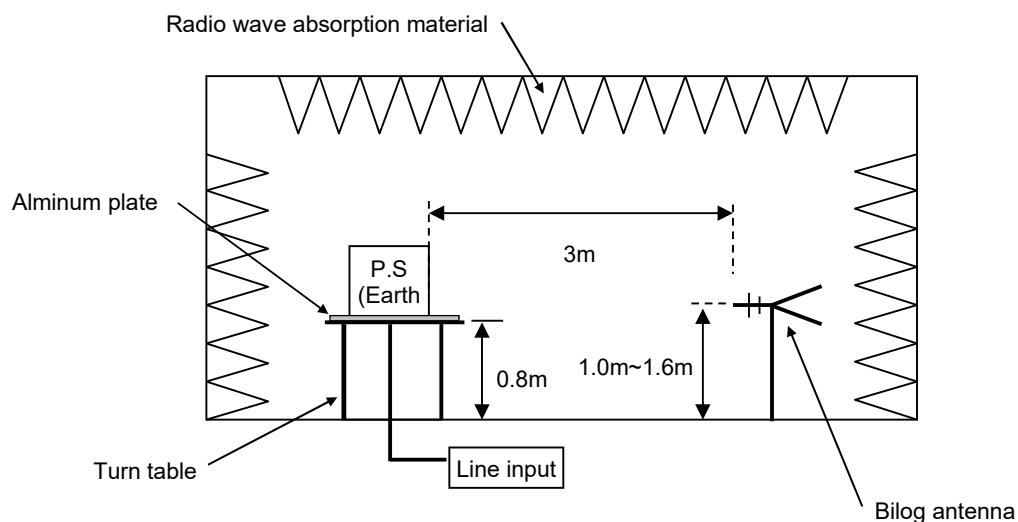

## Conditions

Test : EMI  
Model Name: WMA35F-5

Photographs of Test Set-Up

### 1. LINE CONDUCTION



### 2. RADIATED EMISSION

