



DATA SHEET		Date	05-Nov-20
Model	WMA75F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

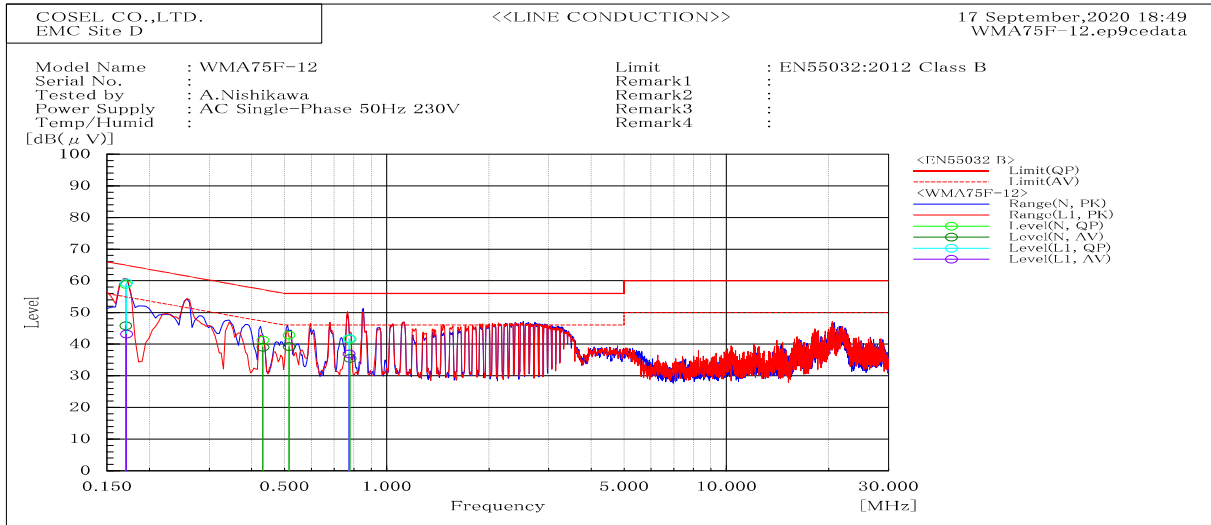


Frequency MHz	Line	Level		Limit		Margin		Pass/Fail	Remark
		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.171	L1	59.4	43.2	64.9	54.9	5.5	11.7	Pass	
0.774	L1	41.8	36.9	56	46	14.2	9.1	Pass	
0.17	N	58.9	45.8	64.9	54.9	6	9.1	Pass	
0.432	N	41.3	39.1	57.2	47.2	15.9	8.1	Pass	
0.516	N	42.9	39.2	56	46	13.1	6.8	Pass	
0.779	N	41.6	35.5	56	46	14.4	10.5	Pass	

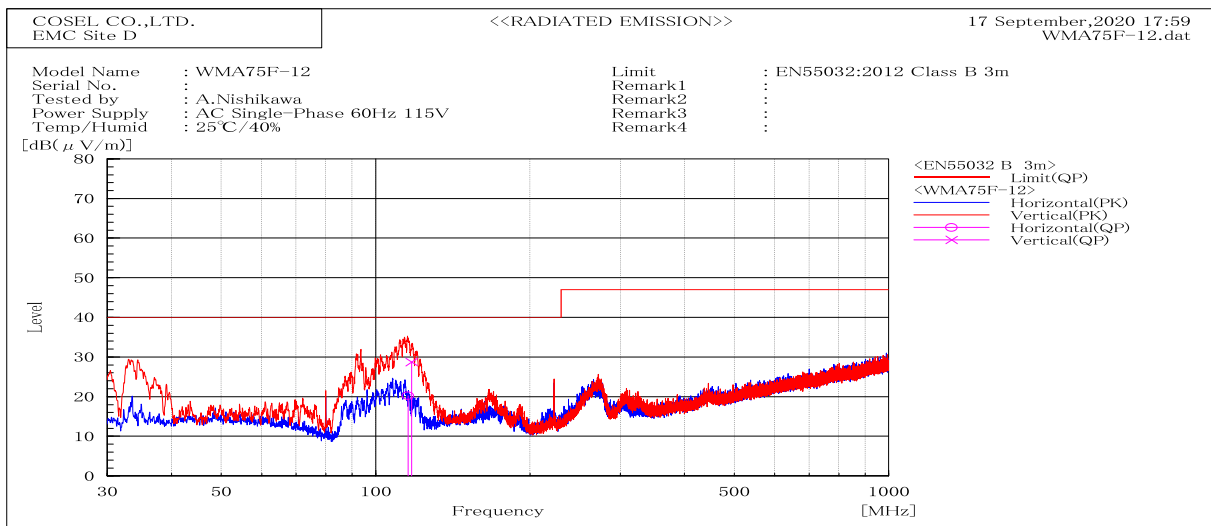


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
115.63	H	Stable	20.3	40	19.7	Pass	166.9	22.7	
117.645	V	Stable	28.8	40	11.2	Pass	105.4	325.7	

DATA SHEET		Date	05-Nov-20
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Nishikawa

1. Line conduction

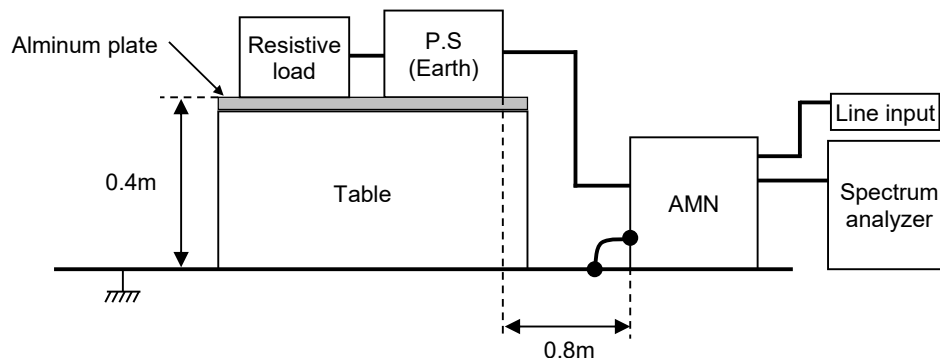

2. Radiated emission

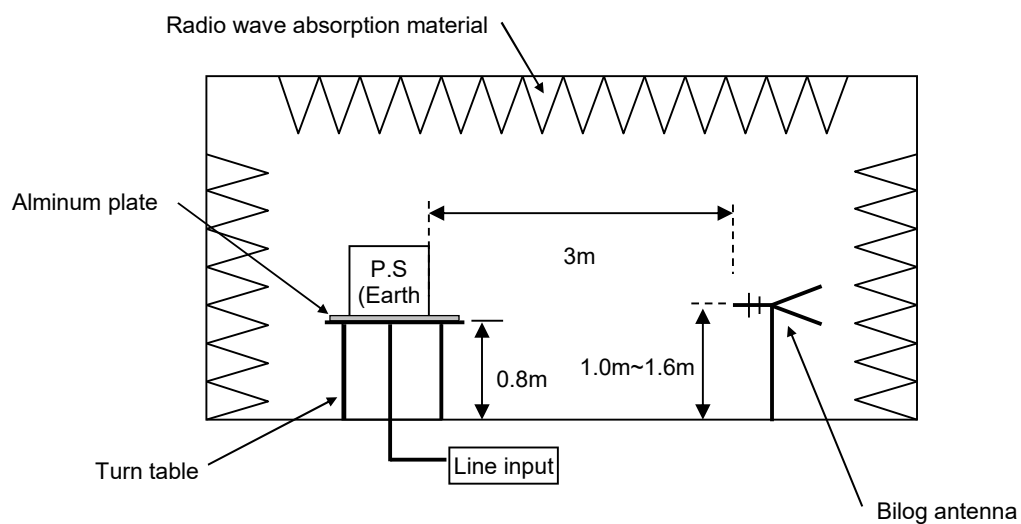


Conditions

Test : EMI
Model Name: WMA75F-12

Photographs of Test Set-Up

1. LINE CONDUCTION

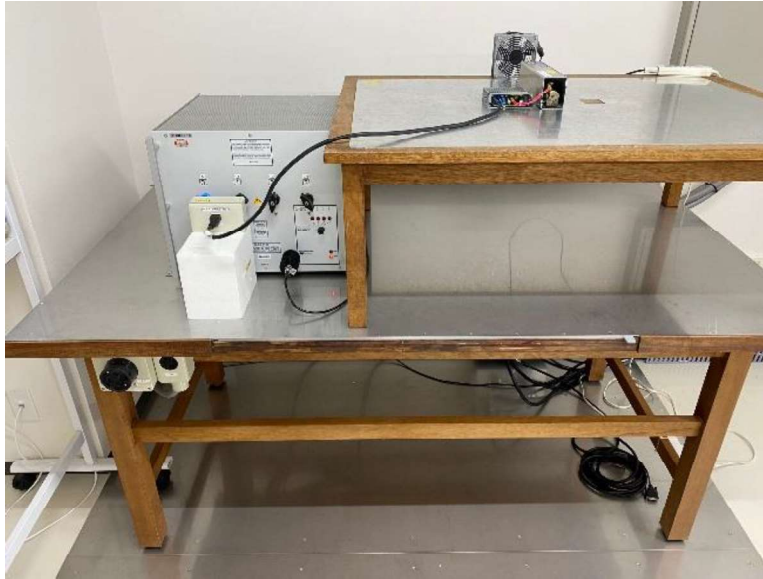

2. RADIATED EMISSION

