


WMA75F-48 Expected Life (Aluminum electrolytic capacitor)

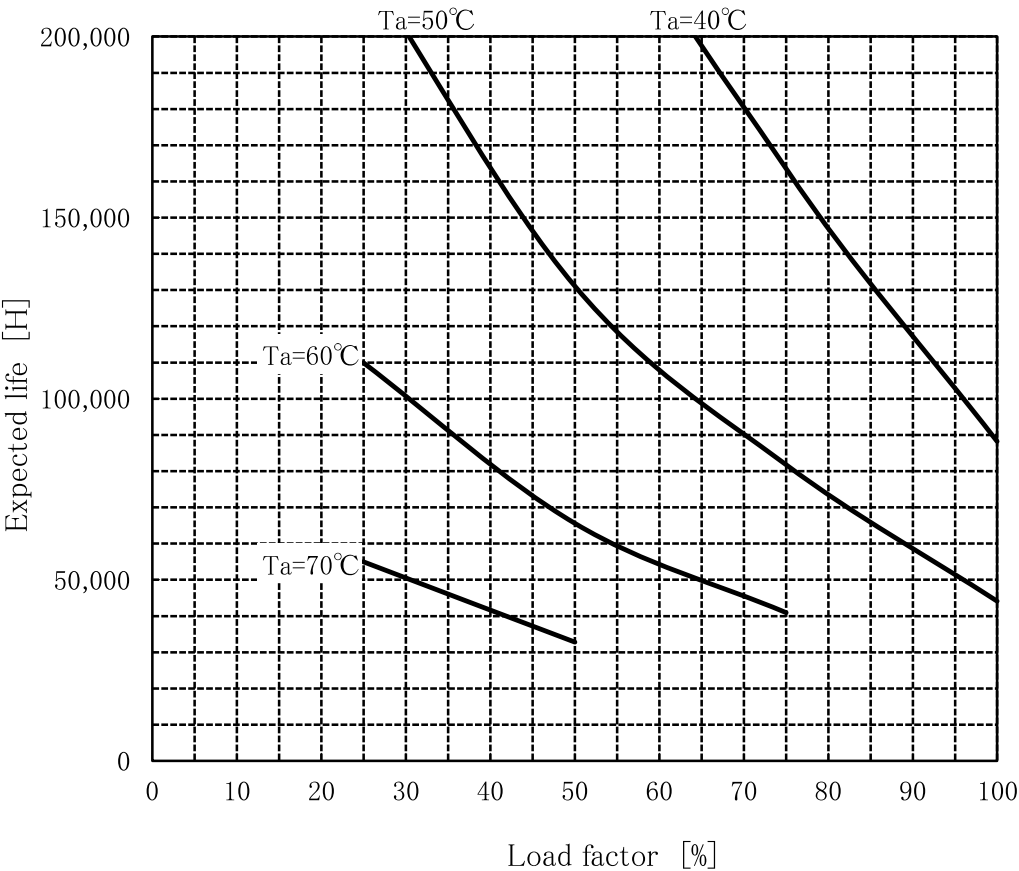

- Above expected life time is calculated according our calculation standard.
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.

Conditions

- (1)Input voltage AC100-264V 60Hz
- (2)Output voltage/current

DC OUTPUT	Load factor			
	100%	75%	50%	25%
48V	1.6A	1.2A	0.8A	0.4A

- (3)Cooling method Free cooling
- (4)Mounting method Refer below

