



TEST DATA OF ZTS34812

(48.0V INPUT)

Regulated DC Power Supply

Date : Mar.5. 1998

Approved by : N. Shiraishi
Design Manager

Prepared by : T. Tsun'
Design Engineer

コーセル株式会社
COSEL CO.,LTD.

CONTENTS

1. Line Regulation	1
静的入力変動	
2. Efficiency	2
効率	
3. Load Regulation	3
静的負荷変動	
4. Ripple Voltage (by Load Current)	4
リップル電圧(負荷電流特性)	
5. Ripple-Noise	5
リップルノイズ	
6. Overcurrent Protection	6
過電流保護	
7. Dynamic Load Responce	7
動的負荷変動	
8. Rise and Fall Time	8
立上り、立下がり時間	
9. Ambient Temperature Drift	9
周囲温度変動	
10. Minimum Input Voltage for Regulated Output Voltage . . .	10
最低レギュレーション電圧	
11. Ripple Voltage (by Ambient Temperature)	11
リップル電圧(周囲温度特性)	
12. Time Lapse Drift	12
経時ドリフト	
13. Output Voltage Accuracy	13
定電圧精度	
14. Condensation	14
結露特性	
15. Figure of Testing Circuitry	15
測定回路図	

(Final Page 15)

COSEL

Model		ZTS34812	
Item		Line Regulation 静的入力変動	
Object		+12V0.25A	

1. Graph

-----□-----

Load 50%

-----△-----

Load 100%

[V]

12.09

12.05

12.01

11.97

11.93

11.89

11.85

0

Output Voltage

12.09

12.05

12.01

11.97

11.93

11.89

11.85

0

0

40

50

60

70

80

Input Voltage

[V]

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。

2. Values

Input Voltage [V]	Load 50%	Load 100%
	Output Volt. [V]	Output Volt. [V]
33.0	11.955	11.953
36.0	11.955	11.953
42.0	11.955	11.954
48.0	11.955	11.954
54.0	11.955	11.954
60.0	11.955	11.954
66.0	11.955	11.953
72.0	11.955	11.954
75.0	11.955	11.953
—	—	—
—	—	—
—	—	—

COSEL

Model ZTS34812		Temperature 25°C Testing Circuitry Figure A
Item	Efficiency 効率	
Object		

1. Graph

-----□----- Load 50%

-----△----- Load 100%

Efficiency [%]

84

80

76

72

68

64

60

56

0

Input Voltage [V]

30

50

70

Note: Slanted line shows the range of the rated input voltage.

(注)斜線は定格入力電圧範囲を示す。



2. Values

Input Voltage [V]	Load 50%	Load 100%
	Efficiency [%]	Efficiency [%]
33.0	74.4	78.5
36.0	72.9	78.6
42.0	70.0	77.6
48.0	67.2	76.3
54.0	64.9	74.7
60.0	62.7	73.0
66.0	60.6	71.4
72.0	58.7	69.8
75.0	57.7	68.9
—	—	—
—	—	—
—	—	—


COSEL

Model ZTS34812		Temperature 25°C																																																
Item	Load Regulation 静的負荷変動	Testing Circuitry Figure A																																																
Object	+12V0.25A																																																	
1. Graph		2. Values																																																
<div> <div> <div>△</div> <div>Input Volt. 36.0V</div> </div> <div> <div>□</div> <div>Input Volt. 48.0V</div> </div> <div> <div>○</div> <div>Input Volt. 72.0V</div> </div> </div>		<table> <tr> <th rowspan="2">Load Current [A]</th><th>Input Volt. 36.0[V]</th><th>Input Volt. 48.0[V]</th><th>Input Volt. 72.0[V]</th></tr> <tr> <th>Output Volt. [V]</th><th>Output Volt. [V]</th><th>Output Volt. [V]</th></tr> <tr><td>0.00</td><td>11.957</td><td>11.958</td><td>11.962</td></tr> <tr><td>0.04</td><td>11.956</td><td>11.956</td><td>11.957</td></tr> <tr><td>0.08</td><td>11.956</td><td>11.956</td><td>11.956</td></tr> <tr><td>0.12</td><td>11.955</td><td>11.956</td><td>11.956</td></tr> <tr><td>0.16</td><td>11.955</td><td>11.955</td><td>11.955</td></tr> <tr><td>0.20</td><td>11.955</td><td>11.955</td><td>11.955</td></tr> <tr><td>0.24</td><td>11.954</td><td>11.955</td><td>11.955</td></tr> <tr><td>0.25</td><td>11.954</td><td>11.955</td><td>11.954</td></tr> <tr><td>0.28</td><td>11.954</td><td>11.954</td><td>11.954</td></tr> <tr><td>—</td><td>—</td><td>—</td><td>—</td></tr> </table>		Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]	0.00	11.957	11.958	11.962	0.04	11.956	11.956	11.957	0.08	11.956	11.956	11.956	0.12	11.955	11.956	11.956	0.16	11.955	11.955	11.955	0.20	11.955	11.955	11.955	0.24	11.954	11.955	11.955	0.25	11.954	11.955	11.954	0.28	11.954	11.954	11.954	—	—	—	—
Load Current [A]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]																																															
	Output Volt. [V]	Output Volt. [V]	Output Volt. [V]																																															
0.00	11.957	11.958	11.962																																															
0.04	11.956	11.956	11.957																																															
0.08	11.956	11.956	11.956																																															
0.12	11.955	11.956	11.956																																															
0.16	11.955	11.955	11.955																																															
0.20	11.955	11.955	11.955																																															
0.24	11.954	11.955	11.955																																															
0.25	11.954	11.955	11.954																																															
0.28	11.954	11.954	11.954																																															
—	—	—	—																																															
<p>Note: Slanted line shows the range of the rated load current.</p> <p>(注)斜線は定格負荷電流範囲を示す。</p>																																																		

COSEL

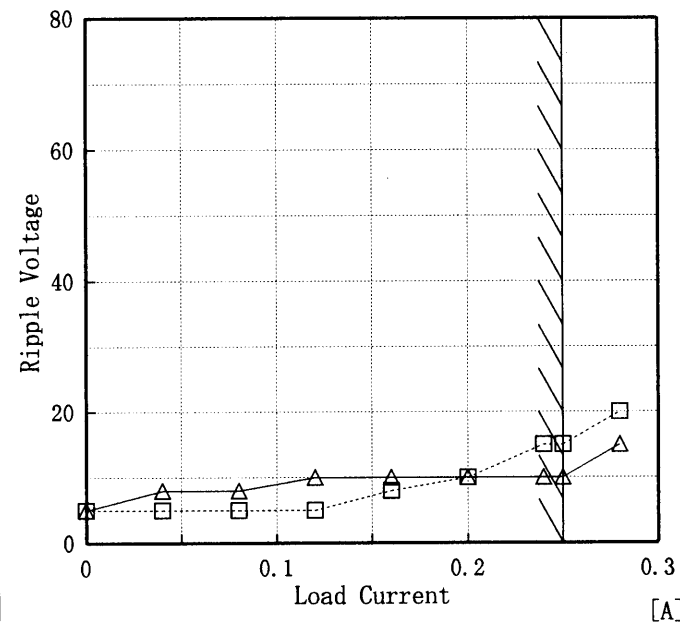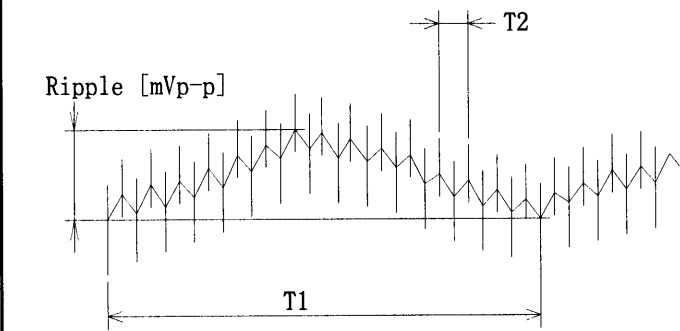Model		ZTS34812	Temperature		25℃																																						
Item		Ripple Voltage(by Load Current) リップル電圧(負荷電流特性)	Testing Circuitry		Figure A																																						
Object		+12V0.25A																																									
1. Graph			2.Values																																								
<div><div>-----□-----</div>Input Volt. 36.0V</div> <div><div>-----△-----</div>Input Volt. 72.0V</div> <div></div>			<table><tr><th rowspan="2">Load Current [A]</th><th>Input Volt. 36.0 [V]</th><th>Input Volt. 72.0 [V]</th></tr><tr><th>Ripple Output Volt. [mV]</th><th>Ripple Output Volt. [mV]</th></tr><tr><td>0.00</td><td>5</td><td>5</td></tr><tr><td>0.04</td><td>5</td><td>8</td></tr><tr><td>0.08</td><td>5</td><td>8</td></tr><tr><td>0.12</td><td>5</td><td>10</td></tr><tr><td>0.16</td><td>8</td><td>10</td></tr><tr><td>0.20</td><td>10</td><td>10</td></tr><tr><td>0.24</td><td>15</td><td>10</td></tr><tr><td>0.25</td><td>15</td><td>10</td></tr><tr><td>0.28</td><td>20</td><td>15</td></tr><tr><td>—</td><td>—</td><td>—</td></tr><tr><td>—</td><td>—</td><td>—</td></tr></table>			Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]	0.00	5	5	0.04	5	8	0.08	5	8	0.12	5	10	0.16	8	10	0.20	10	10	0.24	15	10	0.25	15	10	0.28	20	15	—	—	—	—	—	—
Load Current [A]	Input Volt. 36.0 [V]	Input Volt. 72.0 [V]																																									
	Ripple Output Volt. [mV]	Ripple Output Volt. [mV]																																									
0.00	5	5																																									
0.04	5	8																																									
0.08	5	8																																									
0.12	5	10																																									
0.16	8	10																																									
0.20	10	10																																									
0.24	15	10																																									
0.25	15	10																																									
0.28	20	15																																									
—	—	—																																									
—	—	—																																									
<p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>リップル電圧は、下図 p-p 値で示される。</p> <p>(注) 斜線は定格負荷電流範囲を示す。</p> <div><div>T1: Due to AC Input Line 入力商用周期</div><div>T2: Due to Switching スイッチング周期</div><div></div></div>																																											
<p>Fig. Complex Ripple Wave Form</p> <p>図 リップル波形詳細図</p>																																											

COSEL

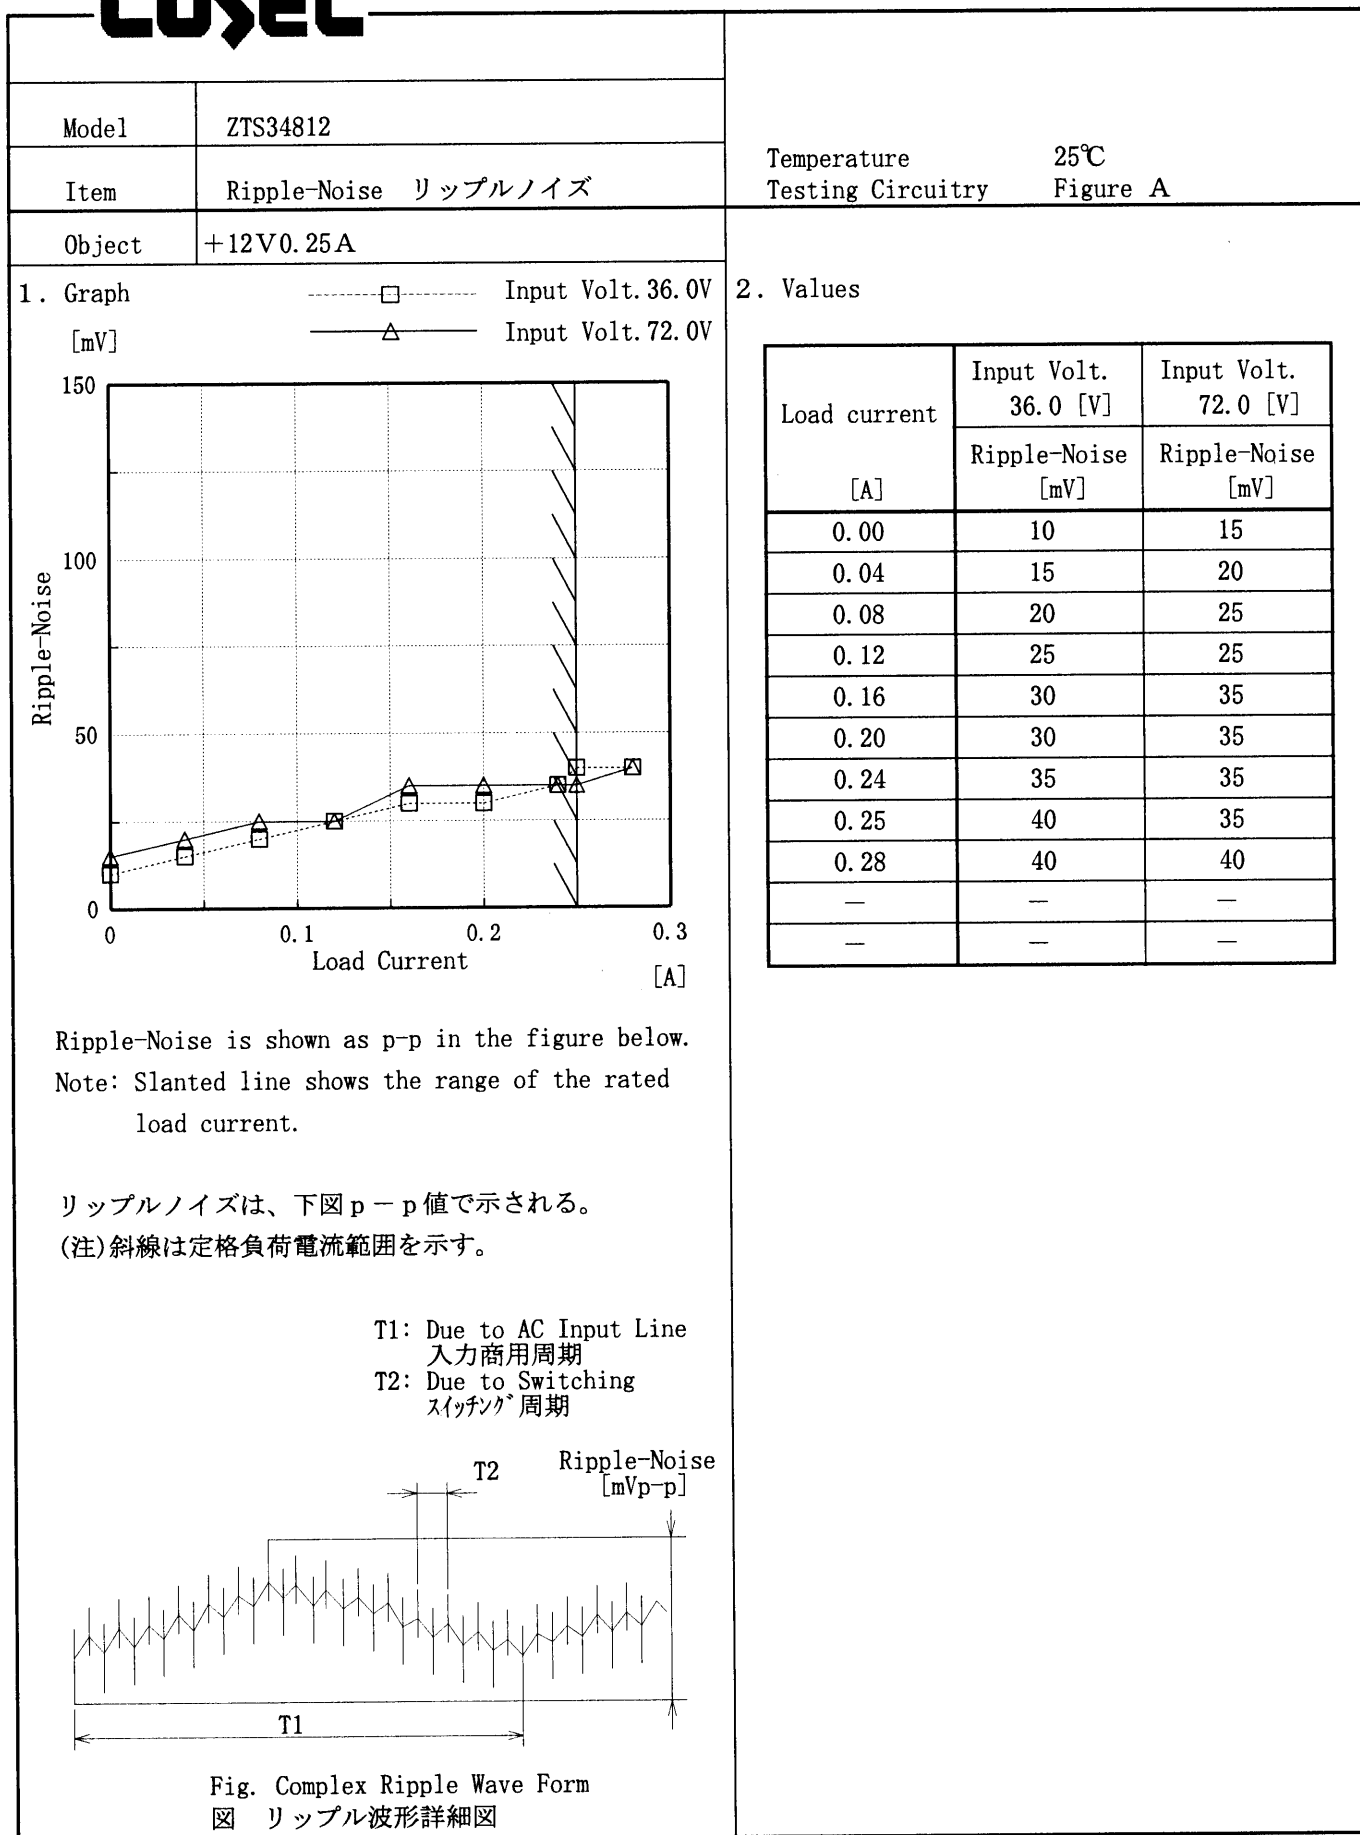

COSEL

Model		ZTS34812	Temperature 25℃ Testing Circuitry Figure A	
Item		Overcurrent Protection 過電流保護		
Object		+12V0.25A		

1. Graph

[V]

20

15

10

5

0

Output Voltage

00.10.20.30.40.5

Load Current

[A]

Note: Slanted line shows the range of the rated load current.

(注)斜線は定格負荷電流範囲を示す。

2. Values

Output Voltage [V]	Input Volt. 36.0[V]	Input Volt. 48.0[V]	Input Volt. 72.0[V]
	Load Curr- ent [A]	Load Curr- ent [A]	Load Curr- ent [A]
12.00	0.37	0.41	0.37
11.40	0.37	0.41	0.37
10.80	0.37	0.41	0.37
9.60	0.38	0.41	0.36
8.40	0.38	0.41	0.35
7.20	0.38	0.40	0.34
6.00	0.37	0.38	0.32
4.80	0.36	0.36	0.31
3.60	0.34	0.32	0.29
2.40	0.31	0.29	0.27
1.20	0.28	0.26	0.26
0.00	0.21	0.25	0.27

COSEL

Model	ZTS34812	Temperature	25°C
Item	Dynamic Load Responce 動的負荷変動	Testing Circuitry	Figure A
Object	+12V0.25A		

Input Volt. 48.0 V



Cycle 100 mS

Load Current

Min. Load ↔

Load 100 %



200 mV/div

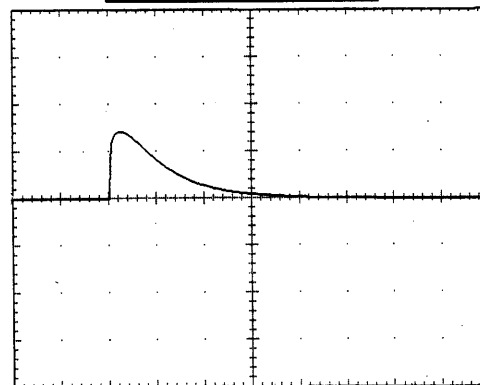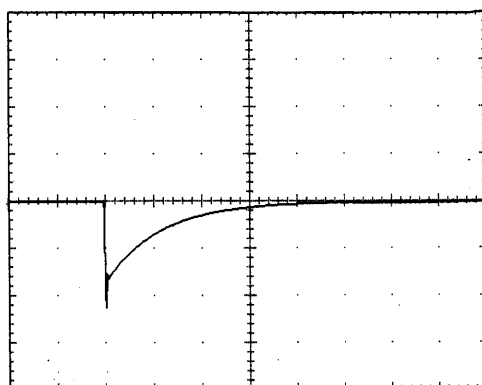

Min. Load ↔

Load 50 %



200 mV/div

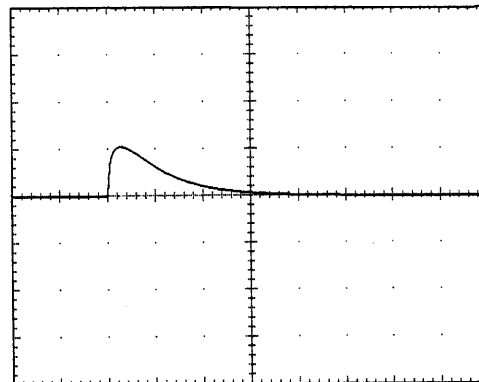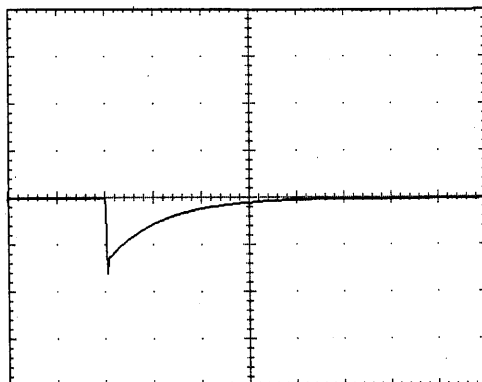

Load 50% ↔

Load 100 %

200 mV/div

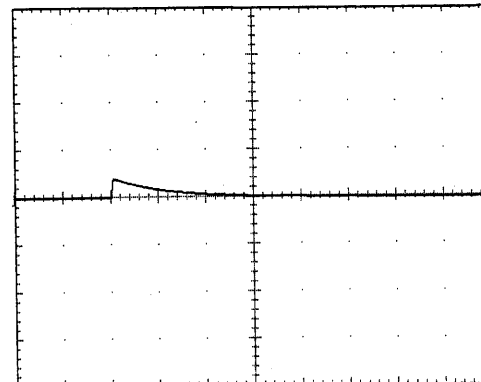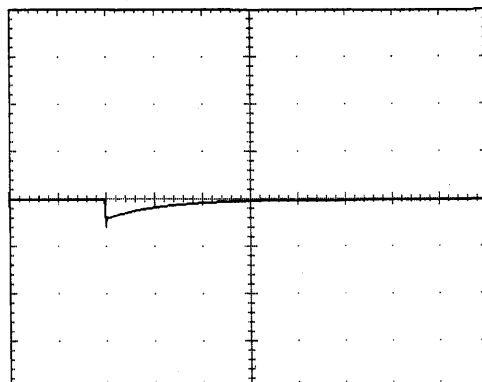


1 mS/div

COSEL

Model	ZTS34812	Temperature	25°C
Item	Rise and Fall Time 立上り、立下り時間	Testing Circuitry	Figure A
Object	+12V0.25A		

1. Graph


Input Volt. 36.0 V

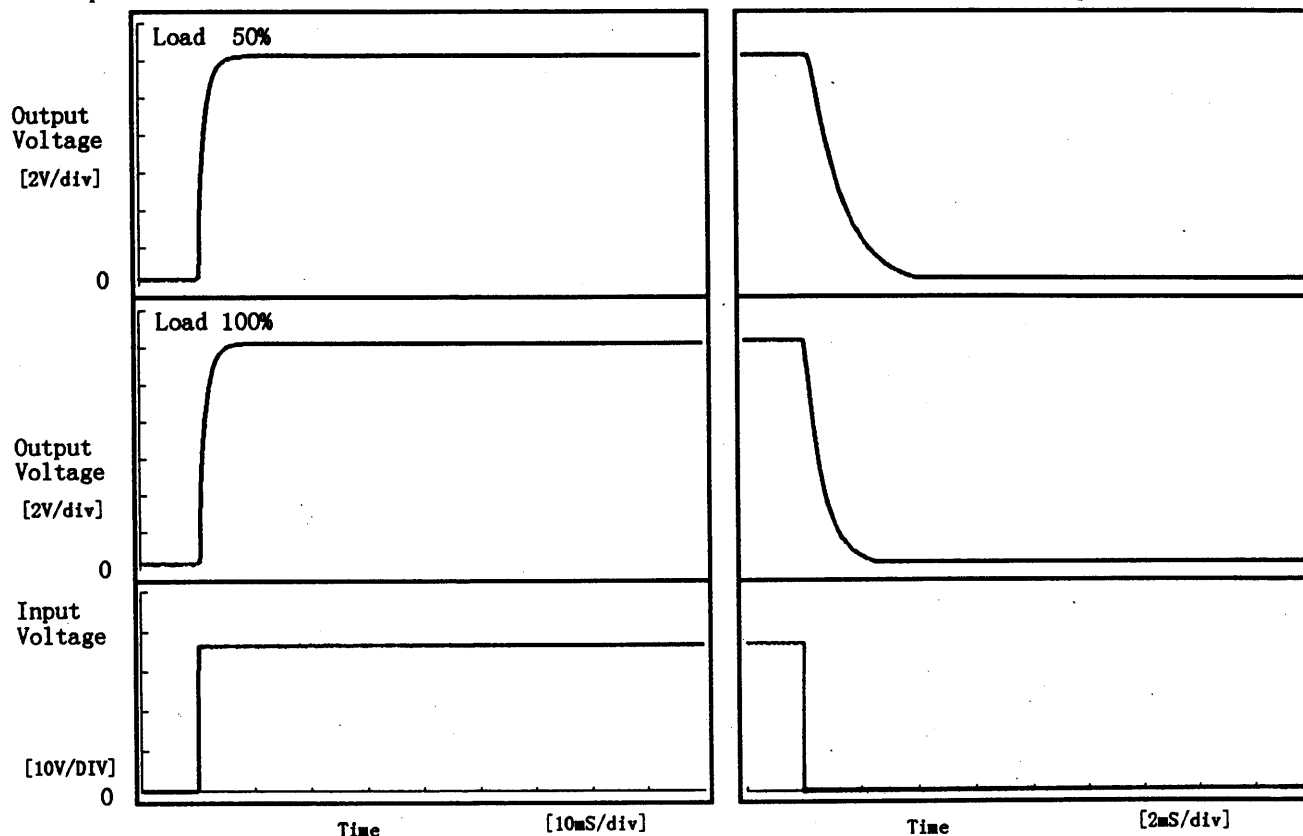


2. Values

[mS]

Load \ Time	T d	T r	T s	T h	T f
50 %	0.45	2.65	3.10	0.49	2.22
100 %	0.45	2.65	3.10	0.22	1.31

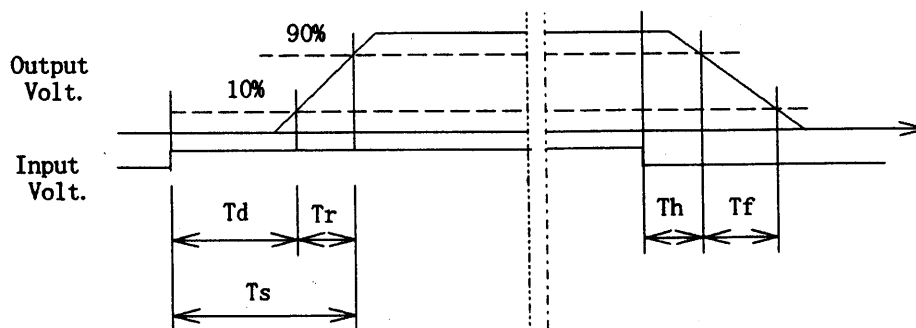

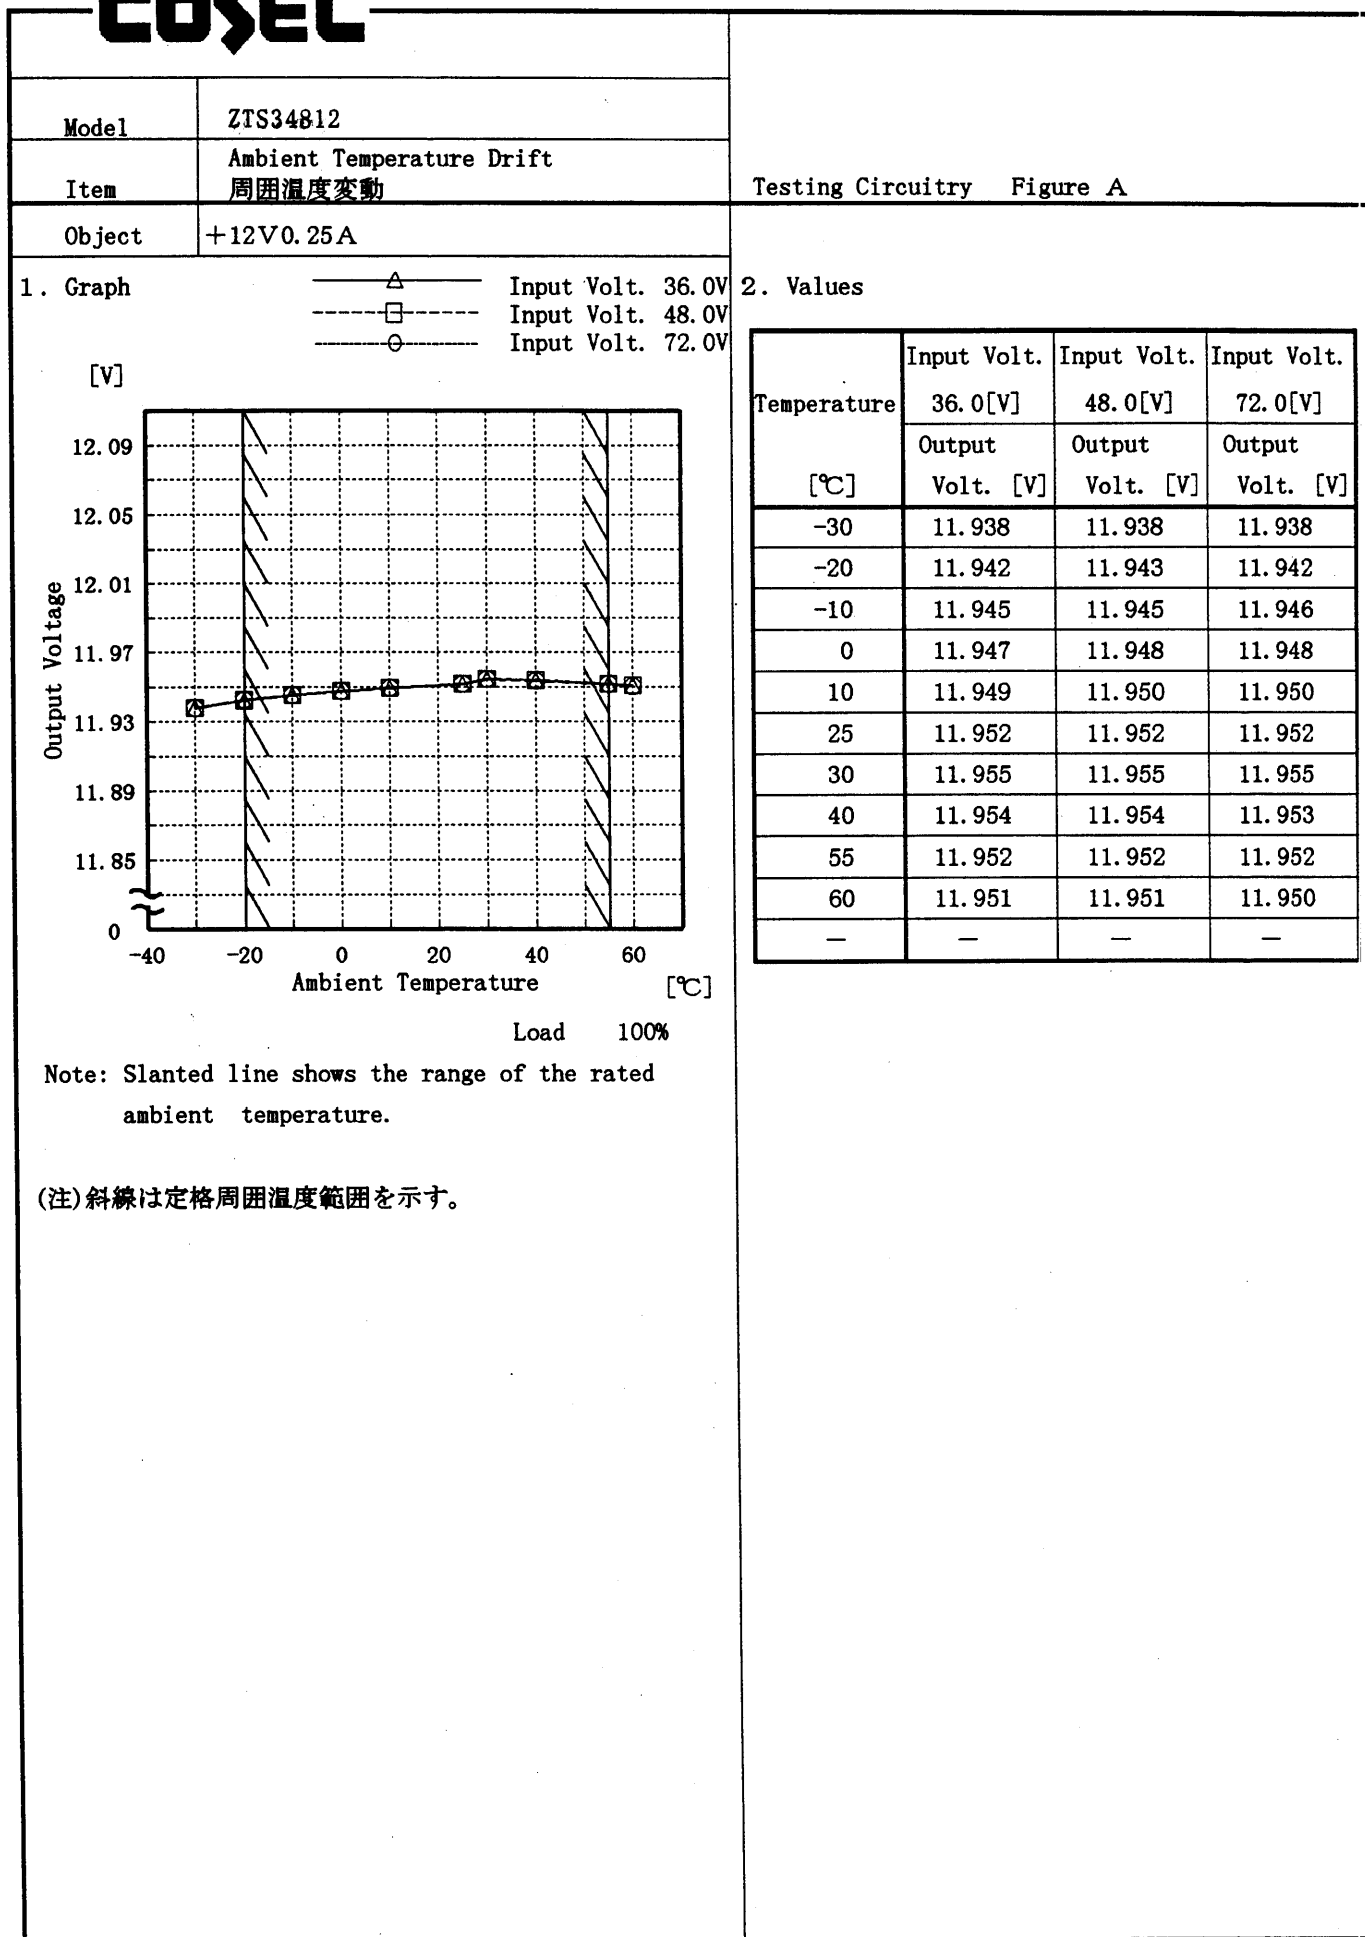COSEL

COSEL

Model		ZTS34812
Item	Minimum Input Voltage for Regulated Output Voltage 最低レギュレーション電圧	
Object	+12V0.25A	

1. Graph

-----□----- Load 50%

-----△----- Load 100%

[V]

60

50

40

30

20

10

0

Input Voltage

The graph plots Input Voltage [V] on the y-axis (0 to 60) against Ambient Temperature [°C] on the x-axis (-40 to 60). Two data series are shown: Load 50% (dashed line with square markers) and Load 100% (solid line with triangle markers). Both series show a slight decrease in input voltage as temperature increases. A slanted line with diagonal hatching indicates the range of the rated ambient temperature, approximately from -20°C to 55°C.

Ambient Temperature

[°C]

-40

-20

0

20

40

60


2. Values

Ambient Temp.	Load 50%	Load 100%
Input Volt.	Input Volt.	Input Volt.
[°C]	[V]	[V]
-30	22.4	26.9
-20	21.4	26.4
-10	20.9	25.4
0	20.4	24.9
10	19.9	24.4
25	18.9	23.4
30	18.9	23.4
40	18.4	23.4
55	17.9	23.4
60	17.9	23.9
—	—	—


Note: Slanted line shows the range of the rated ambient temperature.

(注)斜線は定格周囲温度範囲を示す。

COSEL

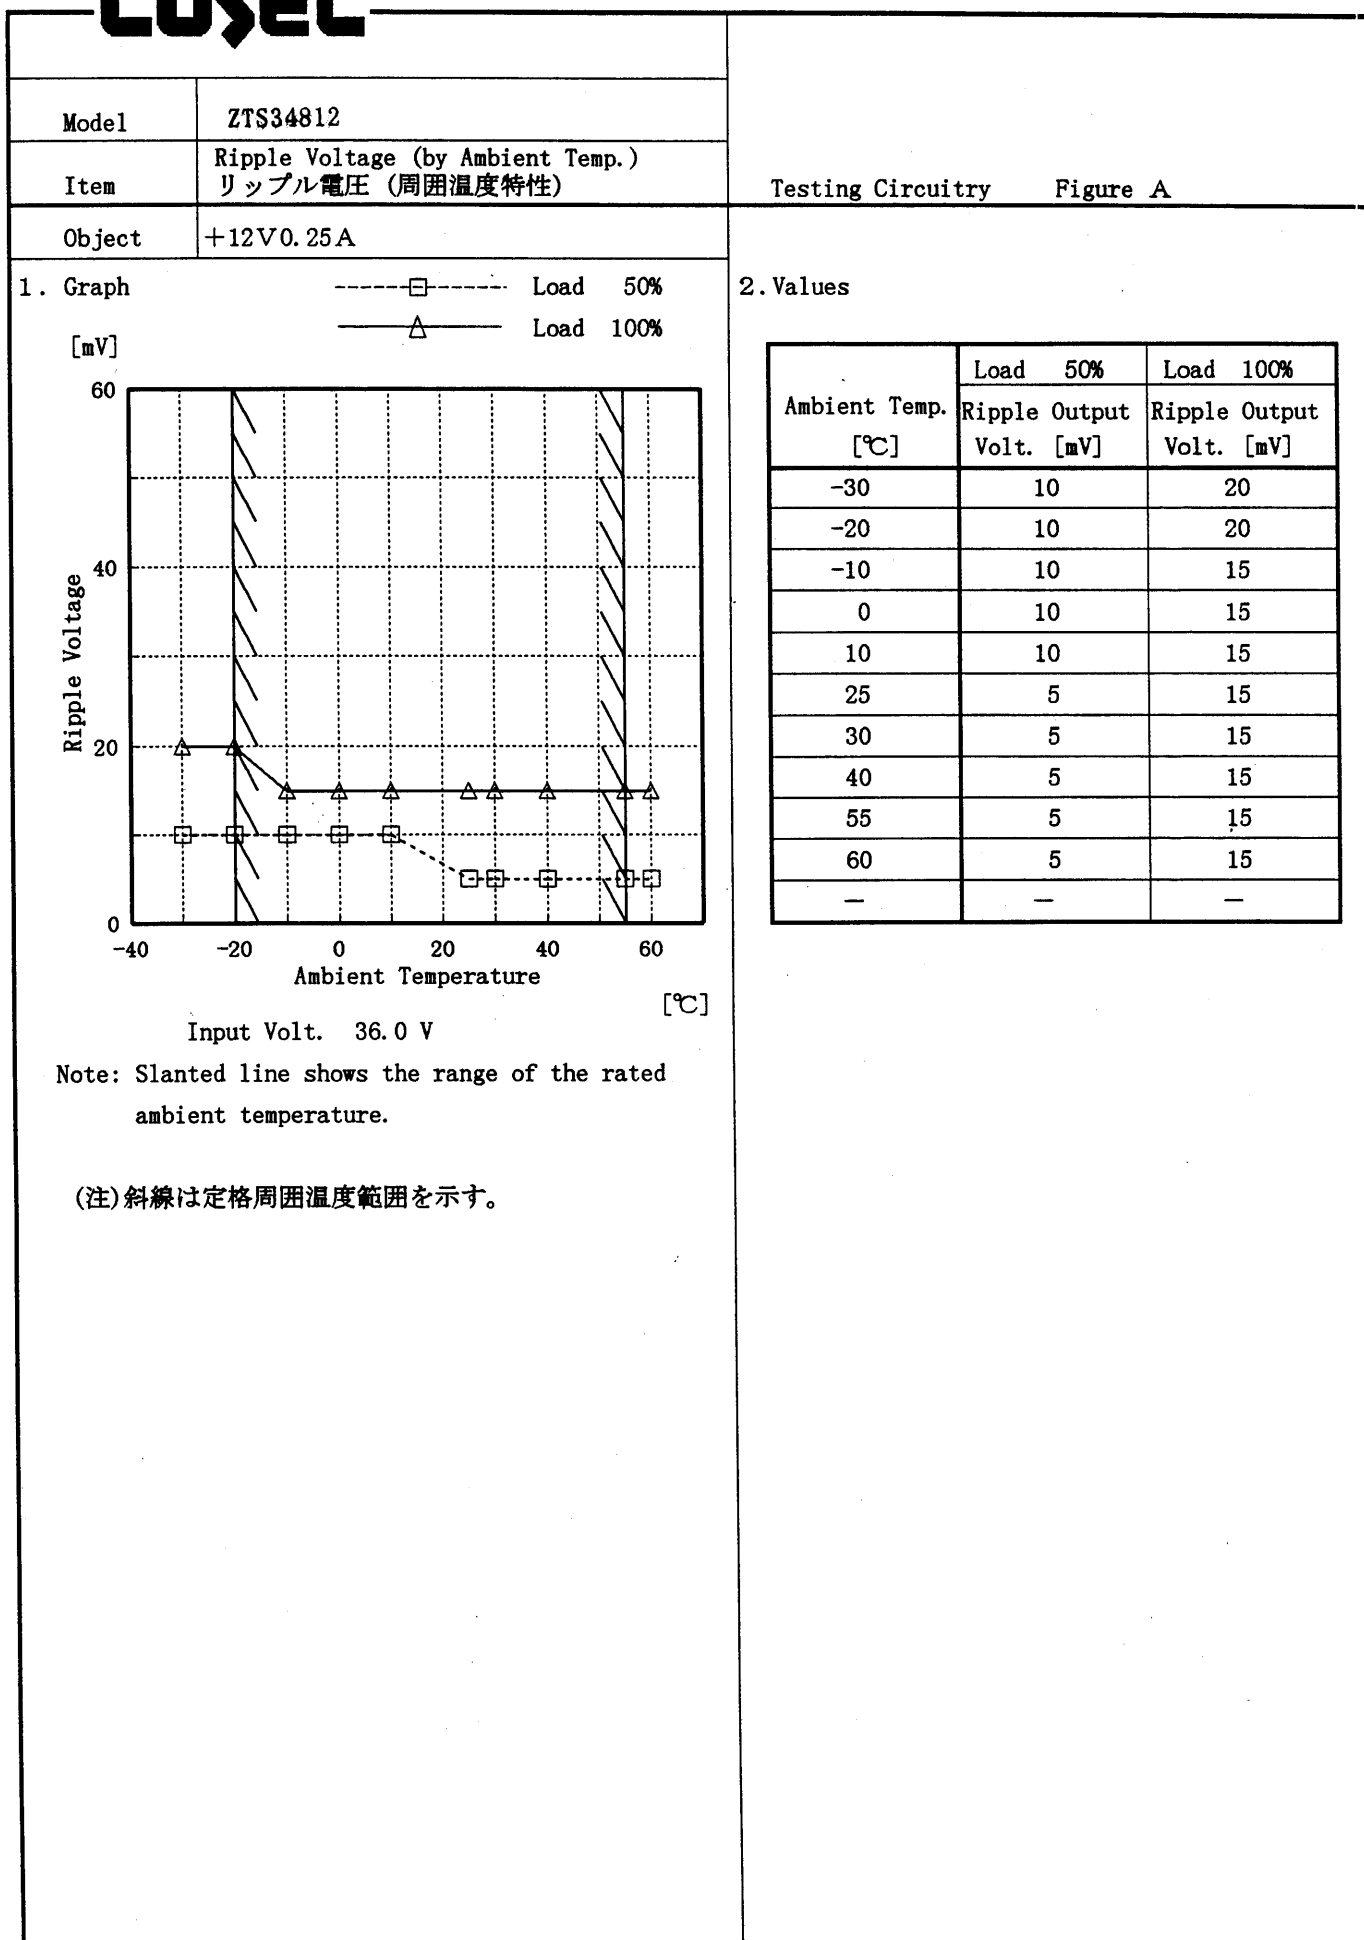

COSEL

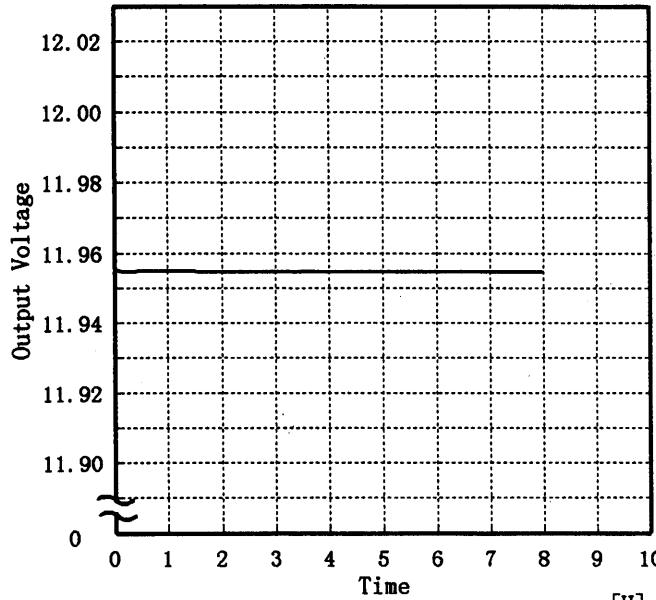COSEL																									
Model	ZTS34812																								
Item	Time Lapse Drift 経時ドリフト	Temperature	25 ℃																						
Object	+12V0.25A	Testing Circuitry	Figure A																						
1. Graph		2.Values																							
<p>[V]</p>  <p>Output Voltage</p> <p>Time [H]</p> <p>Input Volt. 48V</p> <p>Load 100%</p>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>11.955</td></tr><tr><td>0.5</td><td>11.955</td></tr><tr><td>1.0</td><td>11.955</td></tr><tr><td>2.0</td><td>11.955</td></tr><tr><td>3.0</td><td>11.955</td></tr><tr><td>4.0</td><td>11.955</td></tr><tr><td>5.0</td><td>11.955</td></tr><tr><td>6.0</td><td>11.955</td></tr><tr><td>7.0</td><td>11.955</td></tr><tr><td>8.0</td><td>11.955</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	11.955	0.5	11.955	1.0	11.955	2.0	11.955	3.0	11.955	4.0	11.955	5.0	11.955	6.0	11.955	7.0	11.955	8.0	11.955
Time since start [H]	Output Voltage [V]																								
0.0	11.955																								
0.5	11.955																								
1.0	11.955																								
2.0	11.955																								
3.0	11.955																								
4.0	11.955																								
5.0	11.955																								
6.0	11.955																								
7.0	11.955																								
8.0	11.955																								

COSEL

Model	ZTS34812	Testing Circuitry Figure A
Item	Output Voltage Accuracy 定電圧精度	
Object	+12V0.25A	

Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -20~55 °C

Input Voltage : 36.0~72.0 V

Load Current : 0.00~0.25 A

* Output Voltage Accuracy = $\pm (\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$

* Output Voltage Accuracy (Ratio) = $\frac{\text{Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

定電圧精度

周囲温度、入力電圧、負荷を下記仕様内で、任意に変動させたときの出力電圧の変動をいう。

周囲温度 -20~55 °C

入力電圧 36.0~72.0 V

負荷電流 0.00~0.25 A

* 定電圧精度(変動値) = $\pm (\text{出力電圧の最高値} - \text{出力電圧の最低値}) / 2$

* 定電圧精度(変動率) = $\frac{\text{変動値}}{\text{定格出力電圧}} \times 100$

Item	Temperature [°C]	Input Voltage [V]	Output Current [A]	Output Voltage [V]	Output Voltage Accuracy [mV]	Output Voltage Accuracy(Ration) [%]
Maximum Voltage	25	72.0	0.00	11.960	±9	±0.1
Minimum Voltage	-20	36.0	0.25	11.943		

COSEL

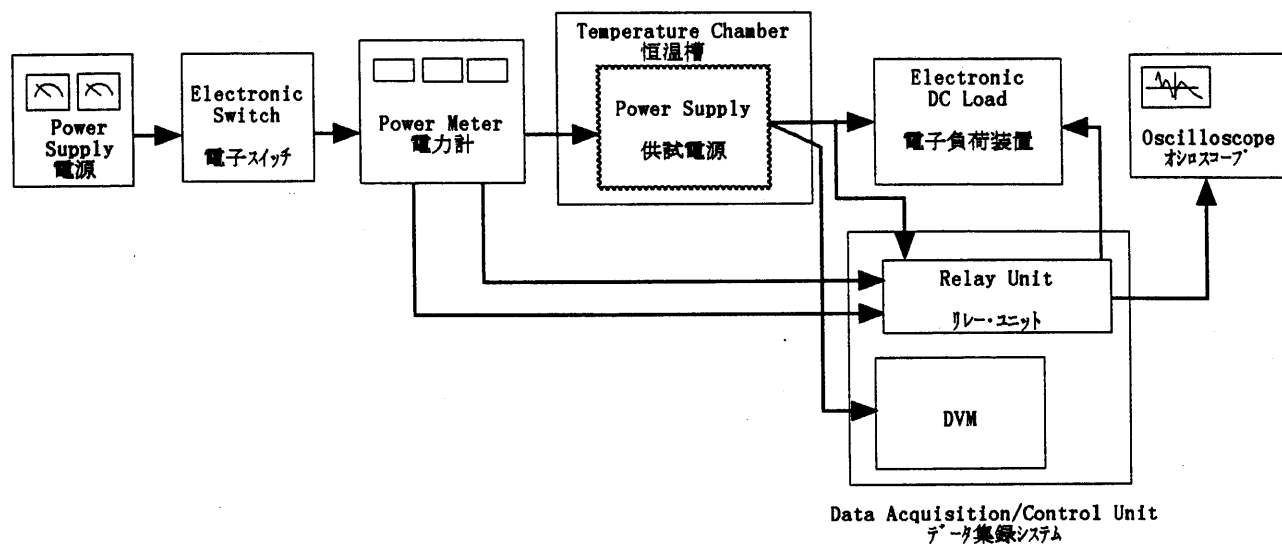


Figure A