

TEST DATA OF MGS154812

Regulated DC Power Supply
September 8, 2010

Approved by : Kazunari Asano
Kazunari Asano Design Manager

Prepared by : Hidetaka Kobayashi
Hidetaka Kobayashi Design Engineer

COSEL CO.,LTD.

CONTENTS

1.Input Current (by Input Voltage)	1
2.Input Current (by Load Current)	2
3.Input Power (by Load Current)	3
4.Efficiency (by Input Voltage)	4
5.Efficiency (by Load Current)	5
6.Line Regulation	6
7.Load Regulation	7
8.Dynamic Load Response	8
9.Ripple Voltage (by Load Current)	9
10.Ripple-Noise	10
11.Ripple Voltage (by Ambient Temperature)	11
12.Ambient Temperature Drift	12
13.Output Voltage Accuracy	13
14.Time Lapse Drift	14
15.Rise and Fall Time	15
16.Minimum Input Voltage for Regulated Output Voltage	16
17.Overcurrent Protection	17
18.Figure of Testing Circuitry	18

(Final Page 18)

Model	MGS154812		
Item	Input Current (by Input Voltage)	Temperature	25°C
Object		Testing Circuitry	Figure A
1.Graph		2.Values	
<div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><div></div><div></div><div></div></div> <div><</div>			

Model	MGS154812																																																					
Item	Input Current (by Load Current)	Temperature	25°C																																																			
Object	_____	Testing Circuitry	Figure A																																																			
1.Graph		2.Values																																																				
<div><div>—△—</div><div>Input Volt.</div><div>36V</div></div> <div><div>---□---</div><div>Input Volt.</div><div>48V</div></div> <div><div>---○---</div><div>Input Volt.</div><div>76V</div></div> <p>Input Current [A]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Current [A]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.00</td><td>0.019</td><td>0.016</td><td>0.013</td></tr><tr><td>0.26</td><td>0.107</td><td>0.082</td><td>0.055</td></tr><tr><td>0.52</td><td>0.199</td><td>0.150</td><td>0.097</td></tr><tr><td>0.78</td><td>0.294</td><td>0.220</td><td>0.141</td></tr><tr><td>1.04</td><td>0.391</td><td>0.292</td><td>0.186</td></tr><tr><td>1.30</td><td>0.492</td><td>0.365</td><td>0.231</td></tr><tr><td>1.43</td><td>0.544</td><td>0.402</td><td>0.254</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.00	0.019	0.016	0.013	0.26	0.107	0.082	0.055	0.52	0.199	0.150	0.097	0.78	0.294	0.220	0.141	1.04	0.391	0.292	0.186	1.30	0.492	0.365	0.231	1.43	0.544	0.402	0.254	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Current [A]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.00	0.019	0.016	0.013																																																			
0.26	0.107	0.082	0.055																																																			
0.52	0.199	0.150	0.097																																																			
0.78	0.294	0.220	0.141																																																			
1.04	0.391	0.292	0.186																																																			
1.30	0.492	0.365	0.231																																																			
1.43	0.544	0.402	0.254																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			

Model	MGS154812																																																					
Item	Input Power (by Load Current)	Temperature	25°C																																																			
Object		Testing Circuitry	Figure A																																																			
1.Graph		2.Values																																																				
<div><div>—△—</div>Input Volt. 36V</div> <div><div>---□---</div>Input Volt. 48V</div> <div><div>-·-○-·-</div>Input Volt. 76V</div> <div>Input Power [W]</div> <div>Load Current [A]</div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Input Power [W]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.00</td><td>0.68</td><td>0.78</td><td>1.02</td></tr><tr><td>0.26</td><td>3.86</td><td>3.95</td><td>4.19</td></tr><tr><td>0.52</td><td>7.16</td><td>7.21</td><td>7.41</td></tr><tr><td>0.78</td><td>10.57</td><td>10.57</td><td>10.76</td></tr><tr><td>1.04</td><td>14.06</td><td>14.00</td><td>14.16</td></tr><tr><td>1.30</td><td>17.69</td><td>17.51</td><td>17.62</td></tr><tr><td>1.43</td><td>19.54</td><td>19.31</td><td>19.37</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Input Power [W]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.00	0.68	0.78	1.02	0.26	3.86	3.95	4.19	0.52	7.16	7.21	7.41	0.78	10.57	10.57	10.76	1.04	14.06	14.00	14.16	1.30	17.69	17.51	17.62	1.43	19.54	19.31	19.37	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Input Power [W]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.00	0.68	0.78	1.02																																																			
0.26	3.86	3.95	4.19																																																			
0.52	7.16	7.21	7.41																																																			
0.78	10.57	10.57	10.76																																																			
1.04	14.06	14.00	14.16																																																			
1.30	17.69	17.51	17.62																																																			
1.43	19.54	19.31	19.37																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

Model	MGS154812																																
Item	Efficiency (by Input Voltage)	Temperature	25°C																														
		Testing Circuitry	Figure A																														
Object																																	
1.Graph		2.Values																															
<div><div><div>---</div><div>□</div><div>---</div></div><div>Load 50%</div></div> <div><div>—</div><div>△</div><div>—</div></div> <div>Load 100%</div> <table><thead><tr><th>Input Voltage [V]</th><th>Load 50% Efficiency [%]</th><th>Load 100% Efficiency [%]</th></tr></thead><tbody><tr><td>34</td><td>88.2</td><td>88.3</td></tr><tr><td>36</td><td>88.3</td><td>88.5</td></tr><tr><td>40</td><td>88.3</td><td>88.9</td></tr><tr><td>48</td><td>88.1</td><td>89.3</td></tr><tr><td>60</td><td>87.5</td><td>89.3</td></tr><tr><td>76</td><td>86.2</td><td>88.8</td></tr><tr><td>80</td><td>85.9</td><td>88.7</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></tbody></table>		Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]	34	88.2	88.3	36	88.3	88.5	40	88.3	88.9	48	88.1	89.3	60	87.5	89.3	76	86.2	88.8	80	85.9	88.7	--	-	-	--	-	-		
Input Voltage [V]	Load 50% Efficiency [%]	Load 100% Efficiency [%]																															
34	88.2	88.3																															
36	88.3	88.5																															
40	88.3	88.9																															
48	88.1	89.3																															
60	87.5	89.3																															
76	86.2	88.8																															
80	85.9	88.7																															
--	-	-																															
--	-	-																															
Note: Slanted line shows the range of the rated input voltage.																																	

Model	MGS154812																																																					
Item	Efficiency (by Load Current)	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	_____																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---□---</div><div>Input Volt.</div><div>48V</div></div><div><div>---○---</div><div>Input Volt.</div><div>76V</div></div></div> <p>Efficiency [%]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Efficiency [%]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.00</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.26</td><td>81.0</td><td>79.2</td><td>74.6</td></tr><tr><td>0.52</td><td>87.4</td><td>86.8</td><td>84.4</td></tr><tr><td>0.78</td><td>88.8</td><td>88.8</td><td>87.3</td></tr><tr><td>1.04</td><td>89.1</td><td>89.5</td><td>88.5</td></tr><tr><td>1.30</td><td>88.5</td><td>89.4</td><td>88.9</td></tr><tr><td>1.43</td><td>88.2</td><td>89.2</td><td>88.9</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Efficiency [%]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.00	-	-	-	0.26	81.0	79.2	74.6	0.52	87.4	86.8	84.4	0.78	88.8	88.8	87.3	1.04	89.1	89.5	88.5	1.30	88.5	89.4	88.9	1.43	88.2	89.2	88.9	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Efficiency [%]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.00	-	-	-																																																			
0.26	81.0	79.2	74.6																																																			
0.52	87.4	86.8	84.4																																																			
0.78	88.8	88.8	87.3																																																			
1.04	89.1	89.5	88.5																																																			
1.30	88.5	89.4	88.9																																																			
1.43	88.2	89.2	88.9																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			


Model	MGS154812	Temperature25°C Testing CircuitryFigure A	
Item	Line Regulation		
Object	+12V1.3A		
1.Graph		2.Values	
<div><div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div><div></div></div></div>			

Model	MGS154812																																																					
Item	Load Regulation	Temperature	25°C																																																			
		Testing Circuitry	Figure A																																																			
Object	+12V1.3A																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---□---</div><div>Input Volt.</div><div>48V</div></div><div><div>-·-○-·-</div><div>Input Volt.</div><div>76V</div></div></div> <p>Output Voltage [V]</p> <p>Load Current [A]</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>0.00</td><td>12.012</td><td>12.012</td><td>12.012</td></tr><tr><td>0.26</td><td>12.012</td><td>12.012</td><td>12.012</td></tr><tr><td>0.52</td><td>12.011</td><td>12.012</td><td>12.012</td></tr><tr><td>0.78</td><td>12.011</td><td>12.011</td><td>12.011</td></tr><tr><td>1.04</td><td>12.011</td><td>12.011</td><td>12.011</td></tr><tr><td>1.30</td><td>12.010</td><td>12.010</td><td>12.011</td></tr><tr><td>1.43</td><td>12.010</td><td>12.010</td><td>12.011</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	0.00	12.012	12.012	12.012	0.26	12.012	12.012	12.012	0.52	12.011	12.012	12.012	0.78	12.011	12.011	12.011	1.04	12.011	12.011	12.011	1.30	12.010	12.010	12.011	1.43	12.010	12.010	12.011	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Load Current [A]	Output Voltage [V]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
0.00	12.012	12.012	12.012																																																			
0.26	12.012	12.012	12.012																																																			
0.52	12.011	12.012	12.012																																																			
0.78	12.011	12.011	12.011																																																			
1.04	12.011	12.011	12.011																																																			
1.30	12.010	12.010	12.011																																																			
1.43	12.010	12.010	12.011																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
Note: Slanted line shows the range of the rated load current.																																																						

COSEL


Model	MGS154812	Temperature 25°C Testing Circuitry Figure A
Item	Dynamic Load Response	
Object	+12V1.3A	

Input Volt. 48 V
Cycle 1000 ms

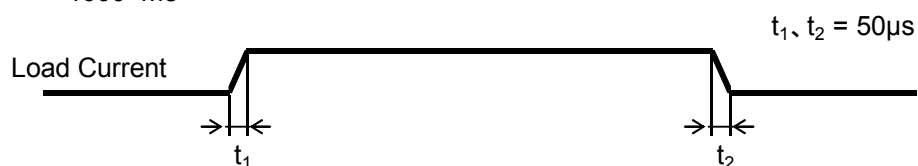


Min. Load (0A) \longleftrightarrow
Load 100% (1.3A)

200mV/div

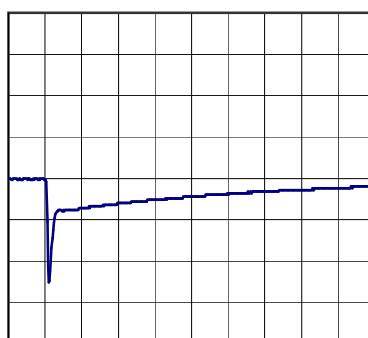


500µs/div

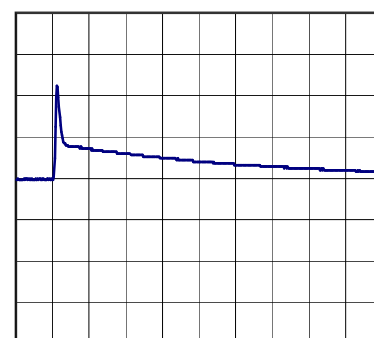


500µs/div

Min. Load (0A) \longleftrightarrow
Load 50% (0.65A)

200mV/div

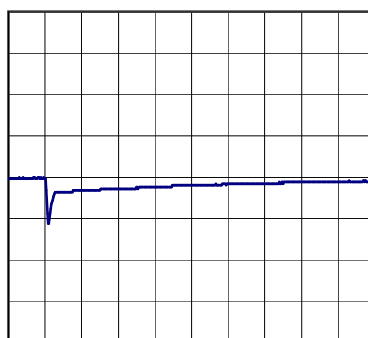


500µs/div

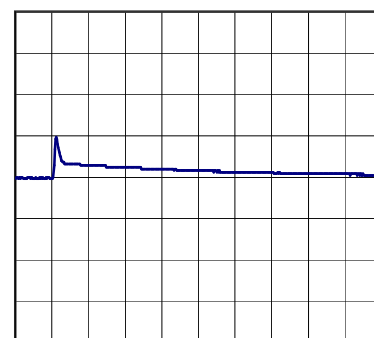


500µs/div

Load 50% (0.65A) \longleftrightarrow
Load 100% (1.3A)

200mV/div

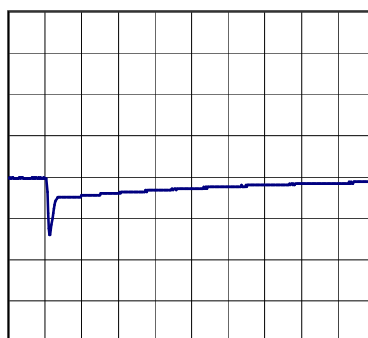

500µs/div

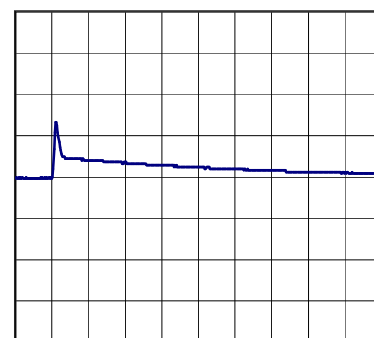

500µs/div

Model		MGS154812																																							
Item		Ripple Voltage (by Load Current)																																							
Object		+12V1.3A																																							
1.Graph		2.Values																																							
<div><div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><div>Input Volt.</div><div>36V</div></div><div><div>Input Volt.</div><div>76V</div></div></div><div><p>Ripple Voltage [mV]</p><p>Load Current [A]</p></div></div>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple Voltage [mV]</th></tr><tr><th>Input Volt. 36 [V]</th><th>Input Volt. 76 [V]</th></tr><tr><td>0.00</td><td>5</td><td>6</td></tr><tr><td>0.26</td><td>5</td><td>7</td></tr><tr><td>0.52</td><td>6</td><td>7</td></tr><tr><td>0.78</td><td>6</td><td>7</td></tr><tr><td>1.04</td><td>7</td><td>8</td></tr><tr><td>1.30</td><td>7</td><td>9</td></tr><tr><td>1.43</td><td>8</td><td>10</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple Voltage [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.00	5	6	0.26	5	7	0.52	6	7	0.78	6	7	1.04	7	8	1.30	7	9	1.43	8	10	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple Voltage [mV]																																								
	Input Volt. 36 [V]	Input Volt. 76 [V]																																							
0.00	5	6																																							
0.26	5	7																																							
0.52	6	7																																							
0.78	6	7																																							
1.04	7	8																																							
1.30	7	9																																							
1.43	8	10																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Measured by 100 MHz Oscilloscope.</p> <p>Ripple Voltage is shown as p-p in the figure below.</p> <p>Note: Slanted line shows the range of the rated load current.</p>																																									
<div><div><div><div></div><div></div></div><div><div></div><div></div></div></div><div><p>Ripple [mVp-p]</p><p>Fig.Complex Ripple Wave Form</p></div></div>																																									

- 9 -

BC-10449

Model	MGS154812																																								
Item	Ripple-Noise	Temperature	25°C																																						
Object	+12V1.3A	Testing Circuitry	Figure B																																						
1.Graph		2.Values																																							
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>- -○- -</div><div>Input Volt.</div><div>76V</div></div></div> <p>Measured by 100 MHz Oscilloscope. Ripple-Noise is shown as p-p in the figure below. Note: Slanted line shows the range of the rated load current.</p>		<table><tr><th rowspan="2">Load Current [A]</th><th colspan="2">Ripple-Noise [mV]</th></tr><tr><th>Input Volt. 36 [V]</th><th>Input Volt. 76 [V]</th></tr><tr><td>0.00</td><td>7</td><td>9</td></tr><tr><td>0.26</td><td>8</td><td>10</td></tr><tr><td>0.52</td><td>8</td><td>10</td></tr><tr><td>0.78</td><td>9</td><td>11</td></tr><tr><td>1.04</td><td>10</td><td>12</td></tr><tr><td>1.30</td><td>11</td><td>12</td></tr><tr><td>1.43</td><td>12</td><td>13</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td></tr></table>		Load Current [A]	Ripple-Noise [mV]		Input Volt. 36 [V]	Input Volt. 76 [V]	0.00	7	9	0.26	8	10	0.52	8	10	0.78	9	11	1.04	10	12	1.30	11	12	1.43	12	13	--	-	-	--	-	-	--	-	-	--	-	-
Load Current [A]	Ripple-Noise [mV]																																								
	Input Volt. 36 [V]	Input Volt. 76 [V]																																							
0.00	7	9																																							
0.26	8	10																																							
0.52	8	10																																							
0.78	9	11																																							
1.04	10	12																																							
1.30	11	12																																							
1.43	12	13																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
--	-	-																																							
<p>Fig.Complex Ripple Noise Wave Form</p>																																									

- 10 -

BC-10449

Model	MGS154812																																																					
Item	Ambient Temperature Drift	Testing Circuitry Figure A																																																				
Object	+12V1.3A																																																					
1.Graph		2.Values																																																				
<div><div><div>—△—</div><div>Input Volt.</div><div>36V</div></div><div><div>---□---</div><div>Input Volt.</div><div>48V</div></div><div><div>---○---</div><div>Input Volt.</div><div>76V</div></div></div> <p>Output Voltage [V]</p> <p>Ambient Temperature [°C]</p> <p>Load 100%</p> <p>Note: Slanted line shows the range of the rated ambient temperature.</p>		<table><tr><th rowspan="2">Ambient Temperature [°C]</th><th colspan="3">Output Voltage [V]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>-60</td><td>11.921</td><td>11.921</td><td>11.922</td></tr><tr><td>-40</td><td>11.952</td><td>11.952</td><td>11.953</td></tr><tr><td>-20</td><td>11.976</td><td>11.976</td><td>11.977</td></tr><tr><td>0</td><td>11.995</td><td>11.995</td><td>11.996</td></tr><tr><td>25</td><td>12.011</td><td>12.012</td><td>12.012</td></tr><tr><td>60</td><td>12.022</td><td>12.022</td><td>12.022</td></tr><tr><td>65</td><td>12.022</td><td>12.022</td><td>12.022</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr><tr><td>--</td><td>-</td><td>-</td><td>-</td></tr></table>		Ambient Temperature [°C]	Output Voltage [V]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	-60	11.921	11.921	11.922	-40	11.952	11.952	11.953	-20	11.976	11.976	11.977	0	11.995	11.995	11.996	25	12.011	12.012	12.012	60	12.022	12.022	12.022	65	12.022	12.022	12.022	--	-	-	-	--	-	-	-	--	-	-	-	--	-	-	-
Ambient Temperature [°C]	Output Voltage [V]																																																					
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																			
-60	11.921	11.921	11.922																																																			
-40	11.952	11.952	11.953																																																			
-20	11.976	11.976	11.977																																																			
0	11.995	11.995	11.996																																																			
25	12.011	12.012	12.012																																																			
60	12.022	12.022	12.022																																																			
65	12.022	12.022	12.022																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			
--	-	-	-																																																			



Model		MGS154812	Testing Circuitry Figure A
Item		Output Voltage Accuracy	
Object		+12V1.3A	

1. Output Voltage Accuracy

This is defined as the value of the output voltage, regulation load, ambient temperature and input voltage varied at random in the range as specified below.

Temperature : -40 - 60°C

Input Voltage : 36 - 76V

Load Current : 0 - 1.3A


* Output Voltage Accuracy = $\pm(\text{Maximum of Output Voltage} - \text{Minimum of Output Voltage}) / 2$


* Output Voltage Accuracy (Ratio) = $\frac{\text{Output Voltage Accuracy}}{\text{Rated Output Voltage}} \times 100$

2. Values

Item	Temperature [°C]	Input Voltage[V]	Output		Output Voltage Accuracy	
			Current[A]	Voltage[V]	Value [mV]	Ratio [%]
Maximum Voltage	60	48	0	12.024	±36	±0.3
Minimum Voltage	-40	36	1.3	11.952		

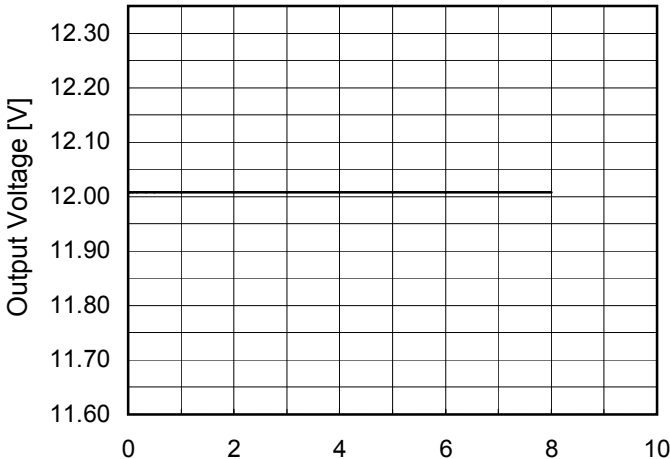

Model	MGS154812																								
Item	Time Lapse Drift	Temperature	25°C																						
		Testing Circuitry	Figure A																						
Object	+12V1.3A																								
1.Graph		2.Values																							
<div><p>Output Voltage [V]</p><p>Time [H]</p><p>Input Volt. 48V</p><p>Load 100%</p></div>		<table><tr><th>Time since start [H]</th><th>Output Voltage [V]</th></tr><tr><td>0.0</td><td>12.008</td></tr><tr><td>0.5</td><td>12.008</td></tr><tr><td>1.0</td><td>12.008</td></tr><tr><td>2.0</td><td>12.008</td></tr><tr><td>3.0</td><td>12.008</td></tr><tr><td>4.0</td><td>12.008</td></tr><tr><td>5.0</td><td>12.008</td></tr><tr><td>6.0</td><td>12.008</td></tr><tr><td>7.0</td><td>12.008</td></tr><tr><td>8.0</td><td>12.008</td></tr></table>		Time since start [H]	Output Voltage [V]	0.0	12.008	0.5	12.008	1.0	12.008	2.0	12.008	3.0	12.008	4.0	12.008	5.0	12.008	6.0	12.008	7.0	12.008	8.0	12.008
Time since start [H]	Output Voltage [V]																								
0.0	12.008																								
0.5	12.008																								
1.0	12.008																								
2.0	12.008																								
3.0	12.008																								
4.0	12.008																								
5.0	12.008																								
6.0	12.008																								
7.0	12.008																								
8.0	12.008																								

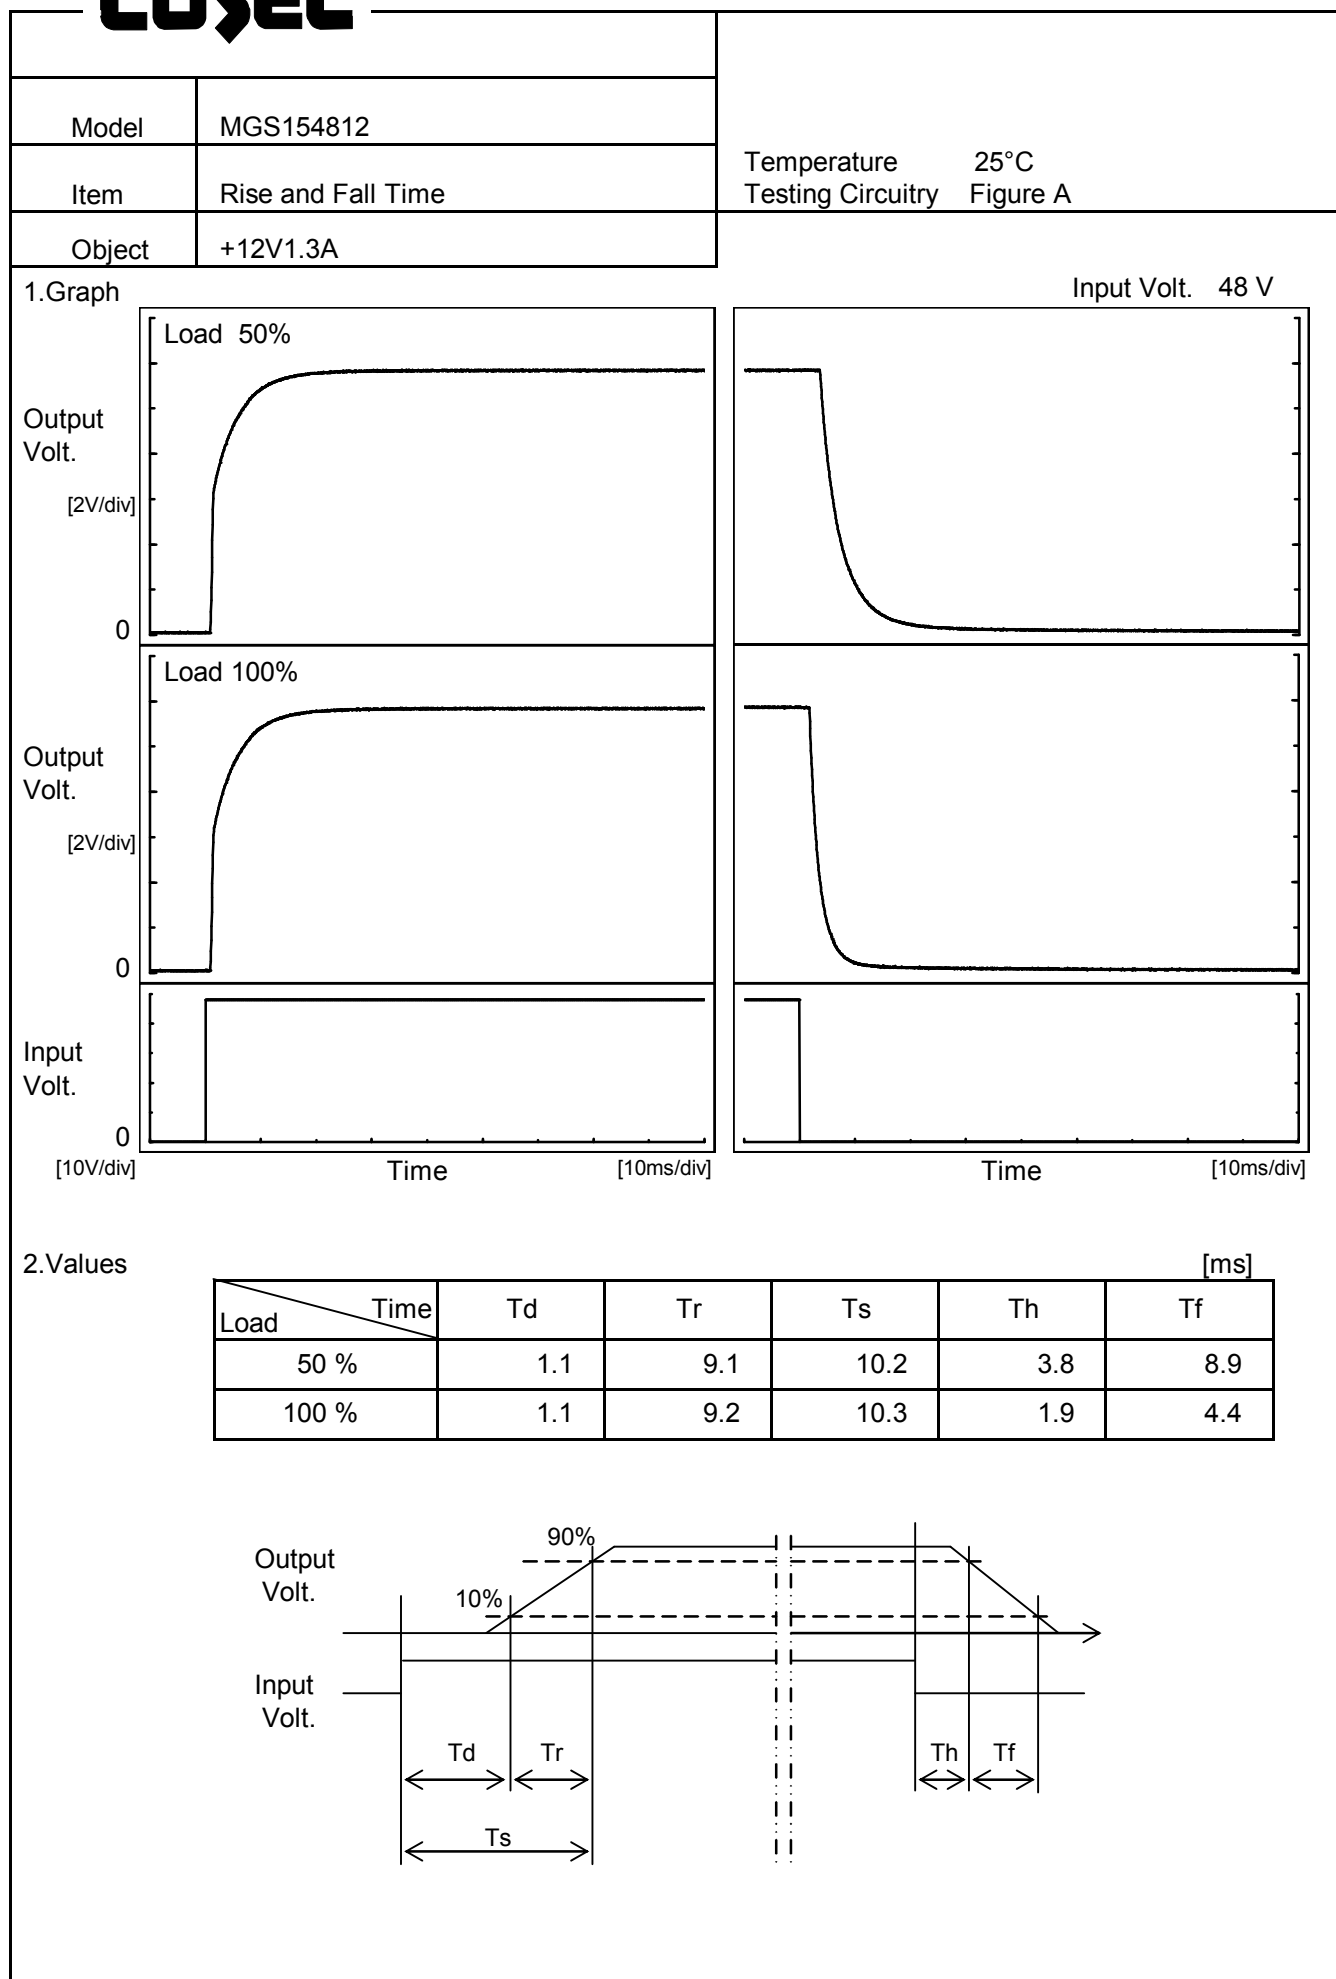

</

Model	MGS154812																																																									
Item	Overcurrent Protection	Temperature	25°C																																																							
Object	+12V1.3A	Testing Circuitry	Figure A																																																							
1.Graph		2.Values																																																								
<div><div><div></div><div>△</div><div>Input Volt.</div><div>36V</div></div><div><div></div><div>□</div><div>Input Volt.</div><div>48V</div></div><div><div></div><div>○</div><div>Input Volt.</div><div>76V</div></div></div> <p>Output Voltage [V]</p> <p>Load Current [A]</p> <p>Note: Slanted line shows the range of the rated load current.</p> <p>Intermittent operation occurs when overcurrent protection is activated.</p>		<table><tr><th rowspan="2">Output Voltage [V]</th><th colspan="3">Load Current [A]</th></tr><tr><th>Input Volt. 36[V]</th><th>Input Volt. 48[V]</th><th>Input Volt. 76[V]</th></tr><tr><td>12.0</td><td>1.50</td><td>1.60</td><td>1.64</td></tr><tr><td>11.4</td><td>-</td><td>-</td><td>-</td></tr><tr><td>10.8</td><td>-</td><td>-</td><td>-</td></tr><tr><td>9.6</td><td>-</td><td>-</td><td>-</td></tr><tr><td>8.4</td><td>-</td><td>-</td><td>-</td></tr><tr><td>7.2</td><td>-</td><td>-</td><td>-</td></tr><tr><td>6.0</td><td>-</td><td>-</td><td>-</td></tr><tr><td>4.8</td><td>-</td><td>-</td><td>-</td></tr><tr><td>3.6</td><td>-</td><td>-</td><td>-</td></tr><tr><td>2.4</td><td>-</td><td>-</td><td>-</td></tr><tr><td>1.2</td><td>-</td><td>-</td><td>-</td></tr><tr><td>0.0</td><td>-</td><td>-</td><td>-</td></tr></table>		Output Voltage [V]	Load Current [A]			Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]	12.0	1.50	1.60	1.64	11.4	-	-	-	10.8	-	-	-	9.6	-	-	-	8.4	-	-	-	7.2	-	-	-	6.0	-	-	-	4.8	-	-	-	3.6	-	-	-	2.4	-	-	-	1.2	-	-	-	0.0	-	-	-
Output Voltage [V]	Load Current [A]																																																									
	Input Volt. 36[V]	Input Volt. 48[V]	Input Volt. 76[V]																																																							
12.0	1.50	1.60	1.64																																																							
11.4	-	-	-																																																							
10.8	-	-	-																																																							
9.6	-	-	-																																																							
8.4	-	-	-																																																							
7.2	-	-	-																																																							
6.0	-	-	-																																																							
4.8	-	-	-																																																							
3.6	-	-	-																																																							
2.4	-	-	-																																																							
1.2	-	-	-																																																							
0.0	-	-	-																																																							

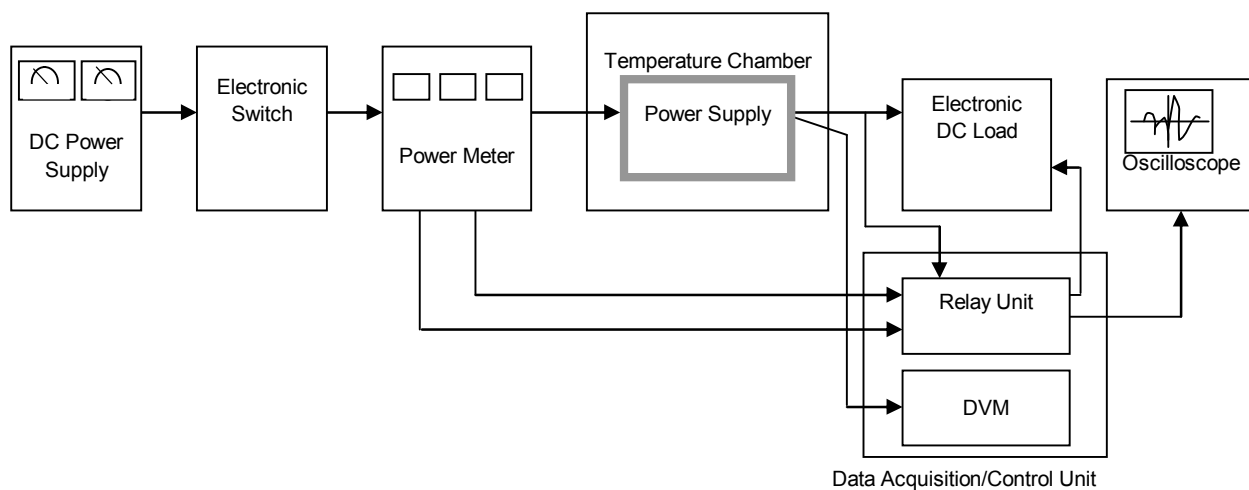


Figure A

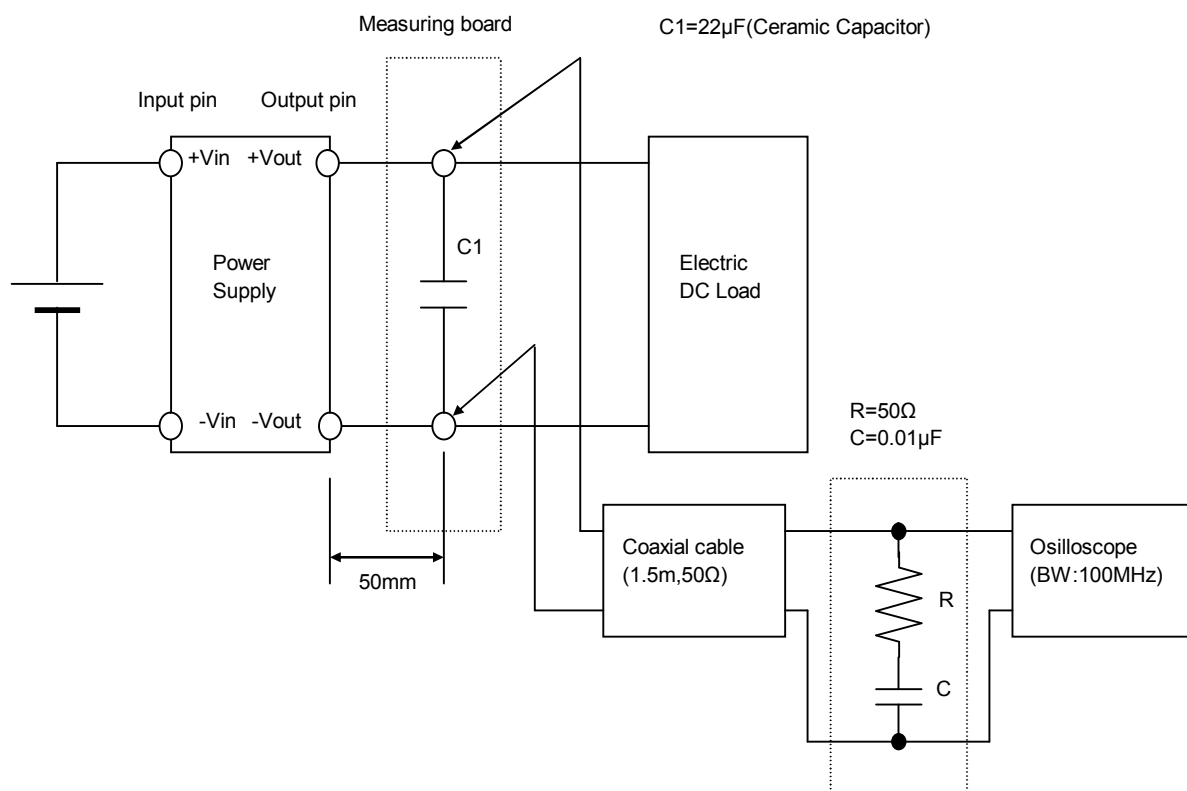


Figure B (Ripple and Ripple noise Characteristic)