

Model TUHS3F12


Item Switching Frequency

Temperature 25°C  
Testing Circuitry Figure A


Object \_\_\_\_\_

### 1.Graph

Input Voltage : AC100V

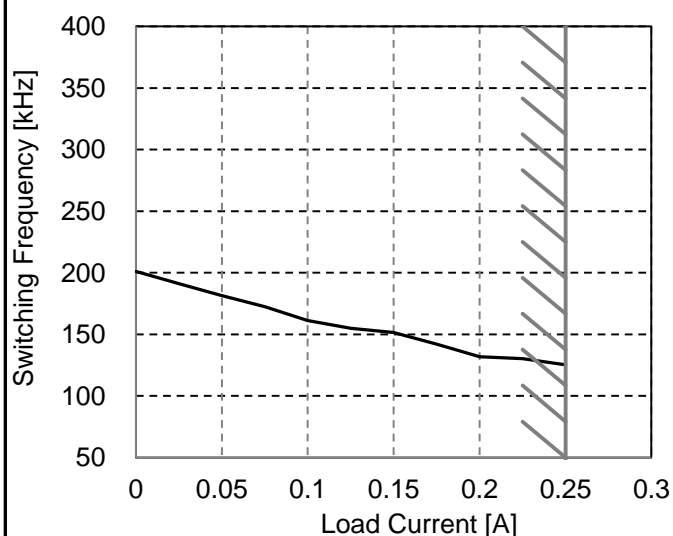

Input Voltage : AC200V

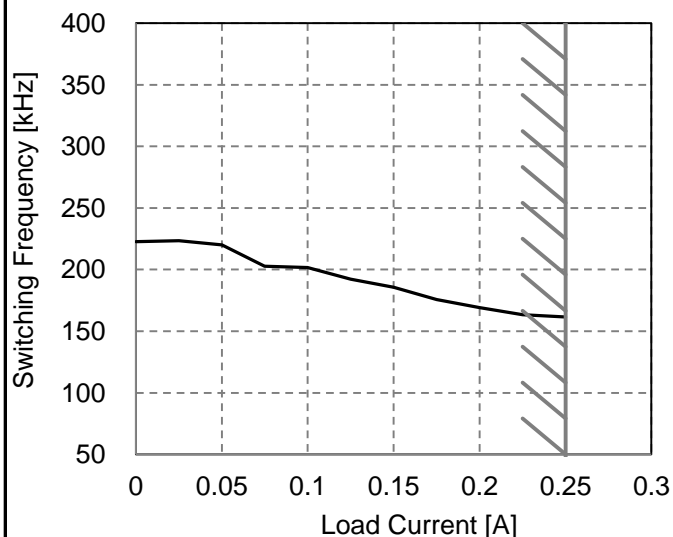

### 2.Values

Load Current [A]	Switching Frequency [kHz]
0.00	201
0.03	191
0.05	181
0.08	172
0.10	161
0.13	155
0.15	152
0.18	142
0.20	132
0.23	130
0.25	125

Load Current [A]	Switching Frequency [kHz]
0.00	223
0.03	223
0.05	220
0.08	203
0.10	202
0.13	192
0.15	186
0.18	176
0.20	169
0.23	163
0.25	162

-Switching frequency of TUHS changes depending on load current and input voltage.

-When load current is low, TUHS operates intermittently, so switching frequency would not become constant.