



## ***EXTRA TEST DATA OF LFA15F-15***

*Regulated DC Power Supply  
Jul, 27, 2020*




**COSEL CO.,LTD.**

## CONTENTS




1.Inrush Current (enlargement) . . . . .	1
2.Dynamic Line Regulation . . . . .	2
3.Overvoltage Protection (waveform) . . . . .	3
4.Hiccup cycle (by Overcurrent Protection) . . . . .	4
5.Figure of Testing Circuitry . . . . .	5

(Final Page 5)

Model	LFA15F-15	Temperature	25°C
Item	Inrush Current (enlargement)	Testing Circuitry	A
Object	_____		

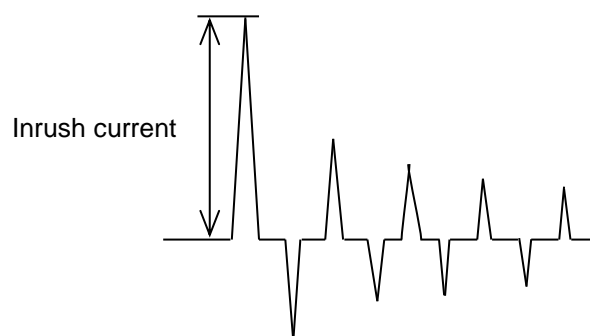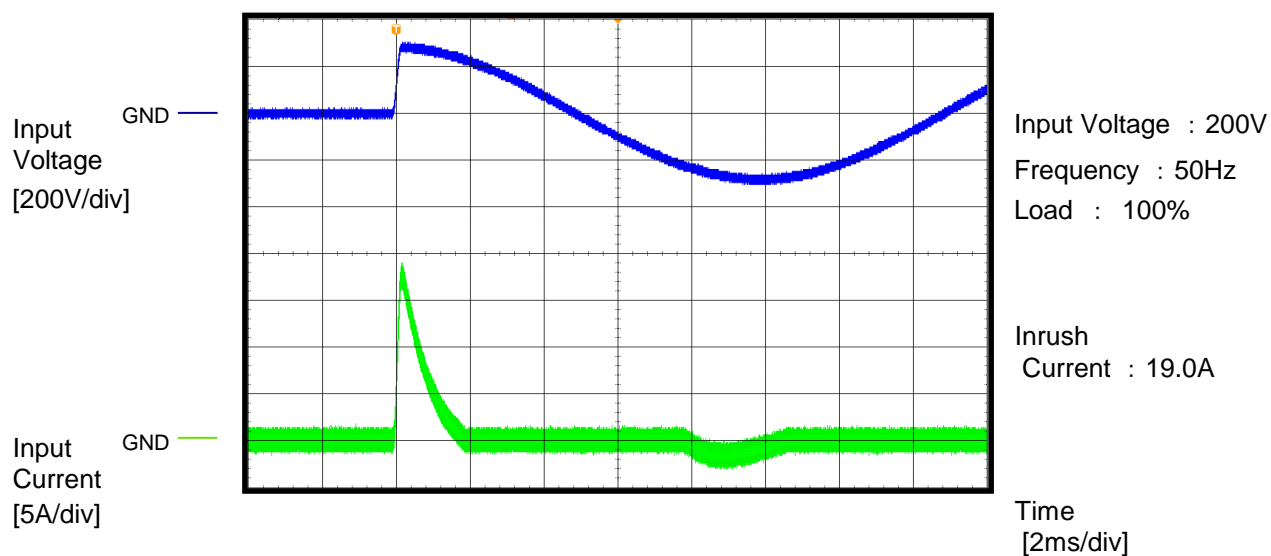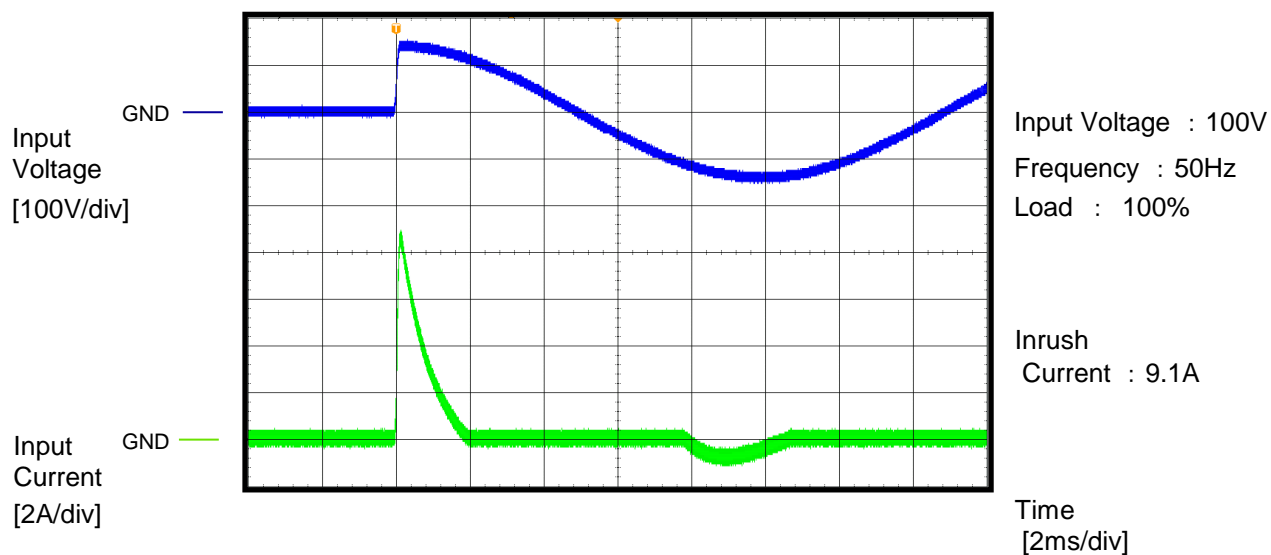


Model	LFA15F-15	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

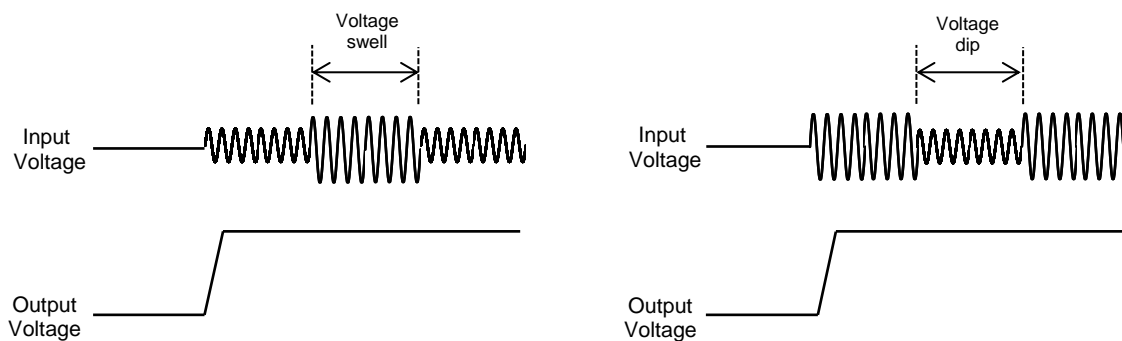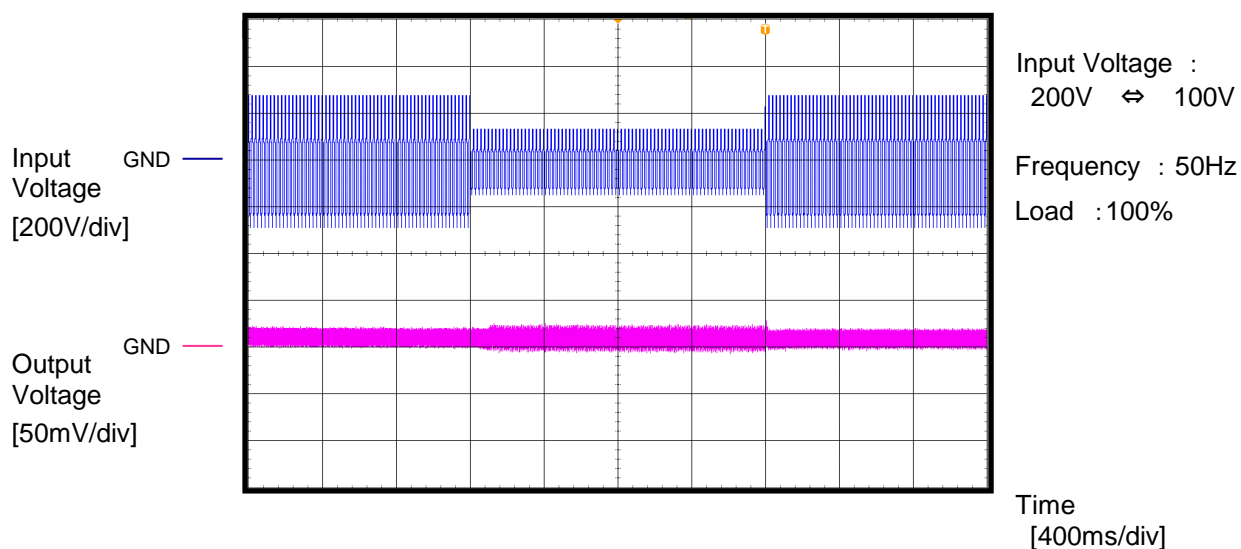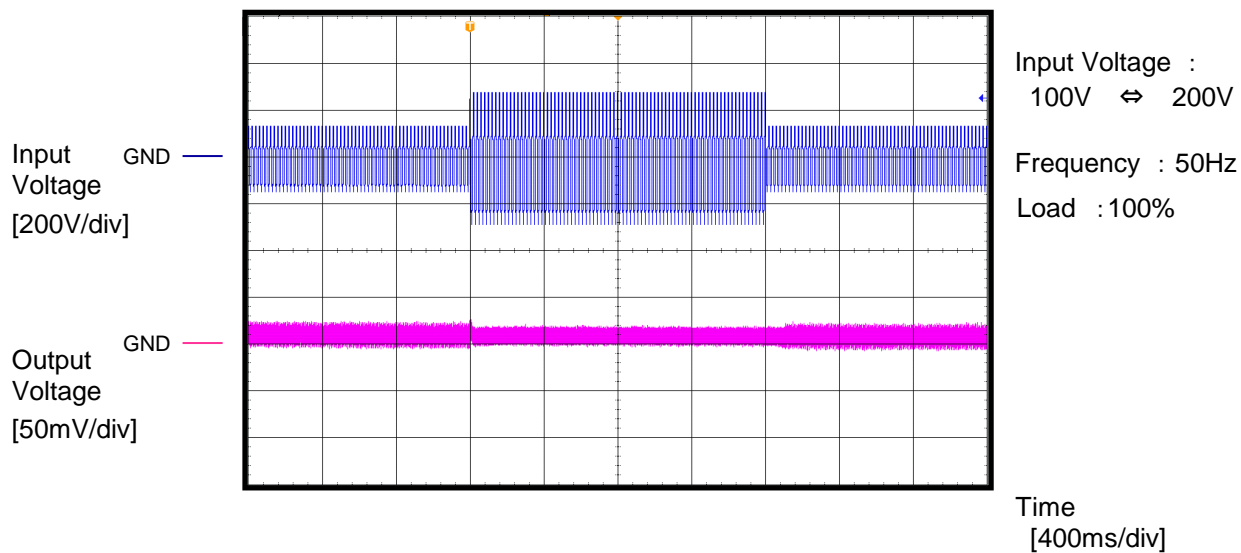

Model	LFA15F-15	Temperature	25°C
Item	Over Voltage Protection	Testing Circuitry	A
Object		Input Voltage : 100V	


Output  
Voltage  
[5V/div]

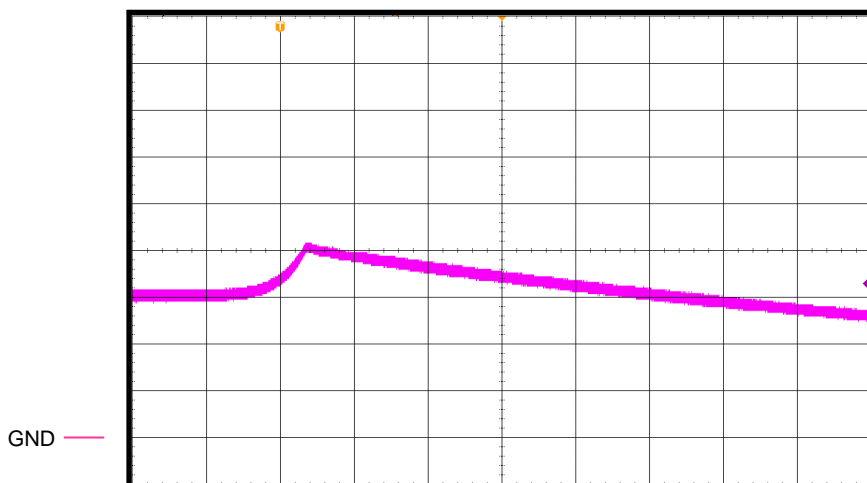

Load : 0%  
Overvoltage protection  
value : 20.8V


Time  
[40ms/div]

Output  
Voltage  
[5V/div]

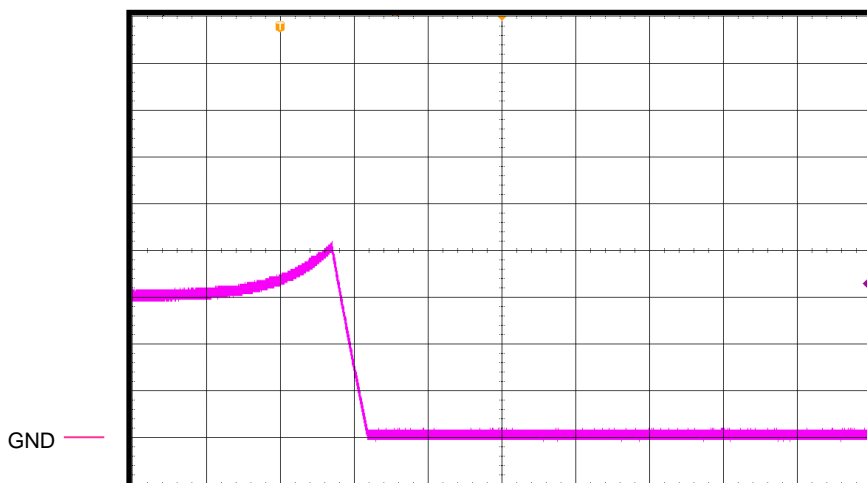


Load : 100%  
Overvoltage protection  
value : 21V

Time  
[20ms/div]

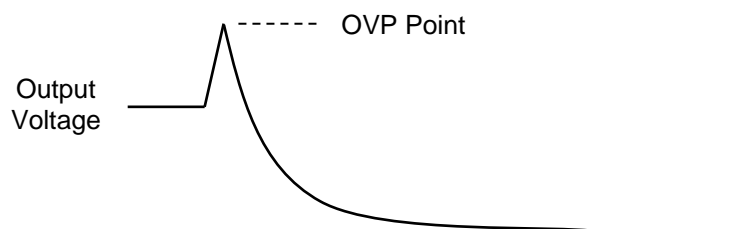

Model	LFA15F-15	Temperature	25°C
Item	Short Circuit Current	Testing Circuitry	A
Object		Load	: Short

Output  
Current  
[1A/div]

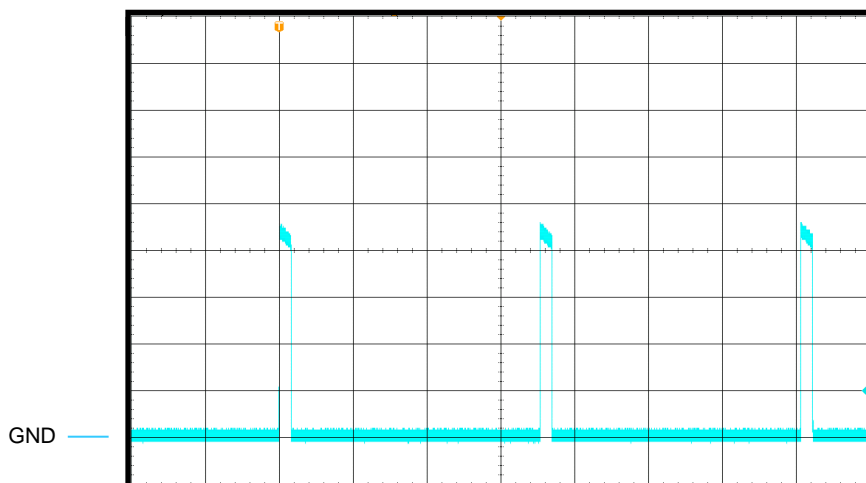

Input Voltage : 100V


Short-circuit  
current : 4.6A

ON Time : 32ms

Hiccup mode  
time : 706ms

Time  
[200ms/div]

Output  
Current  
[1A/div]

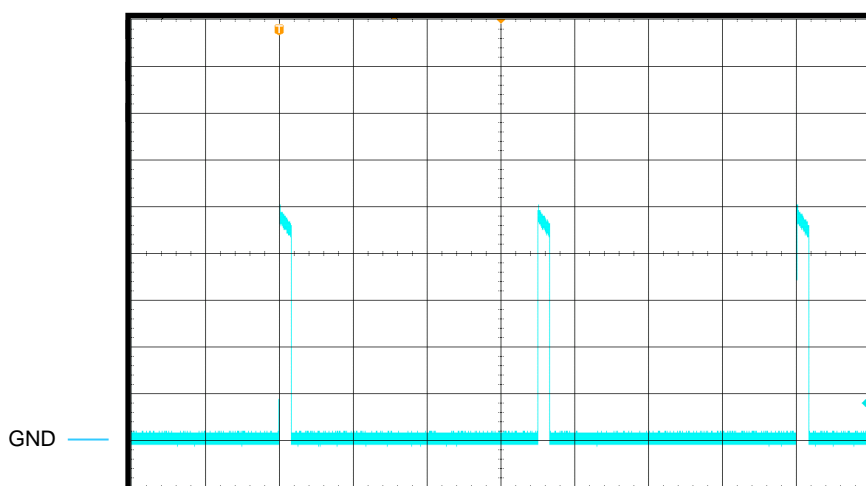


Input Voltage : 200V

Short-circuit  
current : 5A

ON Time : 32ms

Hiccup mode  
time : 701ms

Time  
[200ms/div]

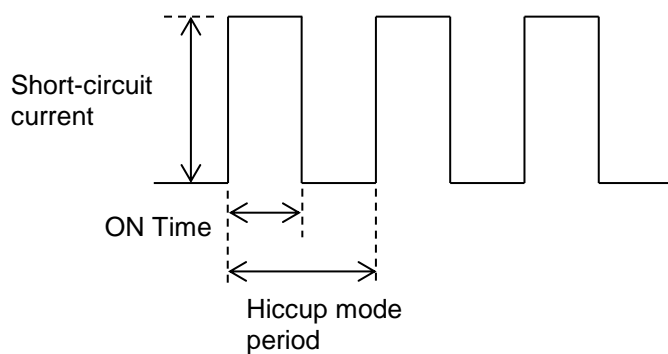

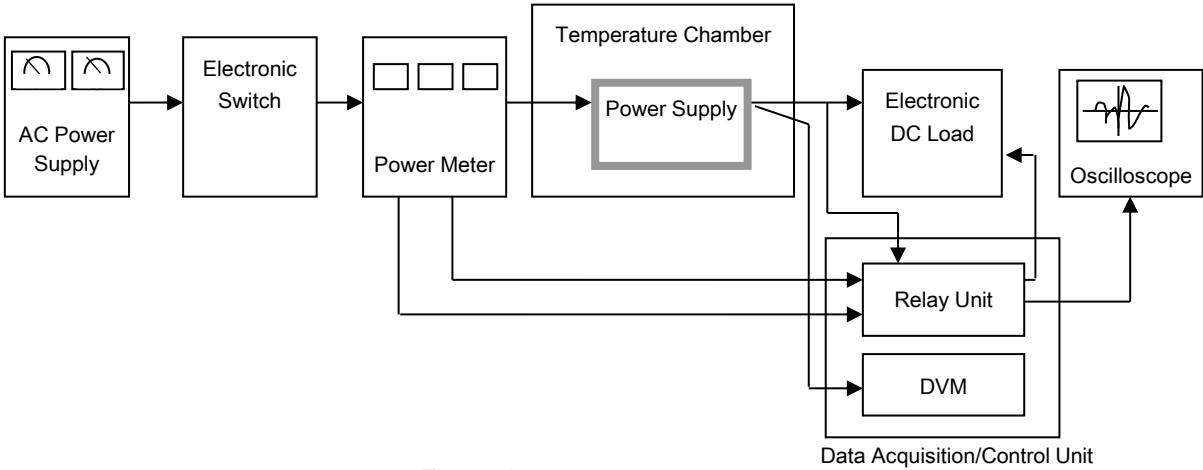


Figure A