



## ***EXTRA TEST DATA OF LHA15F-3R3-Y***

*Regulated DC Power Supply  
Aug, 20, 2022*

**COSEL CO.,LTD.**



## CONTENTS

1.Inrush Current (enlargement) . . . . .	1
2.Dynamic Line Regulation . . . . .	2
3.Overtoltage Protection (waveform) . . . . .	3
4.Hiccup cycle (by Overcurrent Protection) . . . . .	4
5.Figure of Testing Circuitry . . . . .	5

(Final Page 5)

**COSEL**

Model	LHA15F-3R3-Y		
Item	Inrush Current (enlargement)	Temperature	25°C
Object		Testing Circuitry	A

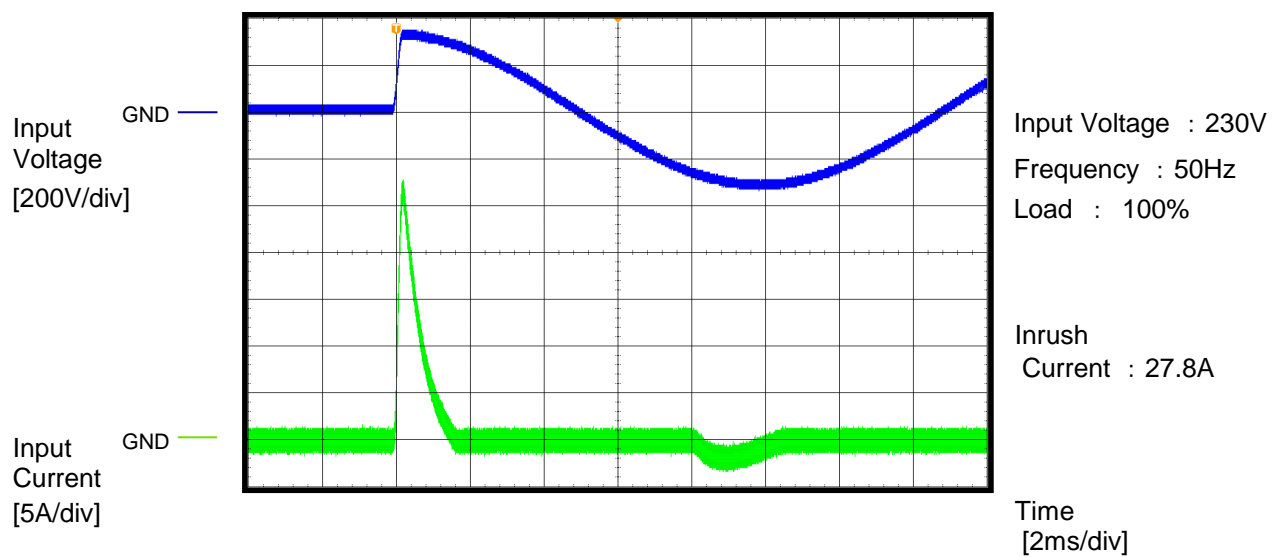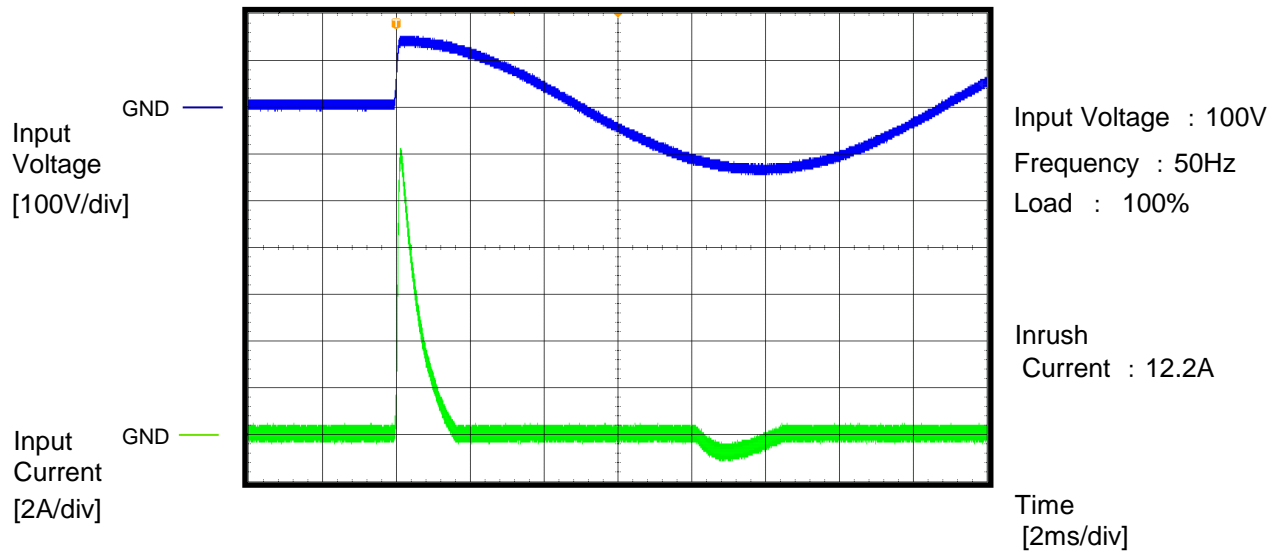


**COSEL**

Model	LHA15F-3R3-Y	Temperature    25°C Testing Circuitry   A	
Item	Dynamic Line Regulation		
Object	_____		

Input Voltage  
[200V/div]

Output Voltage  
[50mV/div]

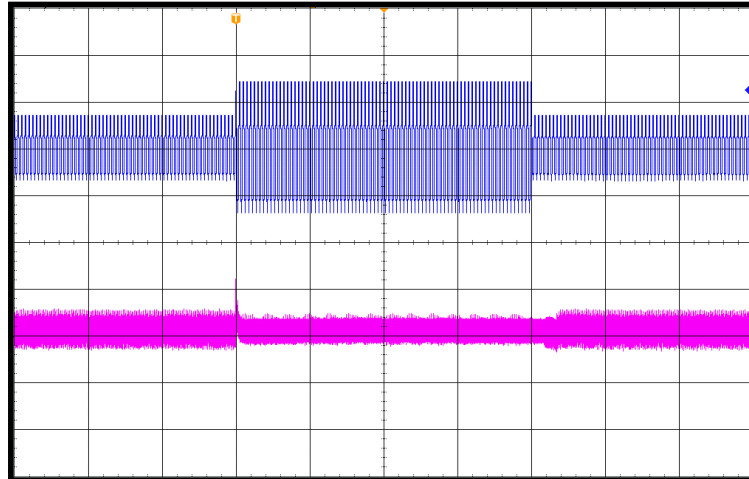


Input Voltage :  
100V  $\Leftrightarrow$  230V

Frequency : 50Hz  
Load : 100%

Time  
[400ms/div]

Input Voltage  
[200V/div]



Output Voltage  
[50mV/div]

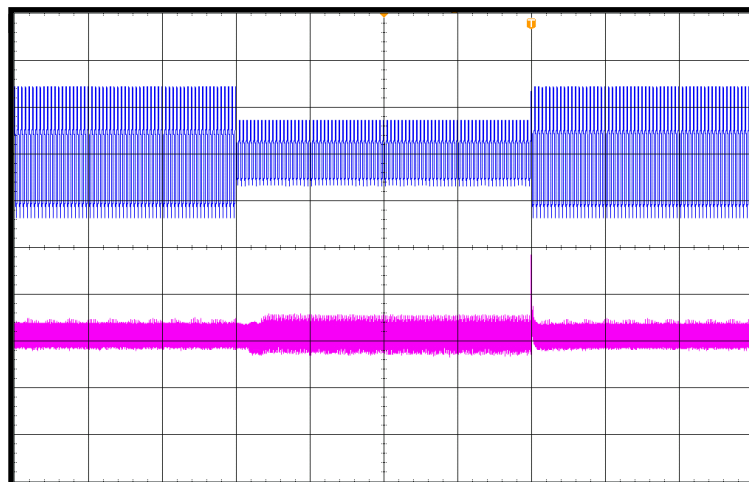

Input Voltage :  
230V  $\Leftrightarrow$  100V

Frequency : 50Hz  
Load : 100%

Time  
[400ms/div]

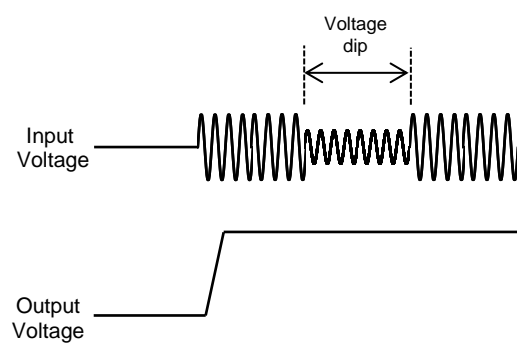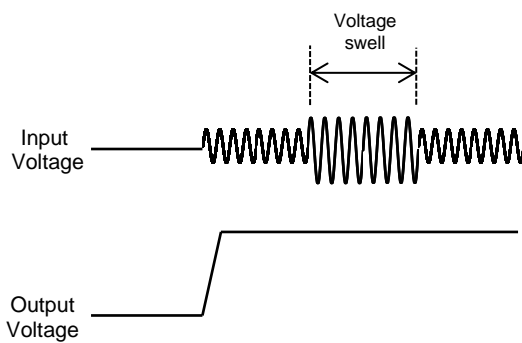


**COSEL**

Model	LHA15F-3R3-Y	Temperature	25°C
Item	Over Voltage Protection	Testing Circuitry	A
Object	_____	Input Voltage : 100V	

Output Voltage  
[1V/div]

GND

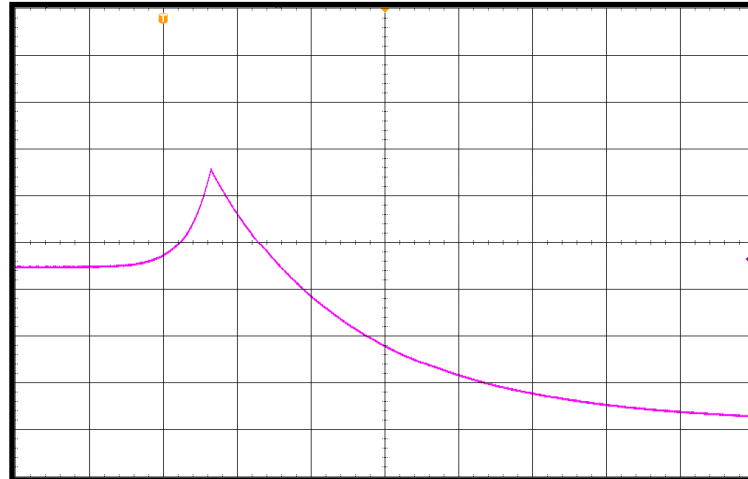


Load : 0%

Overvoltage protection  
value : 5.6V

Time  
[40ms/div]

Output Voltage  
[1V/div]


GND

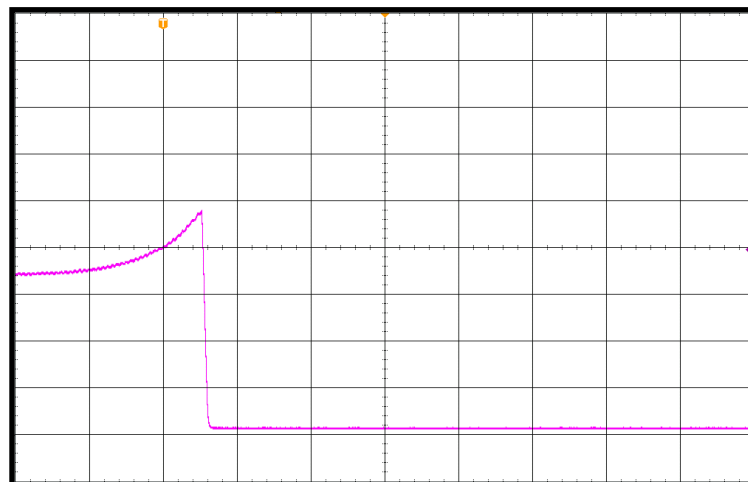

Load : 100%


Overvoltage protection  
value : 4.8V

Time  
[20ms/div]

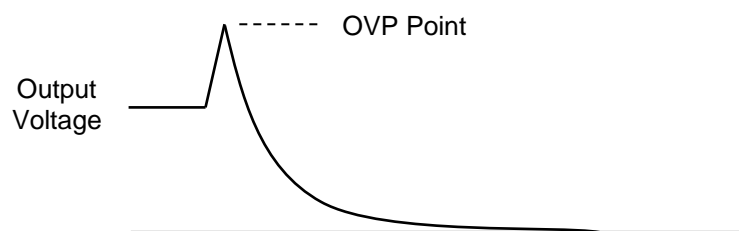

Model	LHA15F-3R3-Y	Temperature	25°C
Item	Hiccup cycle (by Overcurrent Protection)	Testing Circuitry	A
Object		Load	: Short

Output  
Current  
[1A/div]

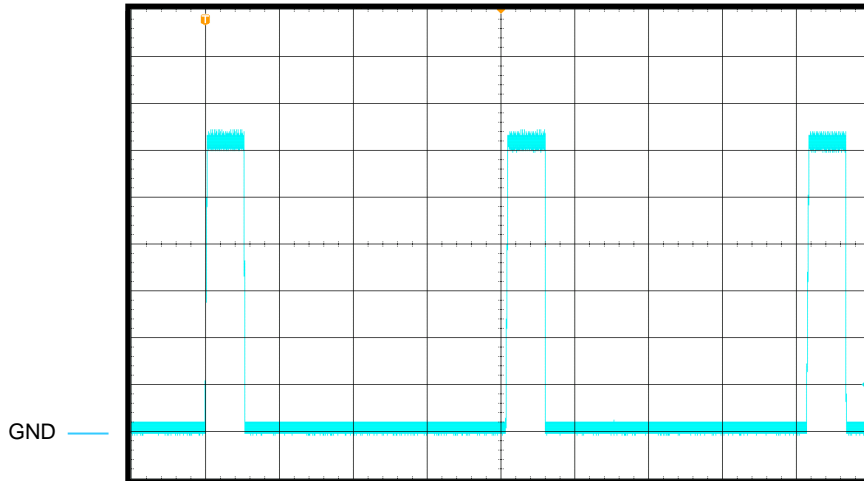

Input Voltage : 100V


Short-circuit  
current : 6.4A

ON Time : 208ms

Hiccup mode  
time : 1630ms

Time  
[400ms/div]

Output  
Current  
[1A/div]

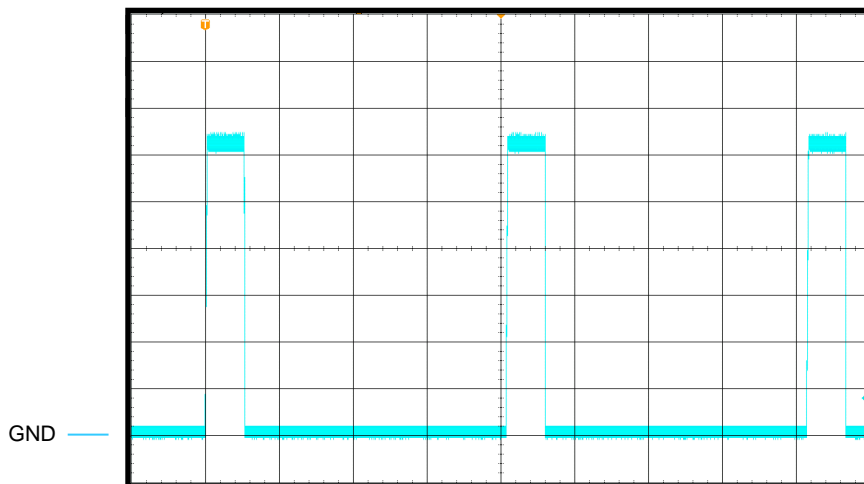

Input Voltage : 230V

Short-circuit  
current : 6.5A

ON Time : 208ms

Hiccup mode  
time : 1629ms

Time  
[400ms/div]

