



# ***EXTRA TEST DATA OF PDA15F-24***

*Regulated DC Power Supply  
Apr, 20, 2024*

**COSEL CO.,LTD.**



## CONTENTS

1.Inrush Current (enlargement) . . . . .	1
2.Dynamic Line Regulation . . . . .	2
3.Hiccup cycle (by Overcurrent Protection) . . . . .	3
4.Figure of Testing Circuitry . . . . .	4

(Final Page 4)




**COSEL**

Model	PDA15F-24		
Item	Inrush Current (enlargement)	Temperature	25°C
Object		Testing Circuitry	A

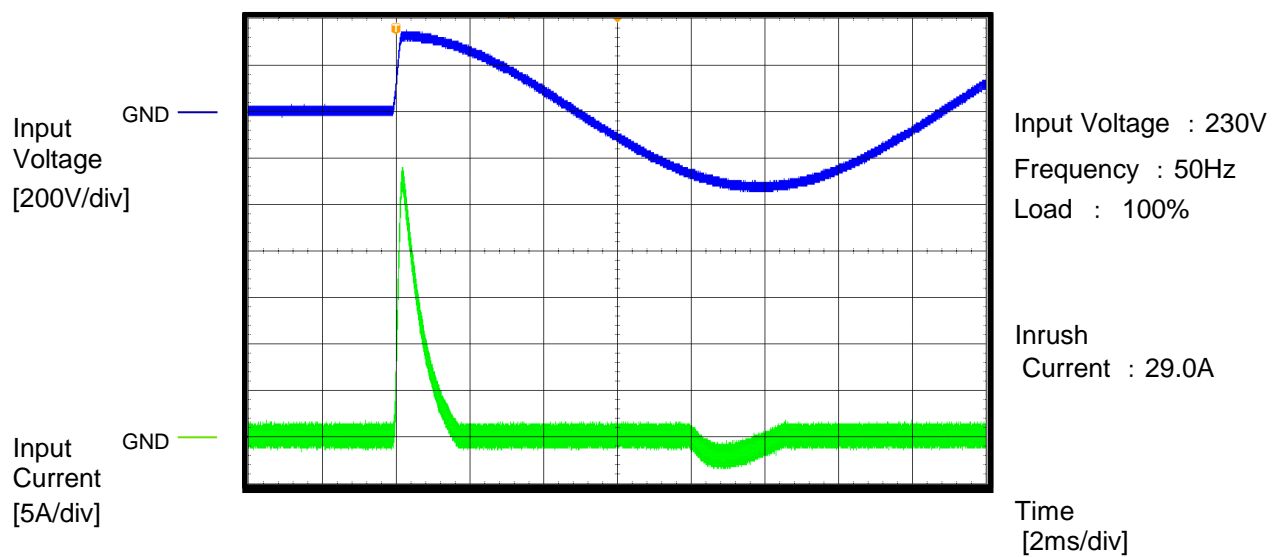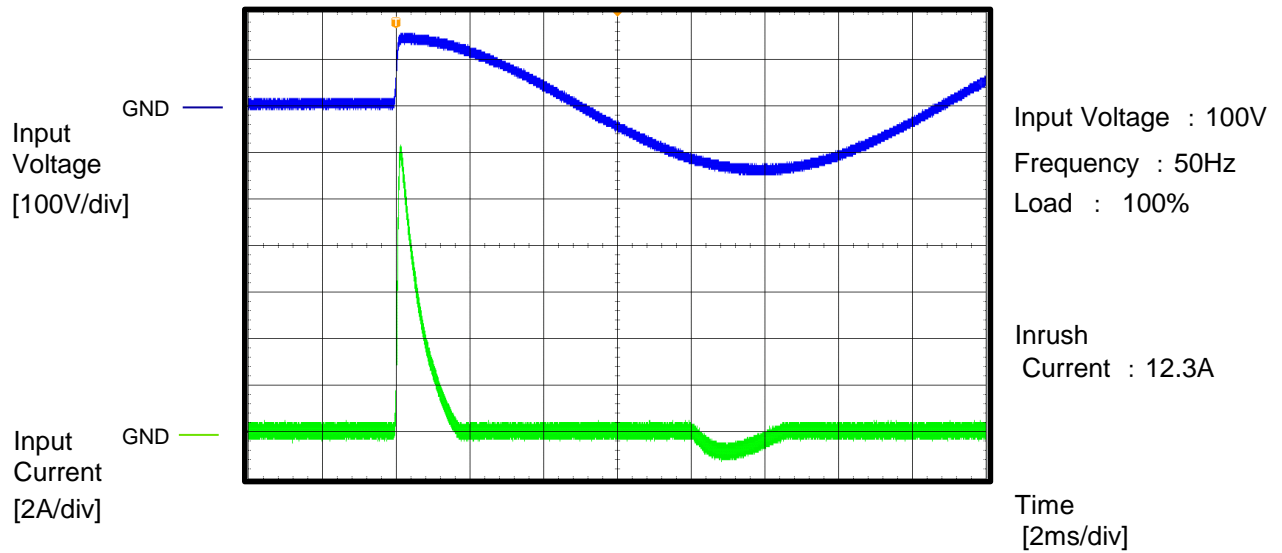


**COSEL**

Model	PDA15F-24	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

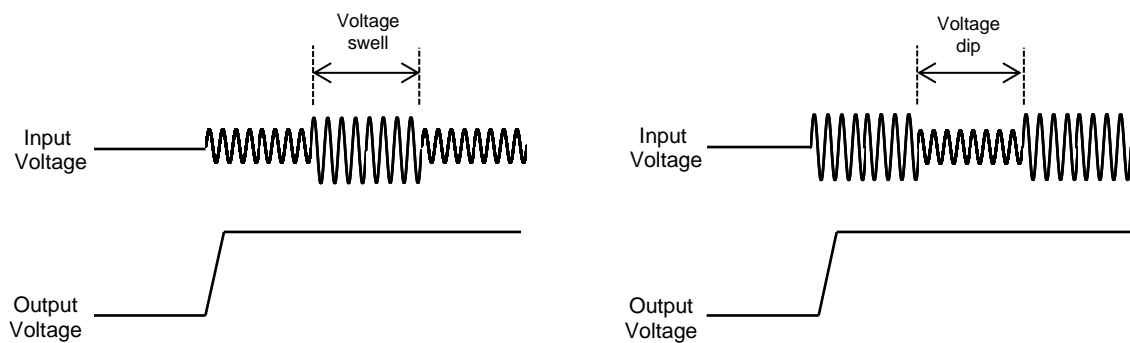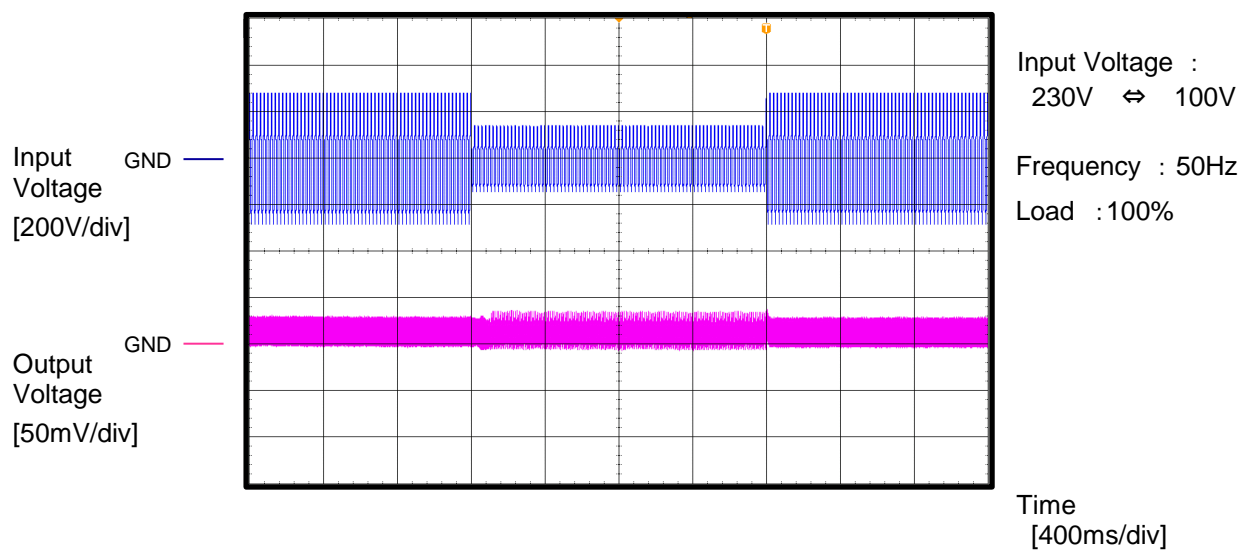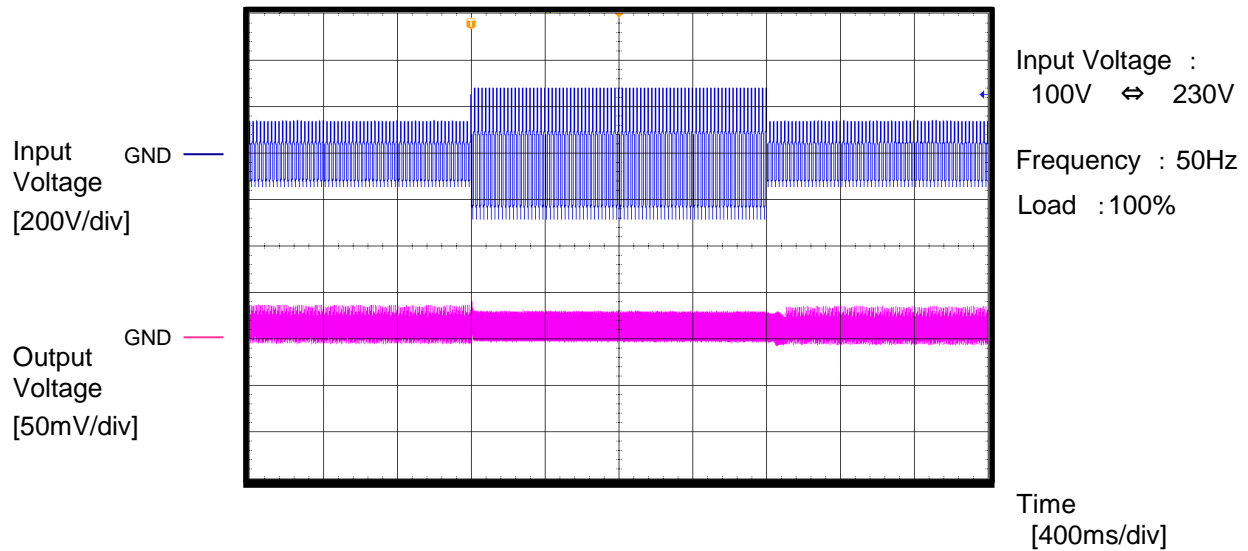

**COSEL**


Model	PDA15F-24	Temperature	25°C
Item	Hiccup cycle (by Overcurrent Protection)	Testing Circuitry	A
Object	_____	Load	: Short

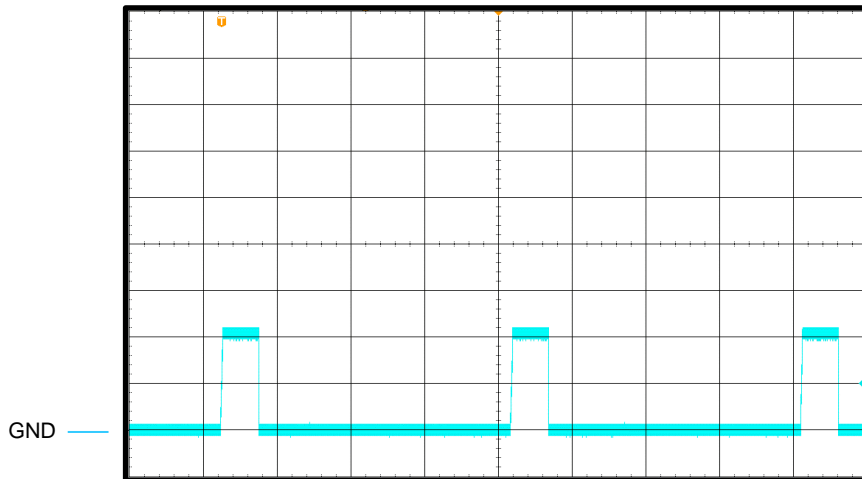Output Current  
[1A/div]

Input Voltage : 100V

Short-circuit  
current : 2.2A

ON Time : 202ms

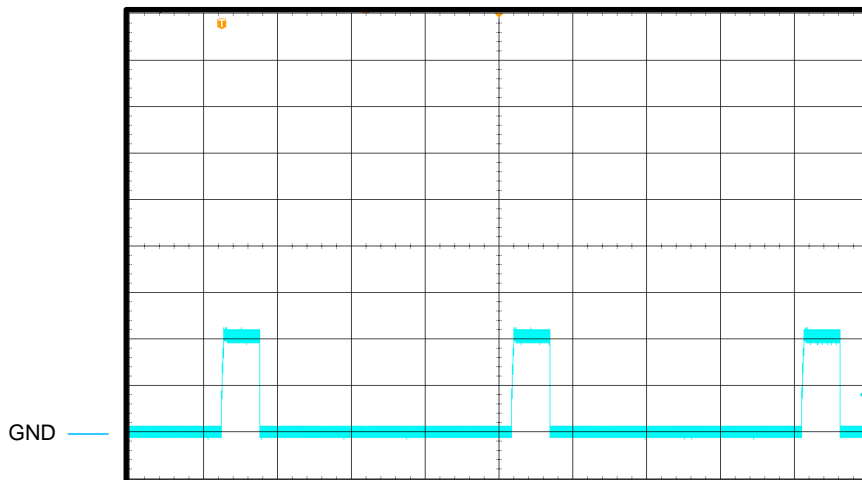Hiccup mode  
time : 1573msTime  
[400ms/div]Output Current  
[1A/div]

Input Voltage : 230V

Short-circuit  
current : 2.2A

ON Time : 205ms

Hiccup mode  
time : 1572msTime  
[400ms/div]