

\*\*\*\*\*<I P S Corporation>\*\*\*\*\*  
 <<< RADIATED EMISSION >>>

24 April, 1997 16:44

Page 1

Model : COSEL LDA300W-24  
 Serial No. : 001  
 Standard : EN55022 Class B  
 Condition File : 104  
 Condition :  
 Remarks : EUT NAME : POWER SUPPLY

: FILE No. : 001  
 AC Power : 230 V 50 Hz  
 Temperature : 19 deg.  
 Humidity : 51 %  
 Operator : T.YAMAGUCHI

\*\*\*\*\*  
 ----- Final Result -----

- Horizontal Polarization -

No.	Frequency [MHz]	Reading [dBuV]	c.f. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1	30.120	21.0	-4.2	16.8	30.0	13.2
2	57.058	25.4	-16.3	9.1	30.0	20.9
3	64.279	24.9	-16.2	8.7	30.0	21.3
4	93.031	21.9	-12.7	9.2	30.0	20.8
5	136.076	22.8	-9.4	13.4	30.0	16.6
6	166.650	21.4	-10.4	11.0	30.0	19.0

- Vertical Polarization -

No.	Frequency [MHz]	Reading [dBuV]	c.f. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
7	30.119	29.0	-4.2	24.8	30.0	5.2
8	48.652	25.0	-13.6	11.4	30.0	18.6
9	54.960	30.4	-16.2	14.2	30.0	15.8
10	65.726	32.2	-16.2	16.0	30.0	14.0
11	93.217	26.1	-12.7	13.4	30.0	16.6
12	152.094	25.6	-9.8	15.8	30.0	14.2

&lt; I P S Corporation &gt;

&lt;&lt; RADIATED EMISSION &gt;&gt;&gt;


Date/Time : 24 April, 1997 16:44





I P S EMC SITE





Model : COSEL LDA300W-24  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY





Standard : EN55022 Class B  
Operator : T. YAMAGUCHI





FILE No. : 001

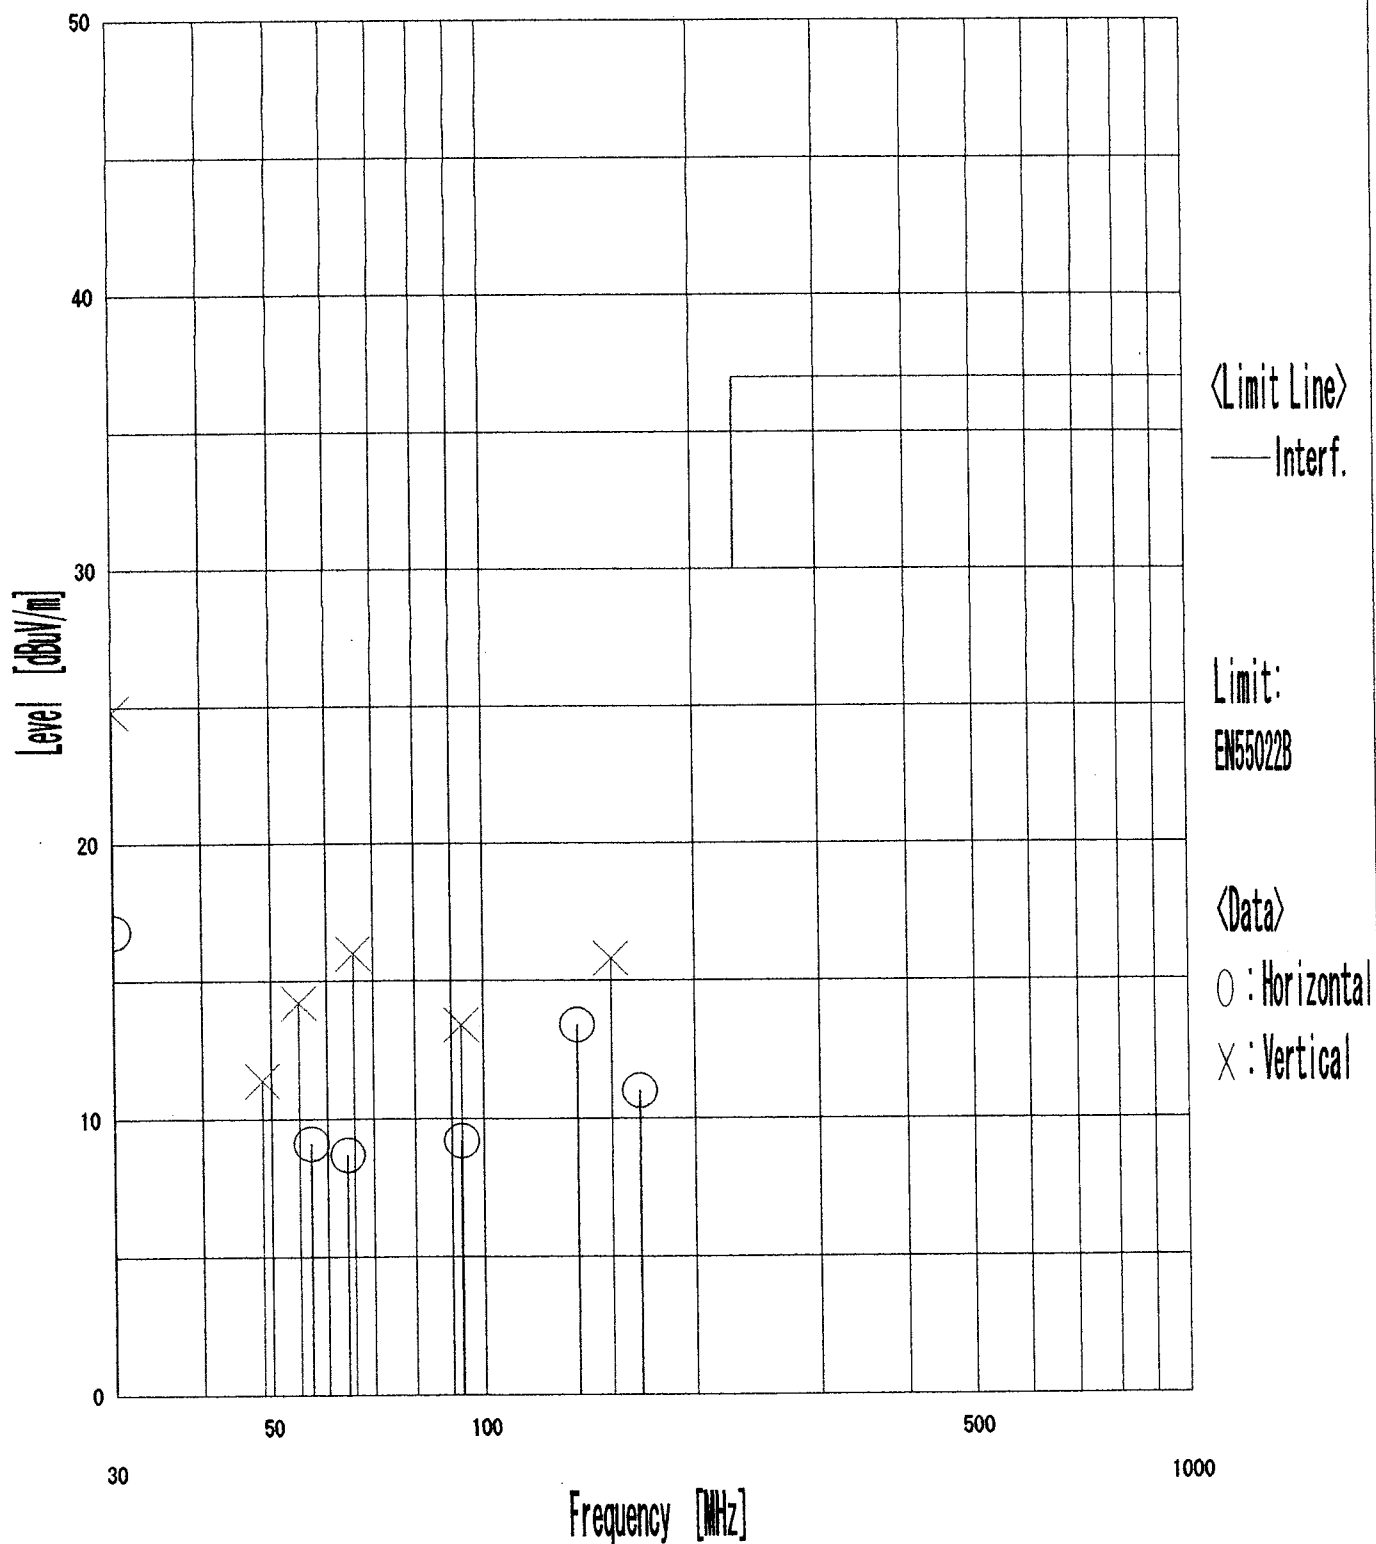

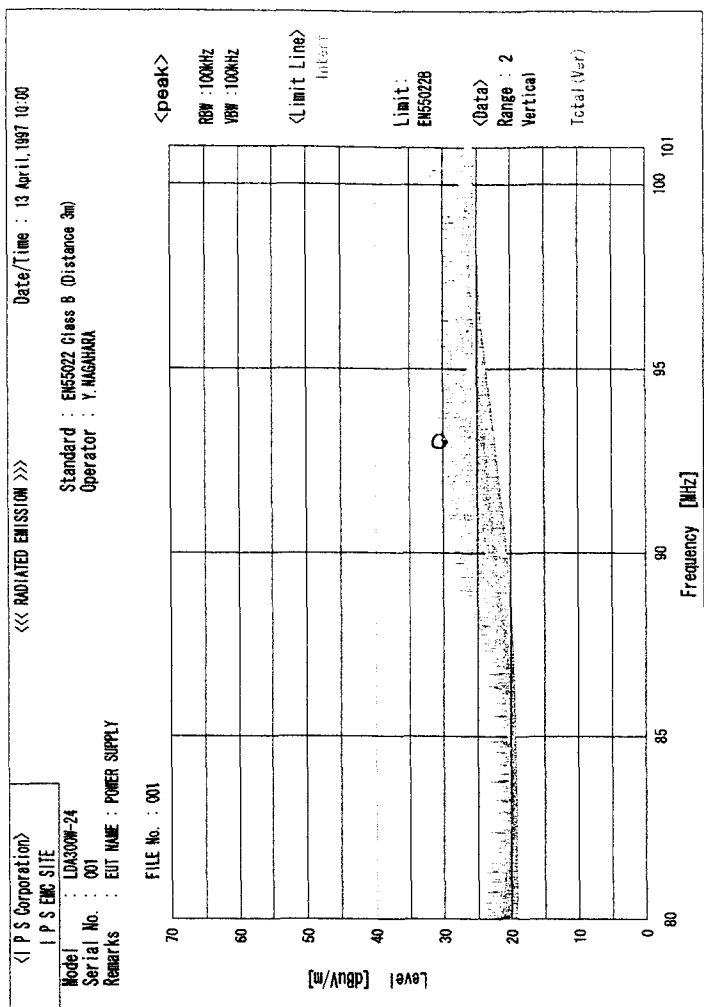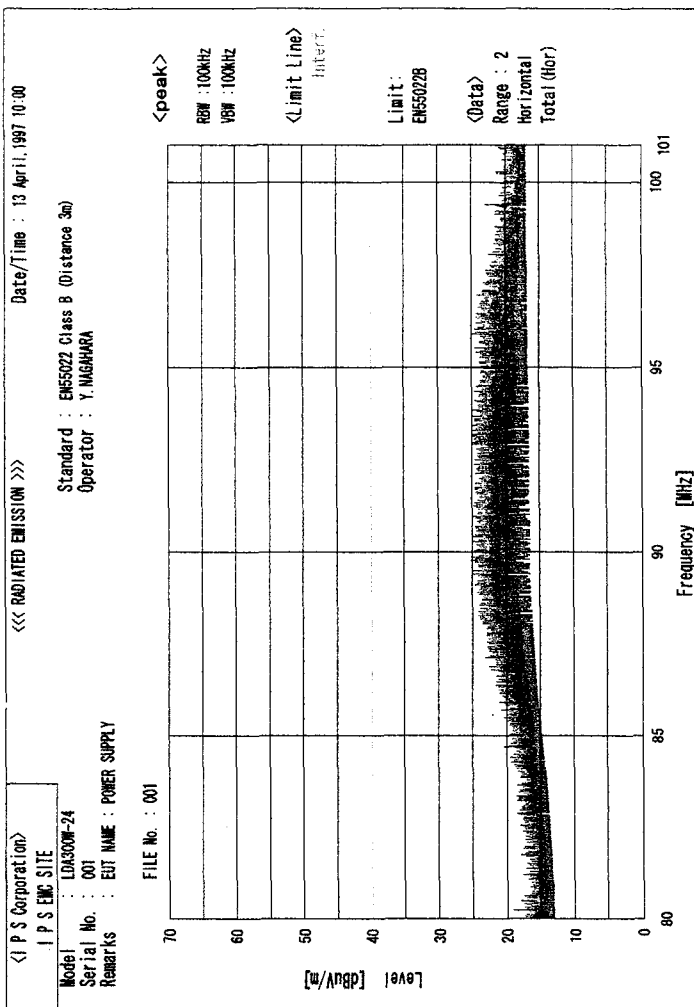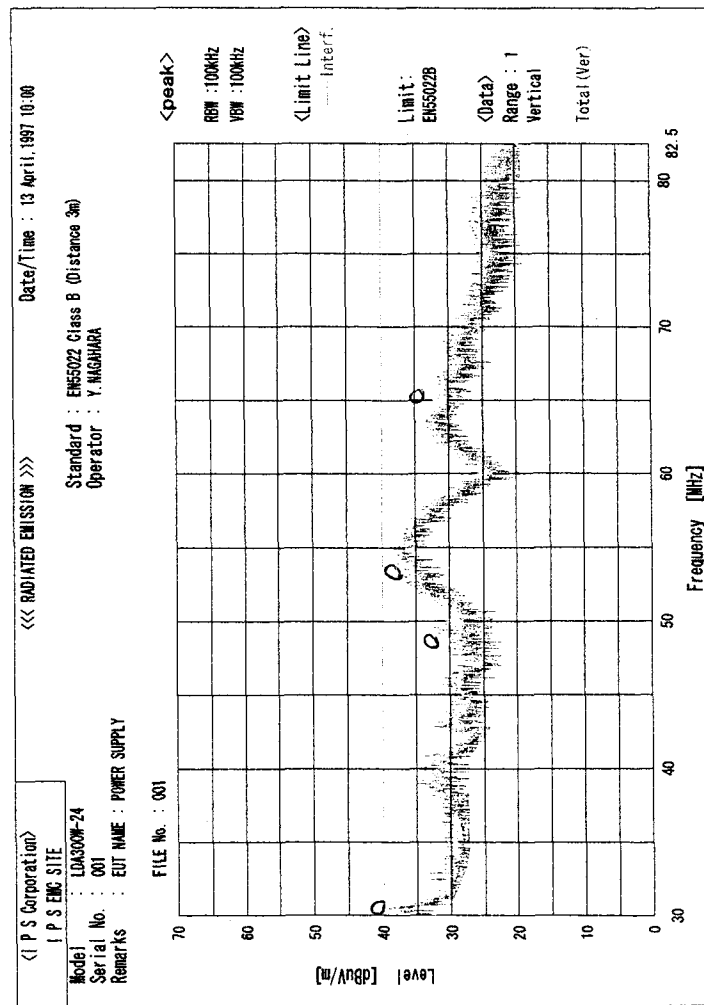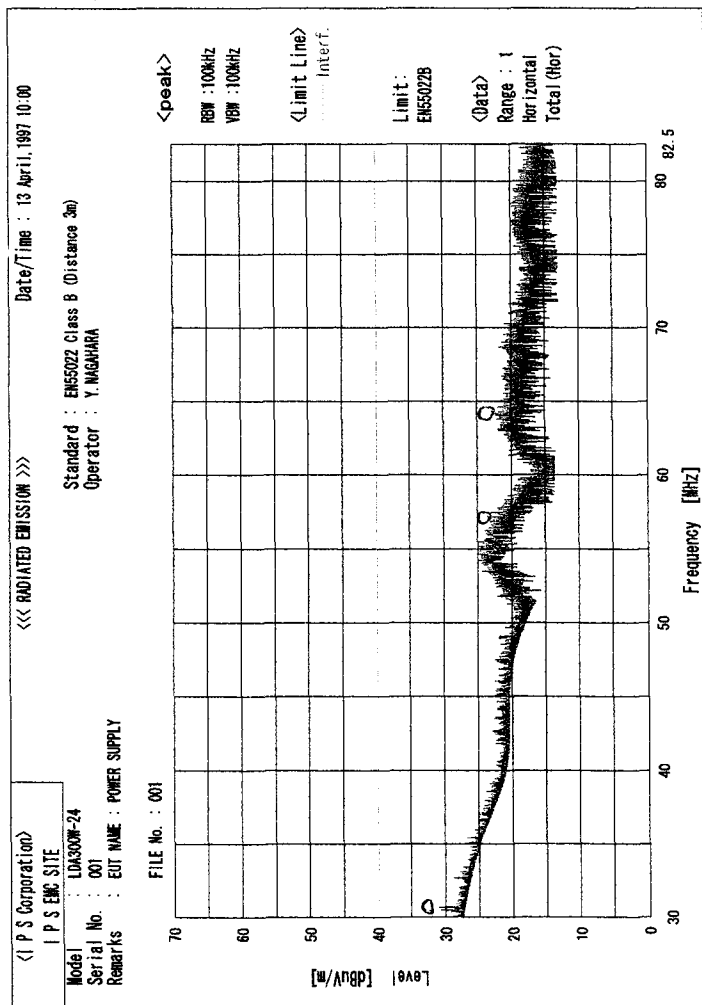

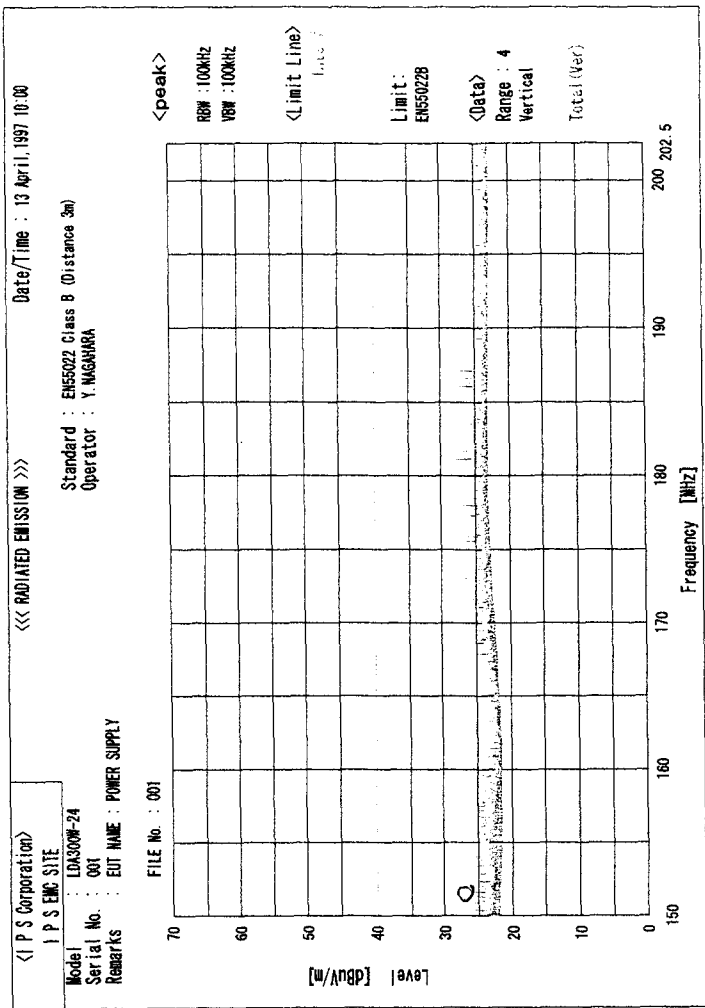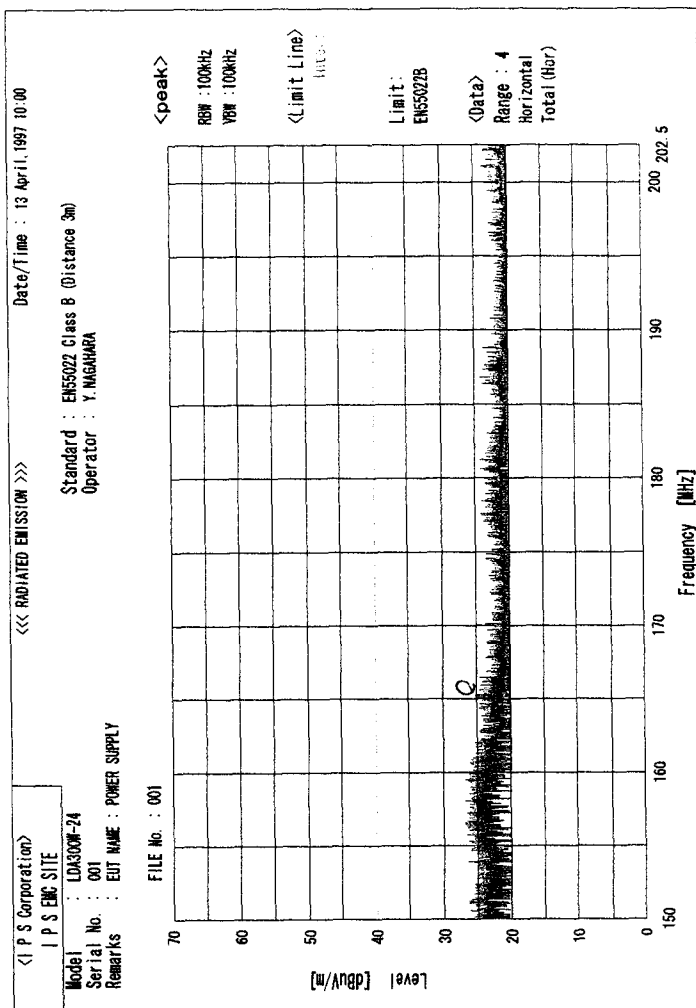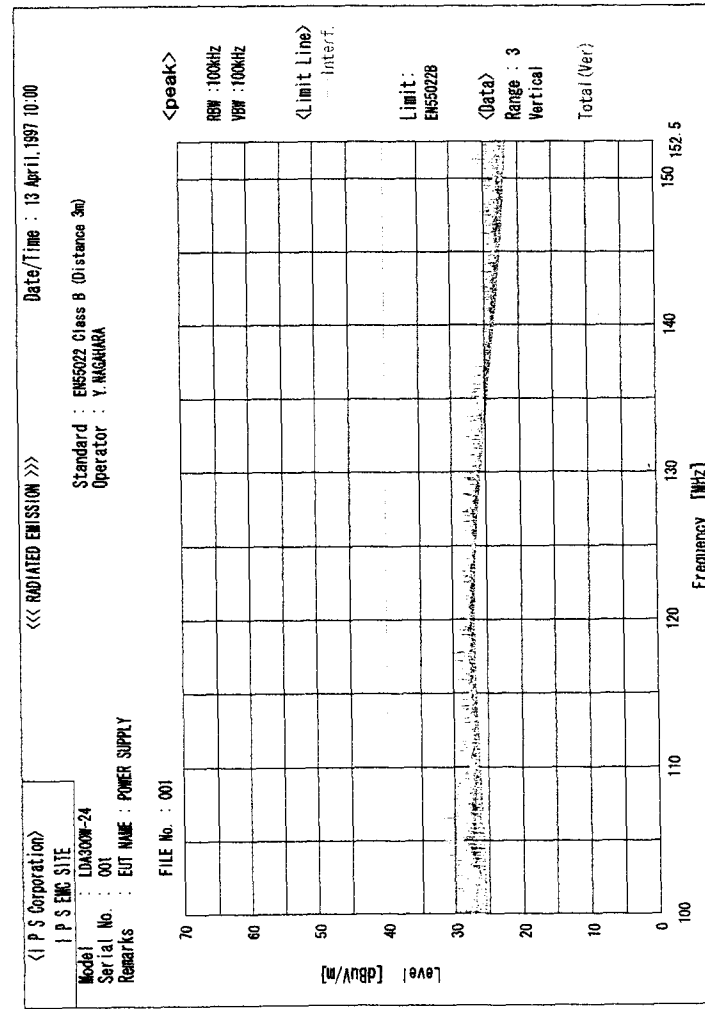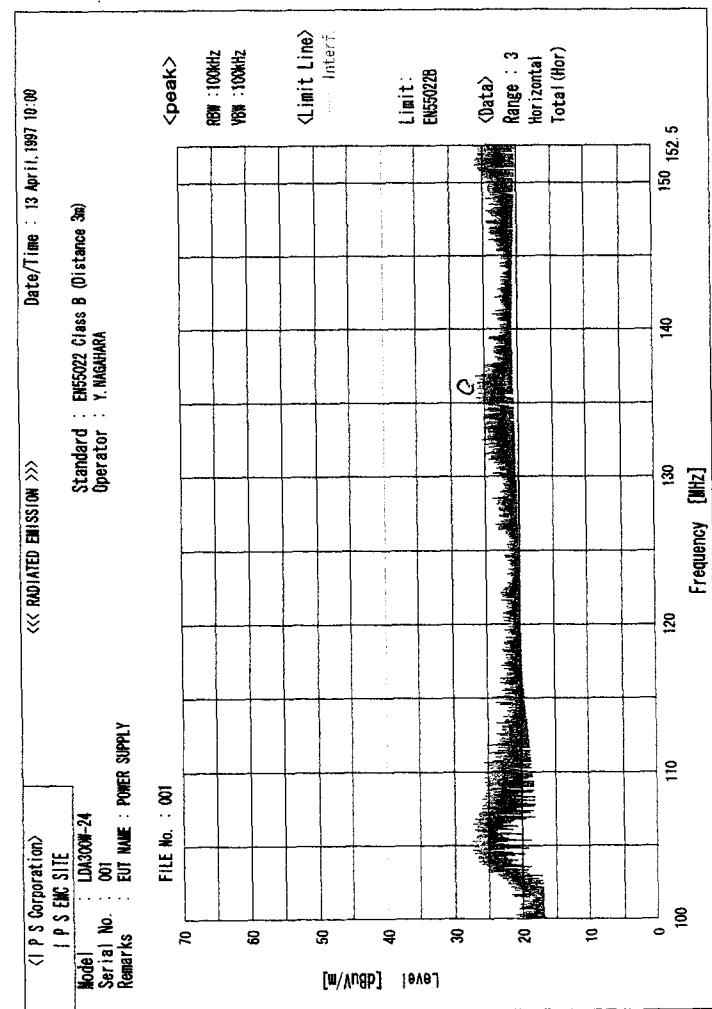

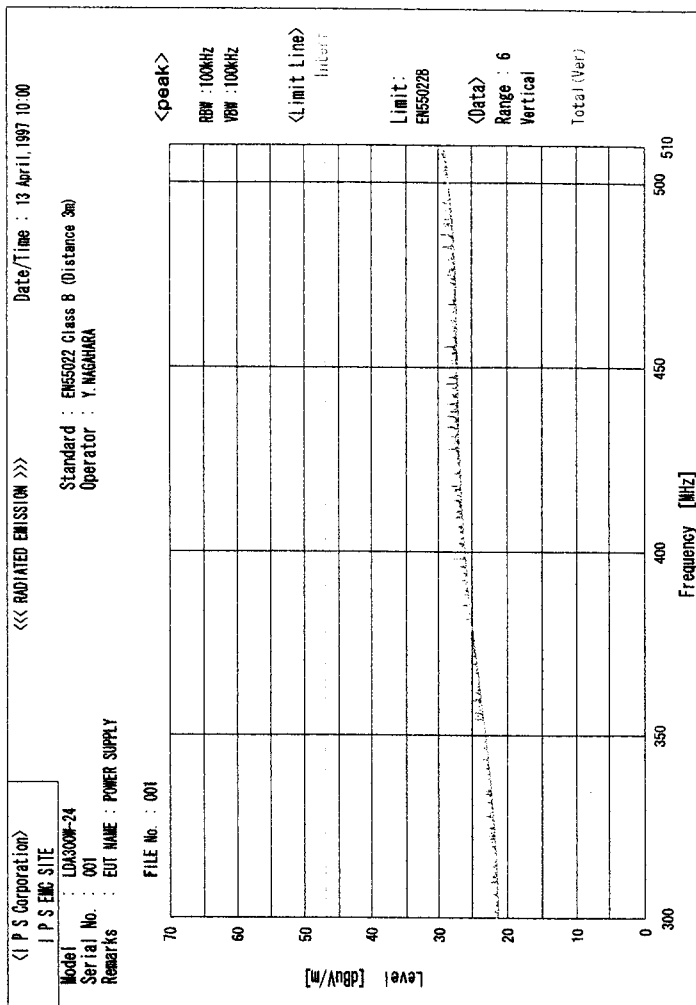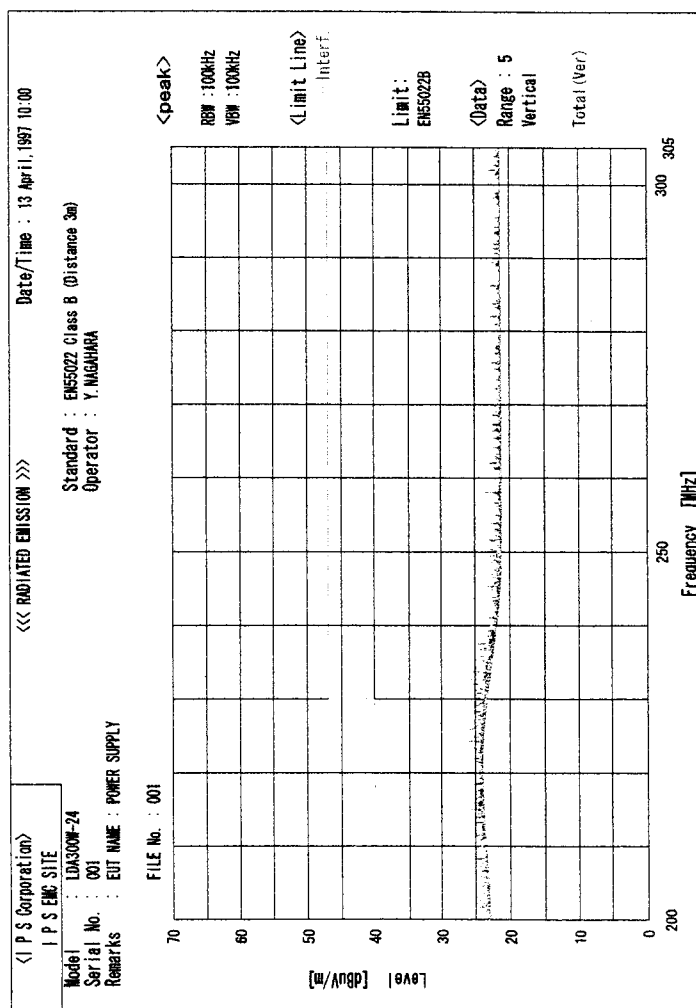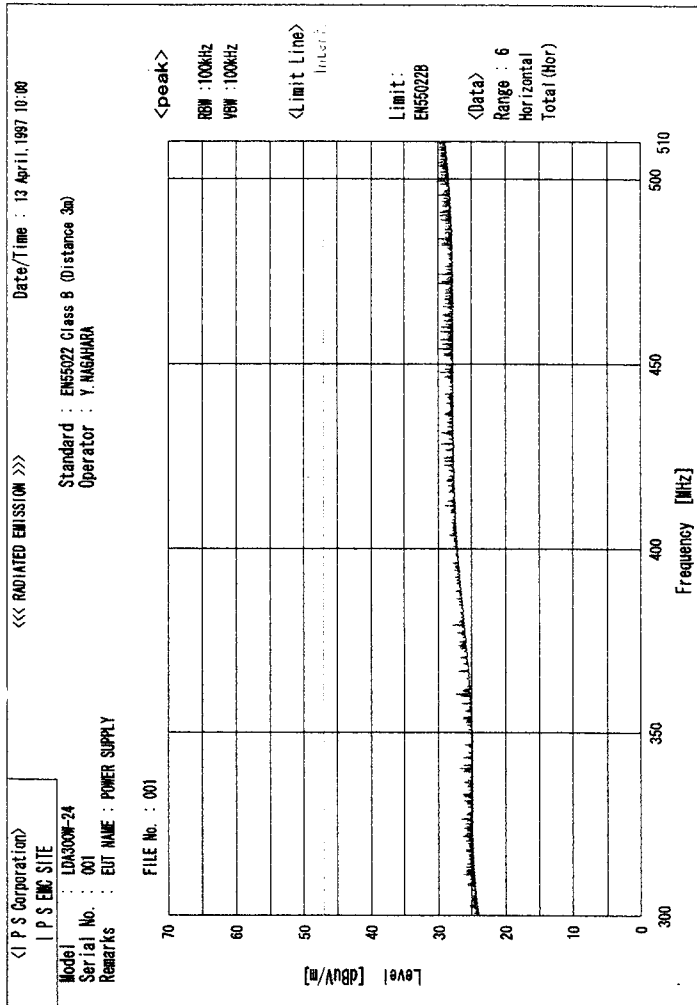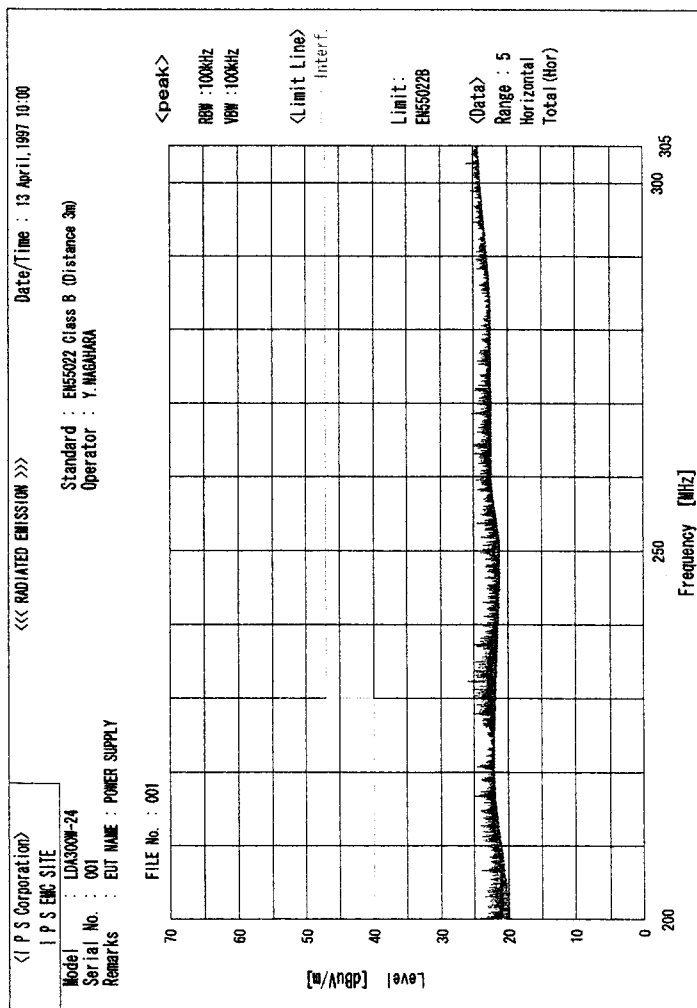

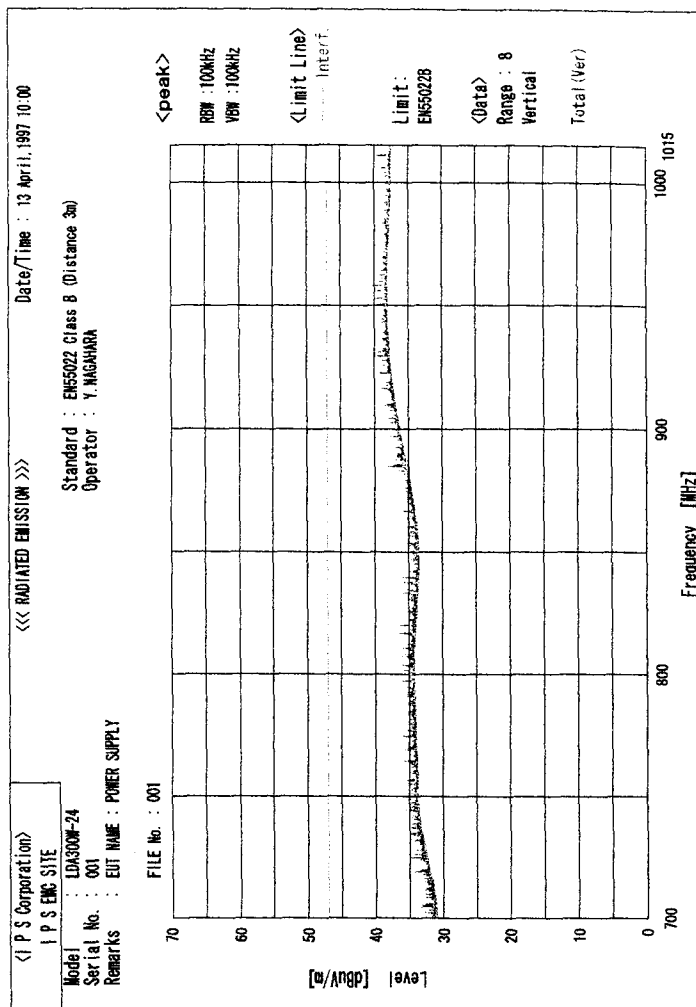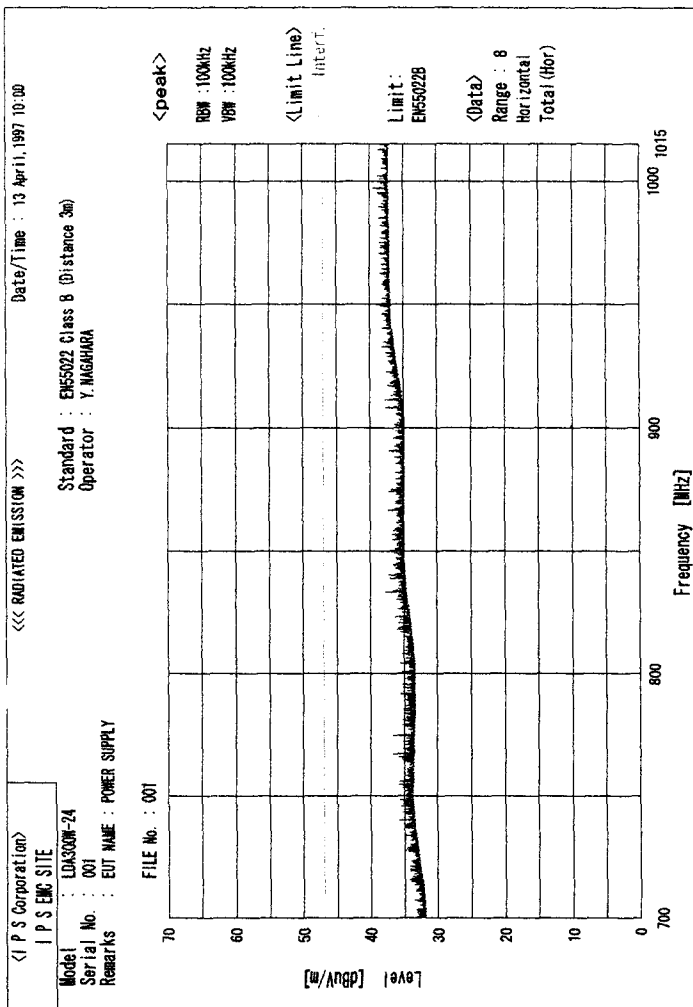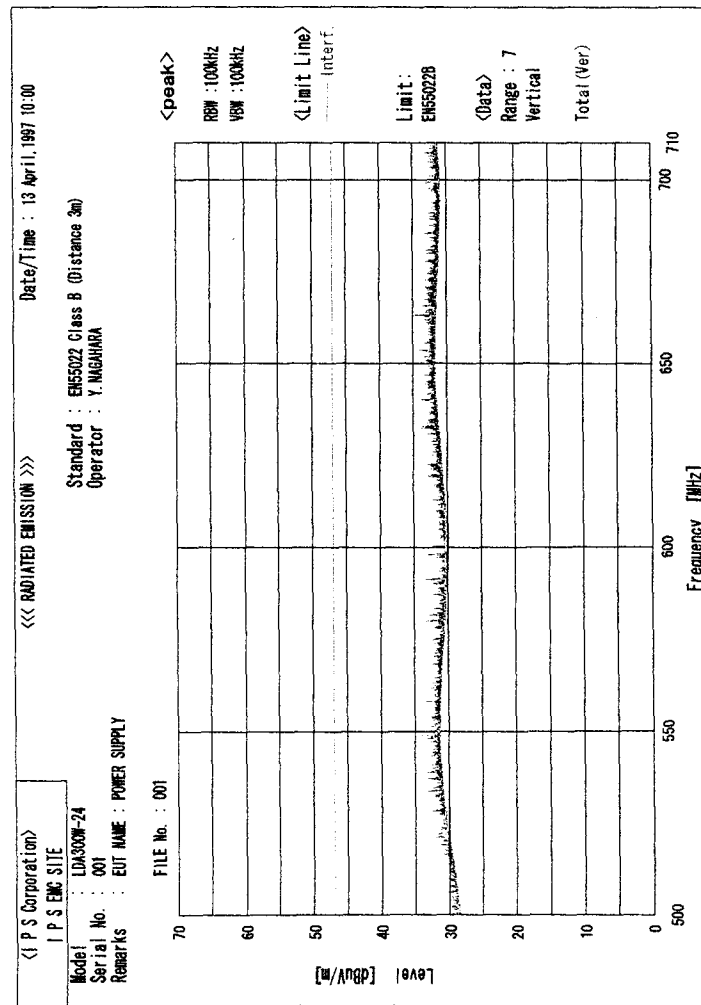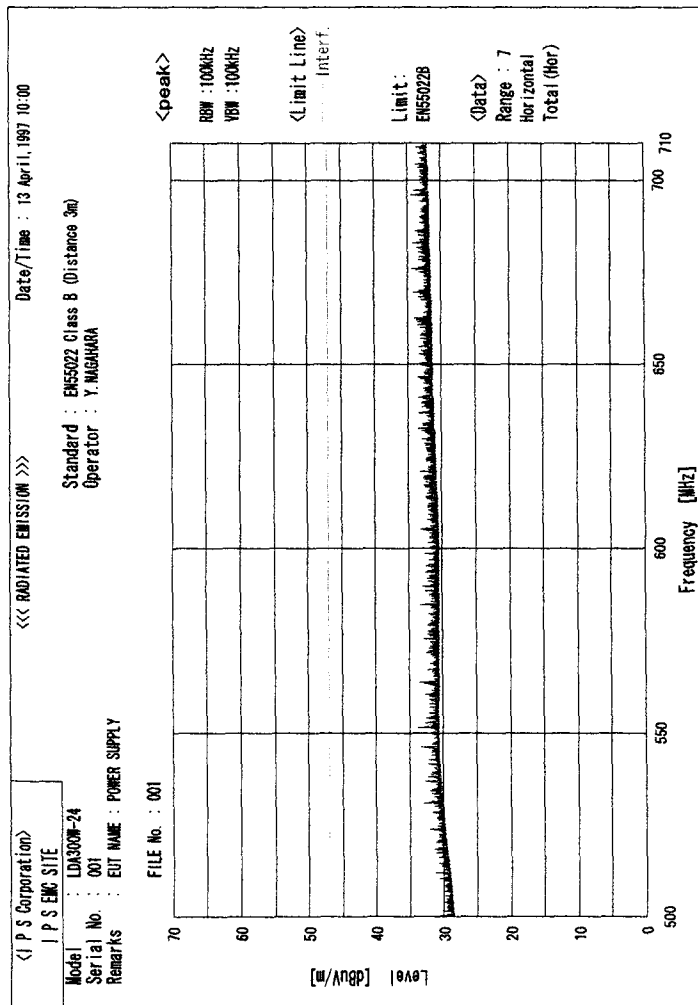

\*\*\*\*\* <I P S Corporation> \*\*\*\*\*  
 <<< CONDUCTED EMISSION >>>

23 April, 1997 20:28  
 Page 1

Model : COSEL LDA300W-24  
 Serial No. : 001  
 Standard : EN55022 Class B  
 Condition File : 104  
 :  
 Remark : EUT NAME : POWER SUPPLY  
 :  
 : FILE No. : 001  
 AC Power : 230 V 50 Hz  
 Temperature : 22 deg.  
 Humidity : 40 %  
 Operator : Y.NAGAHARA

----- Results -----

No.	Frequency [MHz]	Reading		c.f. [dB]	Result		Limit		Margin	
		QP [dBuV]	AV [dBuV]		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dB]	AV [dB]
Phase N										
1	0.15000	28.4		10.0	38.4		66.0	56.0	27.6	
2	0.26070	32.2		10.0	42.2		61.4	51.4	19.2	
3	0.65540	21.2		10.0	31.2		56.0	46.0	24.8	
4	1.04930	21.8		10.0	31.8		56.0	46.0	24.2	
5	2.36300	21.4		10.0	31.4		56.0	46.0	24.6	
6	16.28420	25.8		10.6	36.4		60.0	50.0	23.6	
Phase L1										
1	0.15000	28.5		10.0	38.5		66.0	56.0	27.5	
2	0.26130	28.9		10.0	38.9		61.4	51.4	22.5	
3	0.65560	25.2		10.0	35.2		56.0	46.0	20.8	
4	1.96870	25.5		10.0	35.5		56.0	46.0	20.5	
5	2.49370	25.7		10.0	35.7		56.0	46.0	20.3	
6	29.94380	24.5		11.0	35.5		60.0	50.0	24.5	

< I P S Corporation >  
I P S EMC SITE


<<< CONDUCTED EMISSION >>>

Date: 23 April, 1997

Model : COSEL LDA300W-24  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : Y. NAGAHARA

FILE No. : 001

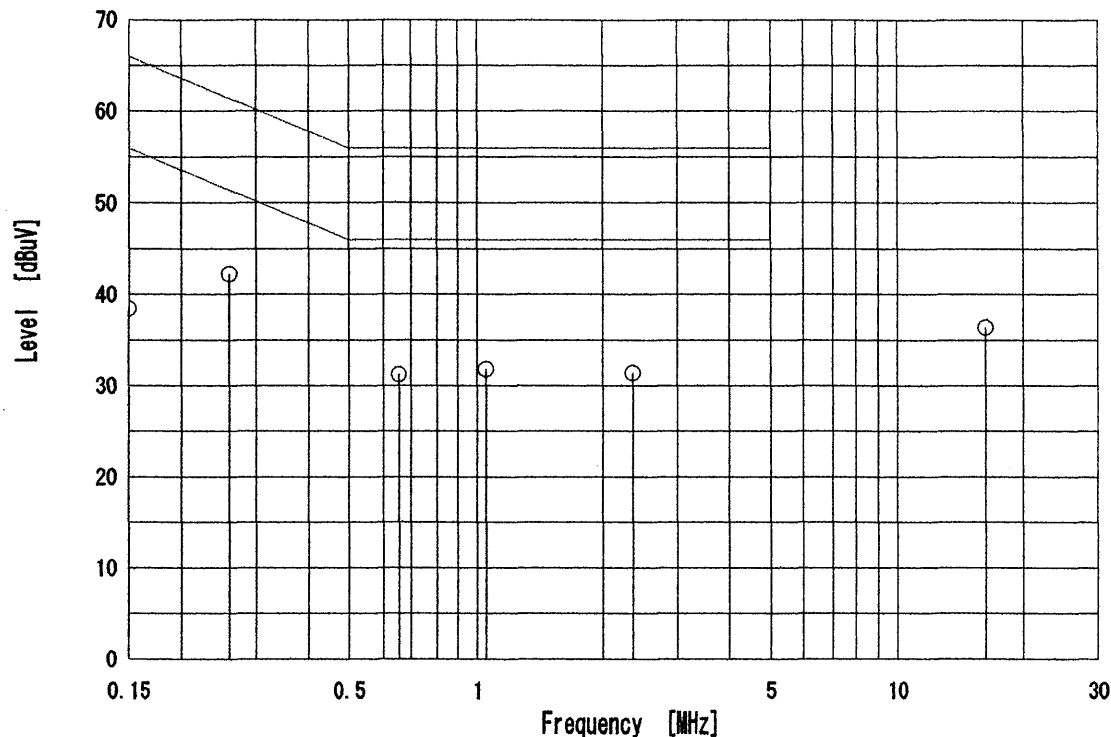

<Limit Line>  
— QP  
— AV

Limit:  
EN55022B

<Data>  
Line Phase  
N  
○ QP  
◇ AV

< I P S Corporation >  
I P S EMC SITE


<<< CONDUCTED EMISSION >>>

Date: 23 April, 1997

Model : COSEL LDA300W-24  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : Y. NAGAHARA

FILE No. : 001

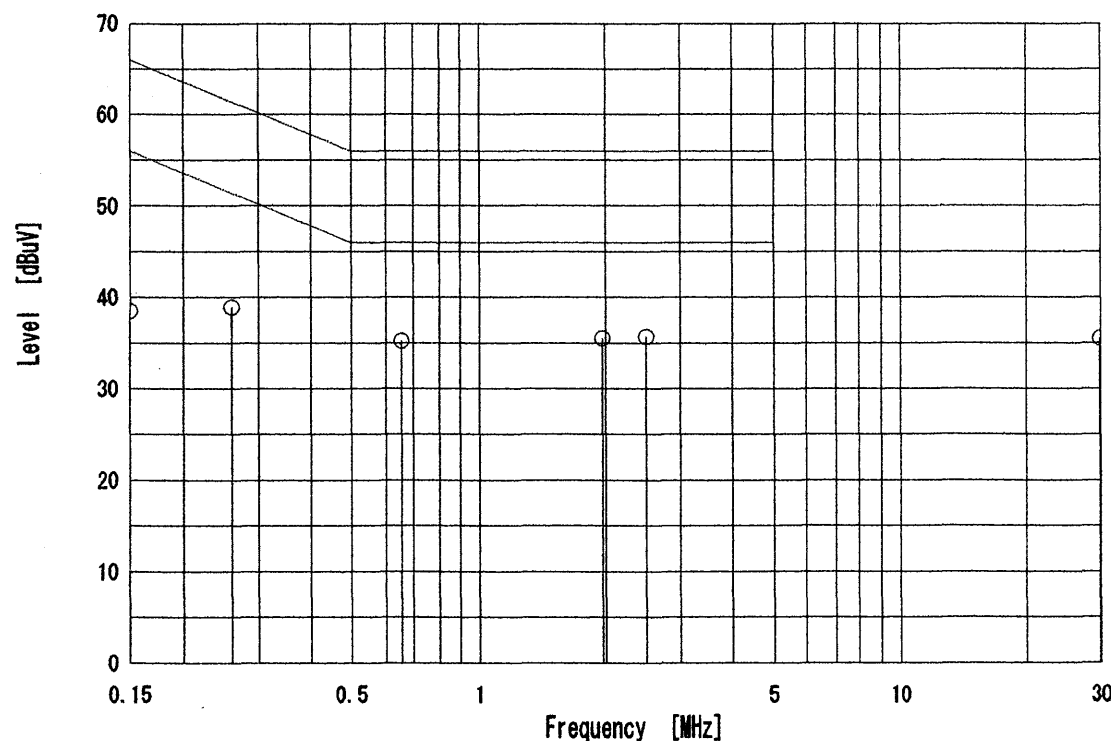

<Limit Line>  
— QP  
— AV

Limit:  
EN55022B

<Data>  
Line Phase  
L1  
○ QP  
◇ AV



<I P S Corporation>  
I P S EMC SITE


<<< CONDUCTED EMISSION >>>

Date/Time : 23 April, 1997 20:07

Model : COSEL LDA300W-24  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : Y. NAGAHARA

FILE No. : 001

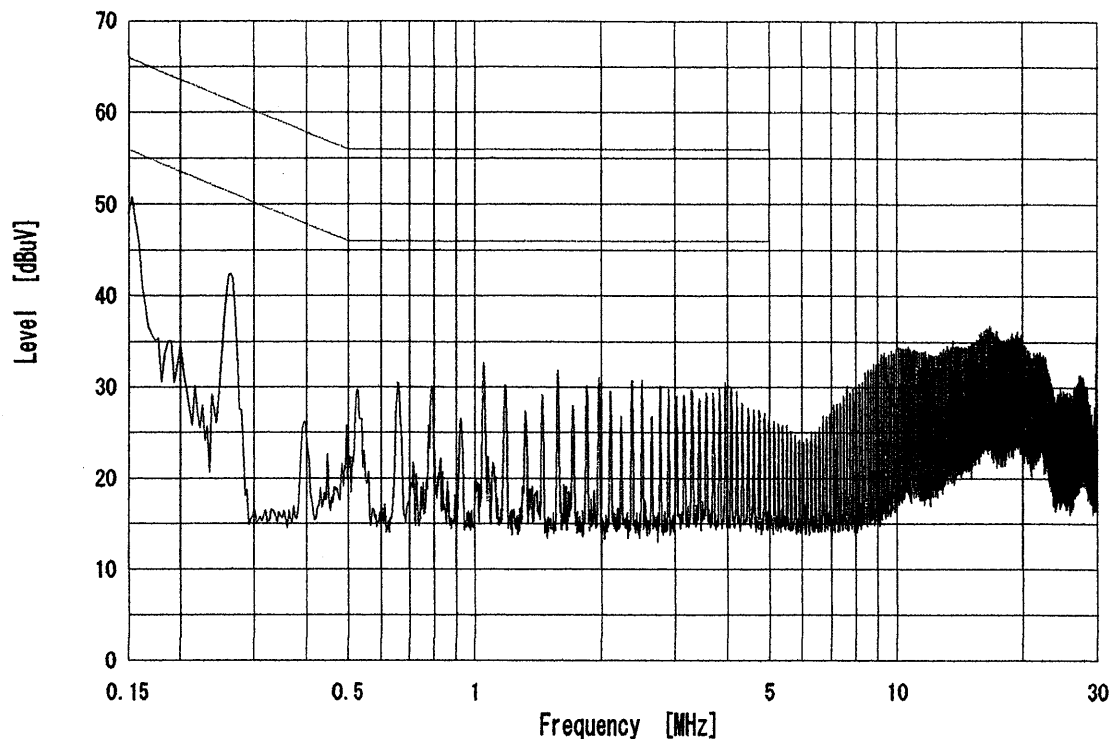

<peak>

<Limit Line>

— QP  
— AV

Limit:  
EN55022B

<Data>  
Line Phase  
N

<I P S Corporation>  
I P S EMC SITE


<<< CONDUCTED EMISSION >>>

Date/Time : 23 April, 1997 20:13

Model : COSEL LDA300W-24  
Serial No. : 001  
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B  
Operator : Y. NAGAHARA

FILE No. : 001

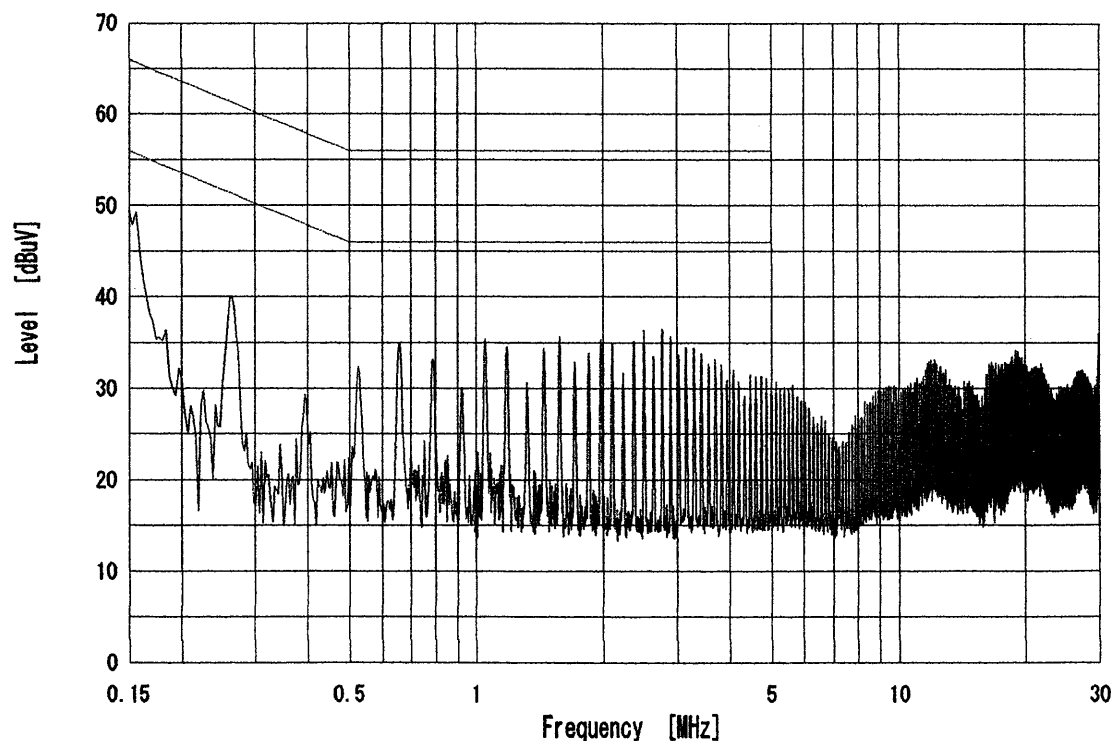

<peak>

<Limit Line>

— QP  
— AV

Limit:  
EN55022B

<Data>  
Line Phase  
L1