



EXTRA TEST DATA OF PDA300F-36

*Regulated DC Power Supply
Apr, 20, 2026*

COSEL CO.,LTD.




CONTENTS

1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Hiccup cycle (by Overcurrent Protection)	3
4.Figure of Testing Circuitry	4

(Final Page 4)




COSEL

Model	PDA300F-36	Temperature	25°C
Item	Inrush Current (enlargement)	Testing Circuitry	A
Object	_____		

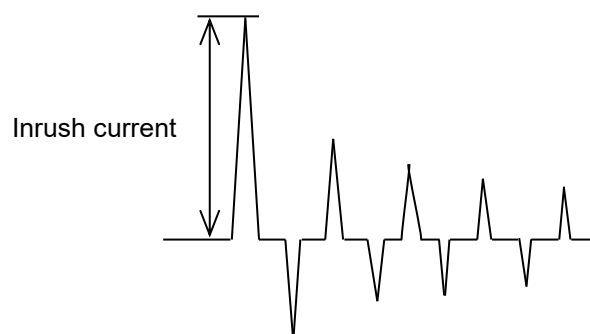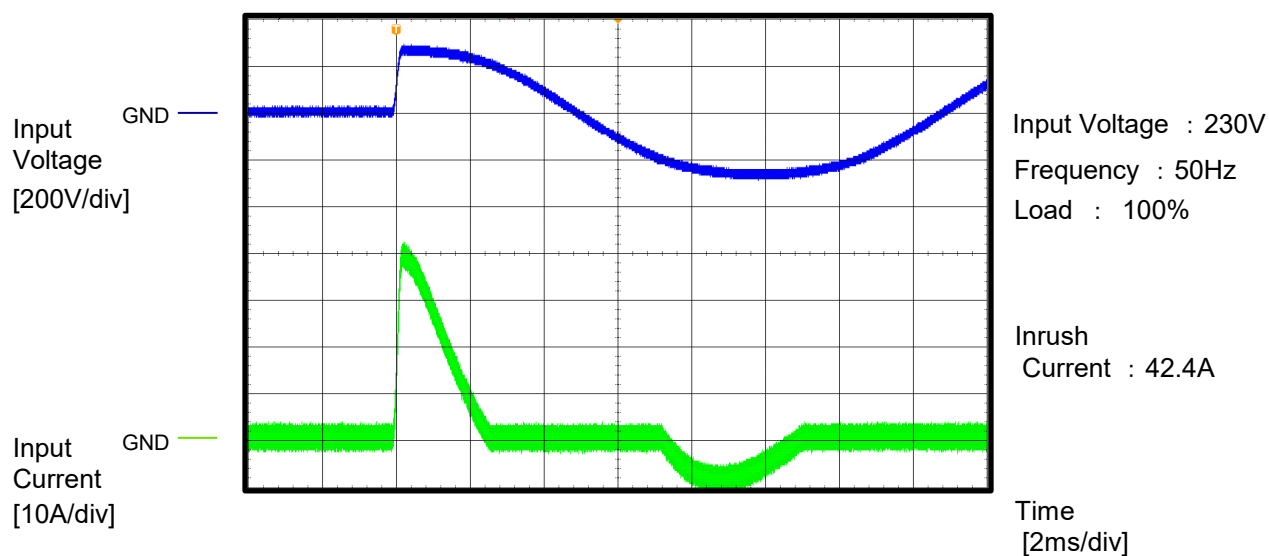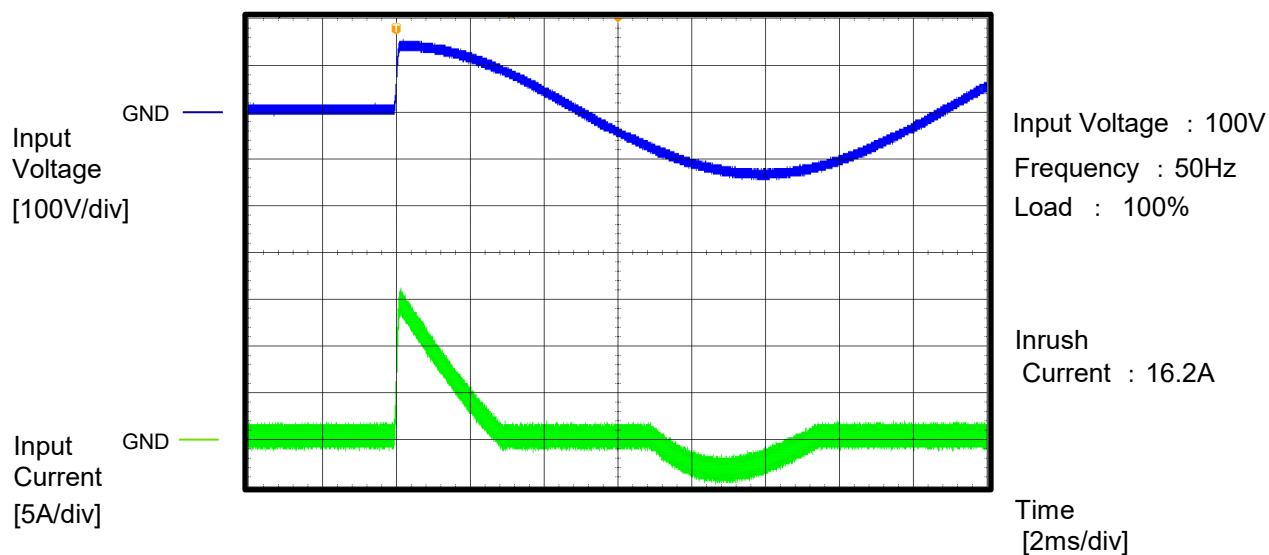

COSEL

Model	PDA300F-36	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

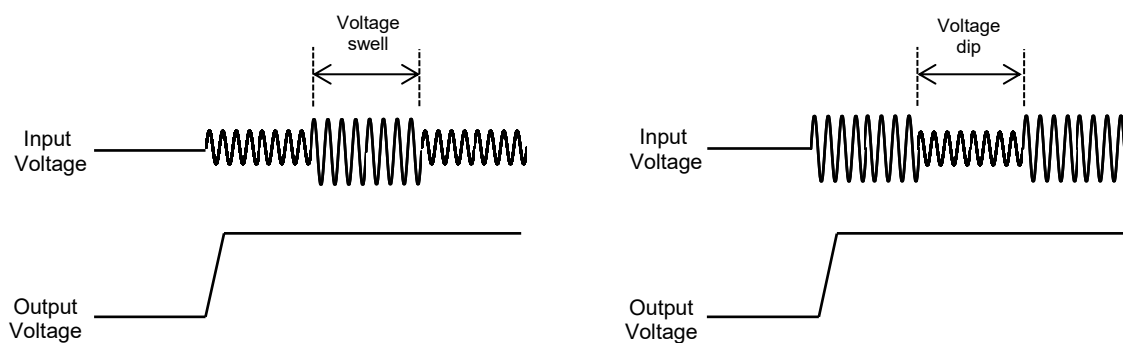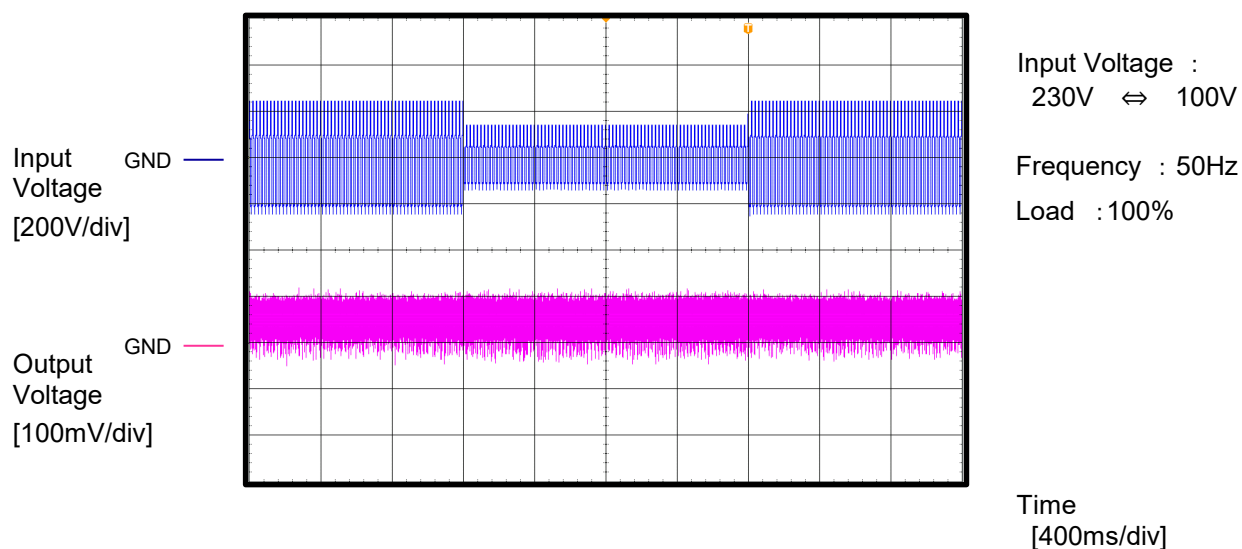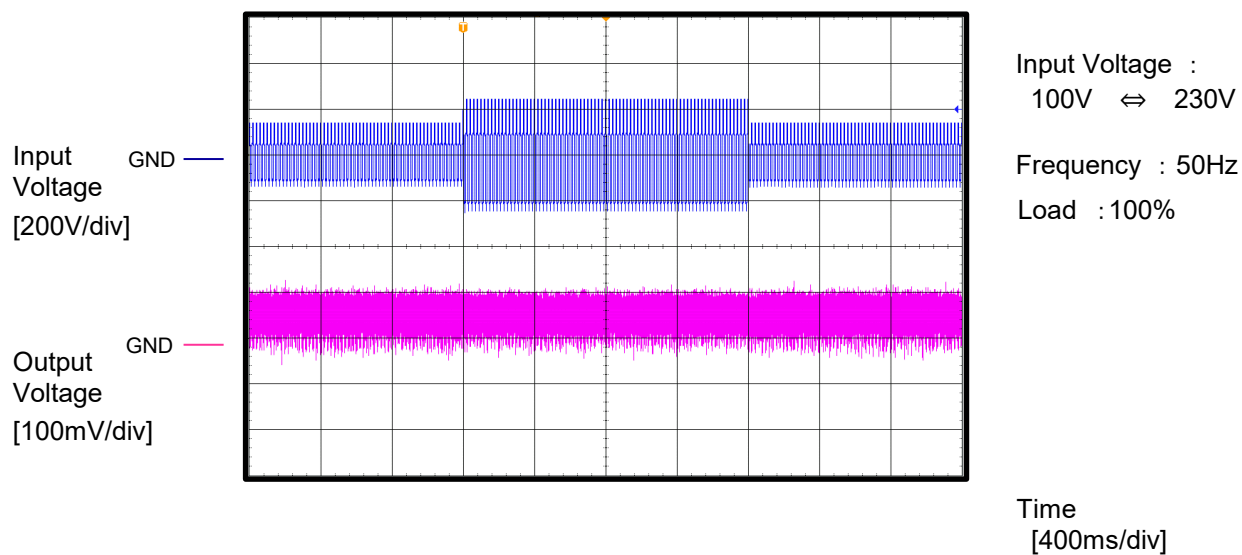


COSEL

Model	PDA300F-36	Temperature	25°C
Item	Hiccup cycle (by Overcurrent Protection)	Testing Circuitry	A
Object		Load	: Short

Output
Current
[5A/div]

GND

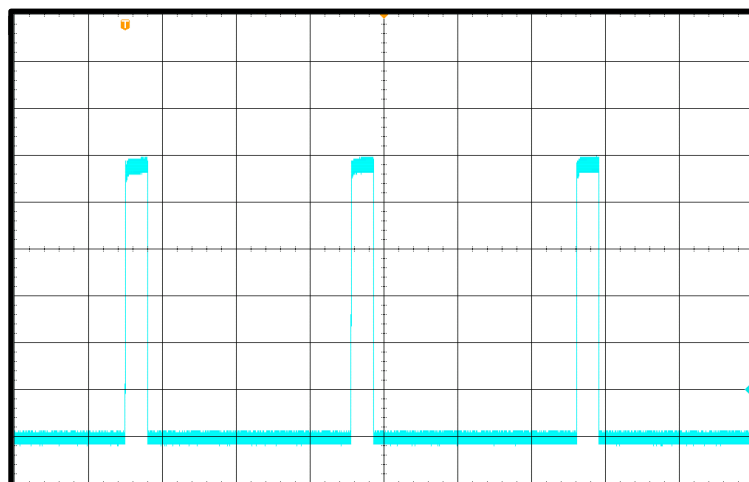

Input Voltage : 100V

Short-circuit
current : 30A


ON Time : 601ms

Hiccup mode
time : 6117ms

Time
[2000ms/div]

Output
Current
[5A/div]

GND

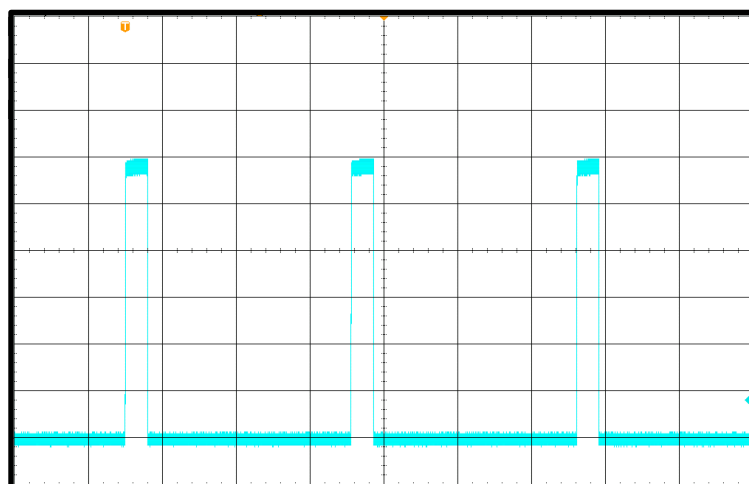

Input Voltage : 230V

Short-circuit
current : 29.8A

ON Time : 601ms

Hiccup mode
time : 6117ms

Time
[2000ms/div]

