



DATA SHEET		Date	10-Aug-11
Model	PLA600F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

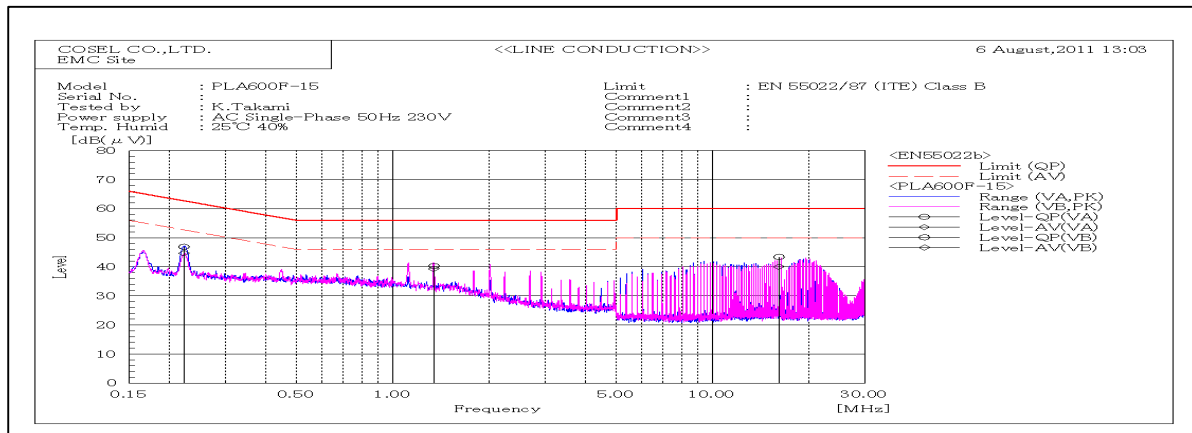


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.22242	VA	36.8	34.6	10.1	46.9	44.7	62.7	52.7	15.8	8	Pass	
1.34519	VB	30.1	29.2	10.1	40.2	39.3	56	46	15.8	6.7	Pass	
16.1316	VA	32.6	29.2	10.8	43.4	40	60	50	16.6	10	Pass	

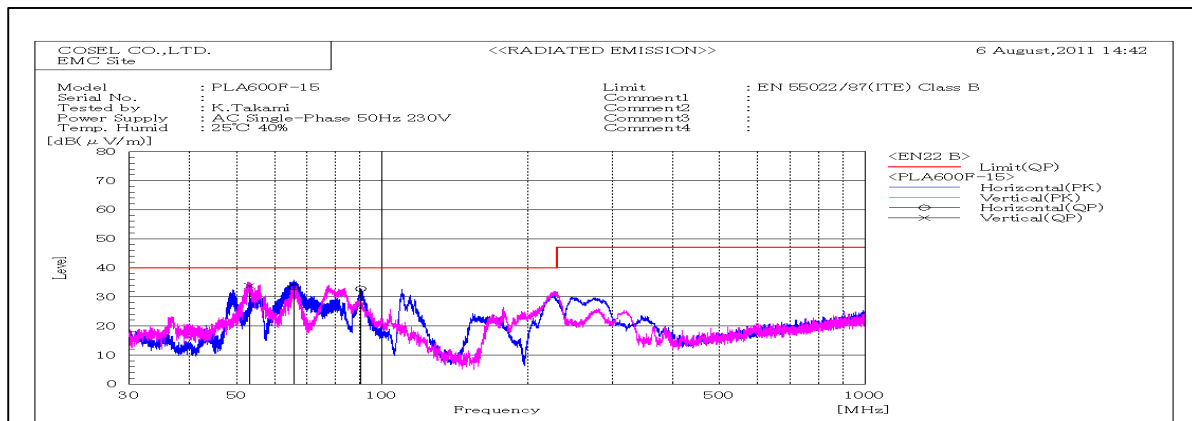

Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
				QP	QP	QP				
90.34	H	55.7	-22.9	32.8	40	7.2	Pass	148	198	
65.665	H	59.3	-25.9	33.4	40	6.6	Pass	148	74	
53.164	V	55.2	-21.5	33.7	40	6.3	Pass	125	5	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

## 1. Line conduction

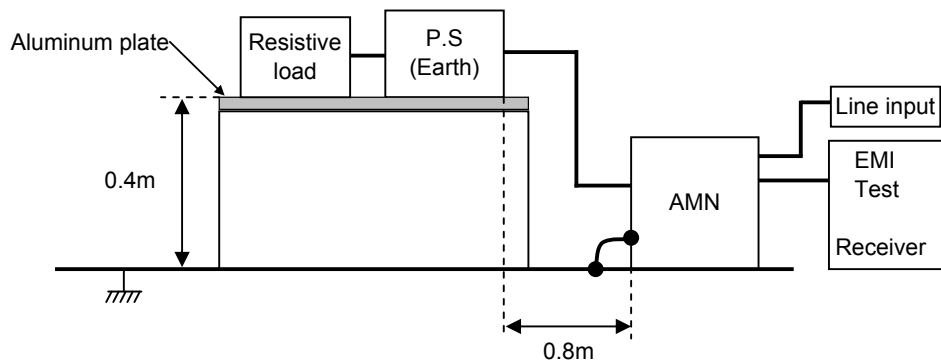

## 2. Radiated emission

